

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMLC0063798
WELL NAME & NO.:	131H:Charles Ling Fed Com
SURFACE HOLE FOOTAGE:	360'/N & 1950'/W
BOTTOM HOLE FOOTAGE:	240'/S & 1649'/W
LOCATION:	T-24S, R-33E, S11. NMPM
COUNTY:	LEA, NM

Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	
Other	☐ 4 String Area	☐ Capitan Reef	☐ WIPP

A. Hydrogen Sulfide

1. Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The 13 3/8 inch surface casing shall be set at approximately **1345** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours

after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the 9 5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The minimum required fill of cement behind the 5 1/2 inch production casing is:
 - Cement should tie-back at least **200** feet into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).

2.

Option 1:

- i. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use 5M Annular which shall be tested to 5000 psi.**

Option 2:

- i. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use 5M Annular which shall be tested to 5000 psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
- e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

D. SPECIAL REQUIREMENT(S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Waste Minimization Plan (WMP)

In the interest of resource development, submission of additional well gas capture development plan information is deferred but may be required by the BLM Authorized Officer at a later date.

MHH 09292018

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Chaves and Roosevelt Counties
Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.
During office hours call (575) 627-0272.
After office hours call (575)

☒ Eddy County
Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County
Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the

plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

HOBBS OCD
OCT 24 2018
RECEIVED

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMLC0063798
WELL NAME & NO.:	200H:LEA UNIT
SURFACE HOLE FOOTAGE:	360'/N & 1905'/W
BOTTOM HOLE FOOTAGE	240'/S & 1649'/W
LOCATION:	T-24S, R-33E, S11. NMPM
COUNTY:	LEA, NM

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Karst
 - Range
 - Watershed
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Cattle Guard Requirement

Any new or existing cattle guards on the access route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations. Once the road is abandoned, the fence would be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Livestock Watering Requirement

Structures that provide water to livestock, such as windmills, pipelines, drinking troughs, and earthen reservoirs, will be avoided by moving the proposed action.

Any damage to fences, cattle guards, and pipelines or structures that provide water to livestock during construction, throughout the life of the project, and caused by its operation, must be immediately corrected by Matador. Matador must notify the grazing allottee or the private surface landowner and the BLM-CFO (575-234-5972) if any damage occurs to pipelines or structures that provide water to livestock.

Production facilities on the well pads would be bermed to prevent oil, salt, and other chemical contaminants from leaving the pads. Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The berm shall be maintained through the life of the well and after interim reclamation has been completed.

Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion. Stockpiling of topsoil is required. The top soil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control.

Roads will be routed around sinkholes and other karst features to avoid or lessen the possibility of encountering near surface voids and to minimize changes to runoff or possible leaks and spills from entering karst systems. Turnout ditches and drainage leadoffs will not be constructed in such a manner as to increase or decrease the natural flow of water into or out of cave or karst features. The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, cave passages, or voids are penetrated during construction and no further construction will be done until clearance has been issued by the Authorized Officer. Special restoration stipulations or realignment may be required.

All spills or leaks should be reported to the BLM immediately for their immediate and proper treatment.

To avoid or lessen the potential of subsidence or collapse of karst features, toxic or combustible gas buildup, or other possible impacts to cave and karst resources from buried pipelines or cables, alignments may be rerouted to avoid karst features. The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, passages, or voids are intersected by trenching, and no pipe will be laid in the trench at that point until clearance has been issued by the Authorized Officer. Special restoration stipulations or realignment may be required at such intersections, if any. Leak detection systems, back flow eliminators, and differential pressure shut-off valves may be required to minimize the impacts of leaking or ruptured pipelines. To eliminate these extreme possibilities, good record keeping is needed to quickly identify leaks for their immediate and proper treatment.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

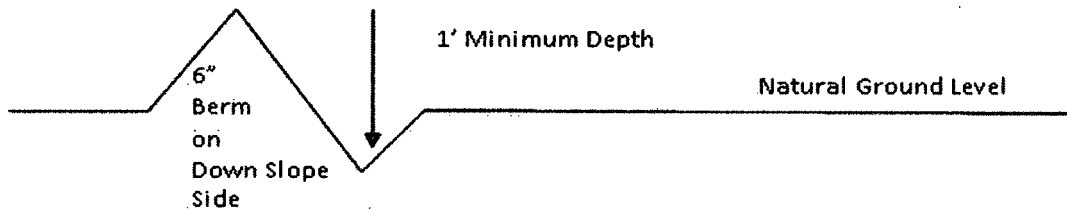

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.


Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.


Construction Steps

1. Salvage topsoil
2. Construct road


3. Redistribute topsoil
4. Revegetate slopes

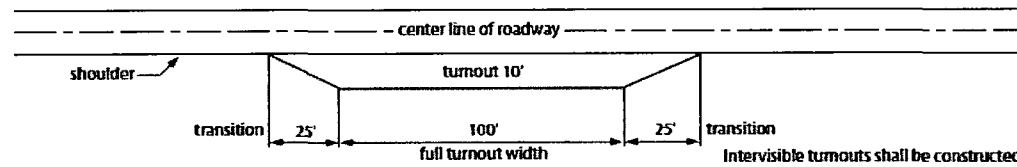


Typical Turnout Plan




Level Ground Section

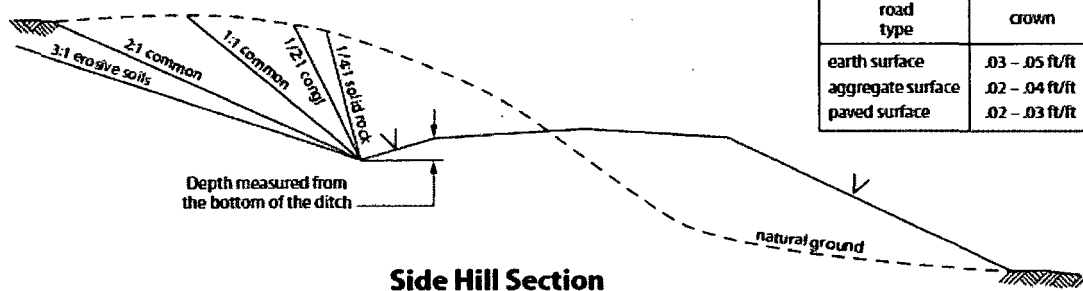

Side Hill Section

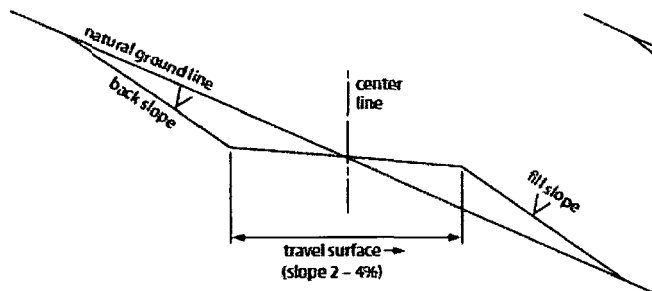

Typical Outsloped Section

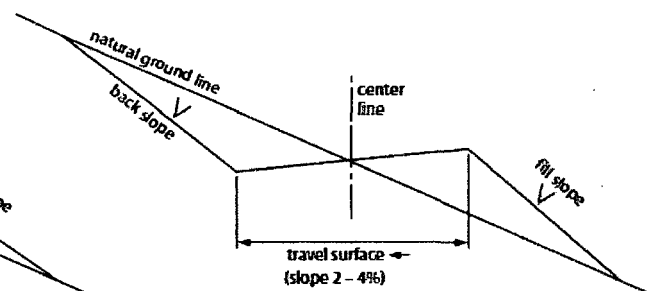

Typical Insloped Section

Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:
- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| ☐ seed mixture 1 | ☐ seed mixture 3 |
| ☒ seed mixture 2 | ☐ seed mixture 4 |
| ☐ seed mixture 2/LPC | ☐ Aplomado Falcon Mixture |

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or

other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.

5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the

Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species	lb/acre
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

10/08/2018

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Brian Wood

Signed on: 07/23/2018

Title: President

Street Address: 37 Verano Loop

City: Santa Fe

State: NM

Zip: 87508

Phone: (505)466-8120

Email address: afmss@permitswest.com

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



Hydrogen Sulfide Drilling

Operations Plan

Matador Resources

1 H2S safety instructions to the following:

- Characteristics of H2S
- Physical effects and hazards
- Principal and operation of H2S detectors, warning system and briefing areas
- Evacuation procedures, routes and first aid
- Proper use of safety equipment & life support systems
- Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30min pressure demand air packs

2 H2S Detection and Alarm Systems:

- H2S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure / cellar area, on the mud pits in the shale shaker area. Additional H2S detectors may be placed as deemed necessary
- An audio alarm system will be installed on the derrick floor and in the doghouse

3 Windsocks and / Wind Streamers:

- Windsocks at mud pit area should be high enough to be visible
- Windsock on the rig floor and / top of doghouse should be high enough to be visible

4 Condition Flags and Signs:

- Warning sign on access road to location
- Flags to be displayed on sign at entrance to location
 - Green Flag – Normal Safe Operation Condition
 - Yellow Flag – Potential Pressure and Danger
 - Red Flag – Danger (H2S present in dangerous concentrations) Only H2S trained personnel admitted on location

5 Well Control Equipment:

- See Exhibit E-1

6 Communication:

- While working under masks chalkboards will be used for communications
- Hand signals will be used where chalk board is inappropriate
- Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.



7 Drilling Stem Testing:

- No DST cores are planned at this time

8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubulars good and other mechanical equipment

9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary

11 Emergency Contacts

- See exhibit E-6

Exhibit E-6: H2S Contingency Plan Emergency Contacts
Charles Ling Fed Com Slot 2
Wells 132H, 202H, & 212H
Matador Resources Company
Sec. 11, 24S, 33E
Lea County, NM


<u>Company Office</u>			
Matador Resources Company		(972)-371-5200	
<u>Key Personnel</u>			
Name	Title	Office	Mobile
Billy Goodwin	Vice President Drilling	972-371-5210	817-522-2928
Dee Smith	Drilling Superintendent	972-371-5447	972-822-1010
Blake Hermes	Drilling Engineer	972-371-5485	713-876-8558
	Construction Superintendent		
	Construction Superintendent		
<u>Artesia</u>			
Ambulance		911	
State Police		575-746-2703	
City Police		575-746-2703	
Sheriff's Office		575-746-9888	
Fire Department		575-746-2701	
Local Emergency Planning Committee		575-746-2122	
New Mexico Oil Conservation Division		575-748-1283	
<u>Carlsbad</u>			
Ambulance		911	
State Police		575-885-3137	
City Police		575-885-2111	
Sheriff's Office		575-887-7551	
Fire Department		575-887-3798	
Local Emergency Planning Committee		575-887-6544	
New Mexico Oil Conservation Division		575-887-6544	
<u>Santa Fe</u>			
New Mexico Emergency Response Comission (Santa Fe)		505-476-9600	
New Mexico Emergency Response Comission (Santa Fe) 24 hrs		505-827-9126	
New Mexico State Emergency Operations Center		505-476-9635	
<u>National</u>			
National Emegency Response Center (Washington, D.C.)		800-424-8802	
<u>Medical</u>			
Flight for Life- 4000 24th St.; Lubbock, TX		806-743-9911	
Aerocare- R3, Box 49F; Lubbock, TX		806-747-8923	
Med Flight Air Amb- 2301 Yale Blvd S.E., D3; Albuquerque, NM		505-842-4433	
SB Air Med Service- 2505 Clark Carr Loop S.E.; Albuquerque, NM		505-842-4949	
<u>Other</u>			
Boots & Coots IWC	800-256-9688	or 281-931-8884	
Cudd Pressure Control	432-699-0139	or 432-563-3356	
Haliburton	575-746-2757		
B.J. Services	575-746-3569		

Matador Production Company

Charles Ling Fed Com #132H
H₂S Contingency Plan:
2 Mile Radius Map

Section 11, T.23S R.33E
Lea County, New Mexico



⊙ Surface Hole Location



NAD 1983 New Mexico State Plane East
FIPS 3001 Foot

PERMITS WEST

Prepared by Permits West, Inc., May 15, 2018
for Matador Production Company

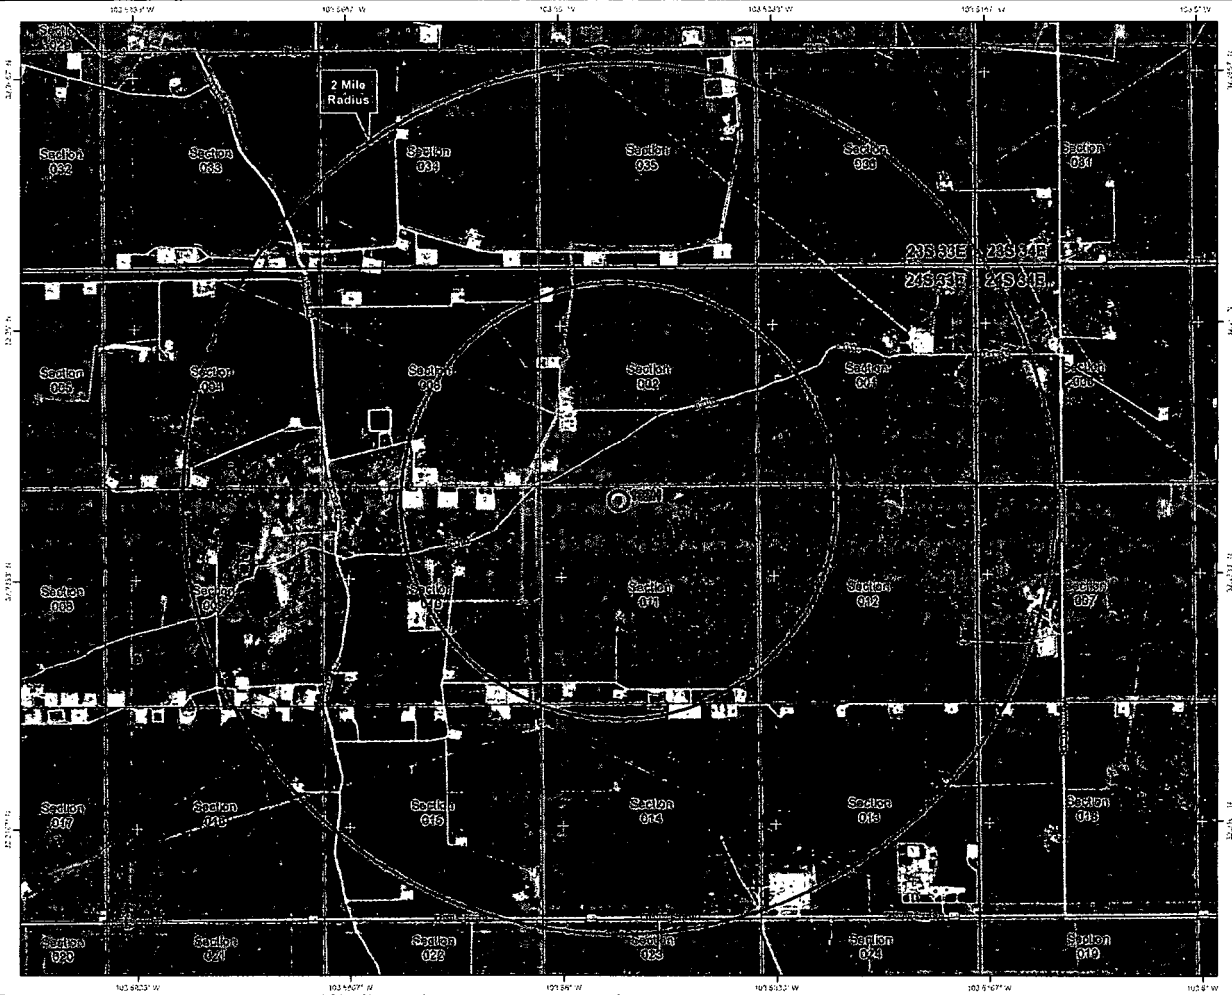

HYDROGEN SULFIDE CONTINGENCY PLAN Drilling, Testing, & Completion

MRC ENERGY CO.

Charles Ling Fed Com Slot 2 Wells

Reviewers

----- Operations Manager
----- Operations Supt.
----- Staff RES
----- Field Supv.
Blake Hermes---Engineering

**Latitude: 32.2383" N
Longitude: 103.5452" W**

**Charles Ling Fed Com #132
SHL 360' FNL & 1905' FWL, Sec. 11
BHL 240' FSL & 1649' FWL, Sec. 11**

**Charles Ling Fed Com #202
SHL 360' FNL & 1875' FWL, Sec. 11
BHL 240' FSL & 2307' FWL, Sec. 11**

**Charles Ling Fed Com #212
SHL 360' FNL & 1845' FWL, Sec. 11
BHL 240' FSL & 1649' FWL, Sec. 11**

H2S Contingency Plan # 0165 Revision# 0

This H2S Contingency Plan is subject to updating

Effective date: July 8, 2015

Rig Diagram

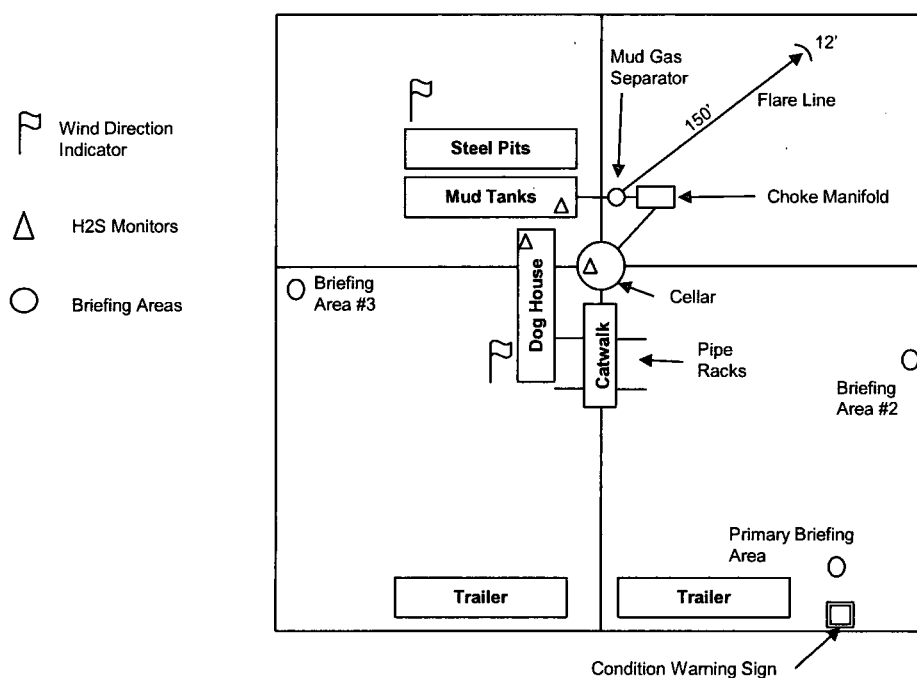


Exhibit E-3: Rig Diagram
Charles Ling Fed Com
Slots 1, 2, 3, & 4 Well Pads
Matador Resources Company
11-24S-33E
Lea County, NM

N

Figure 3:
Drilling Rig Layout



TABLE OF CONTENTS

I.	INTRODUCTION	3
II.	PURPOSE	4
	A. Operating Procedures	5
	B. Procedures to be Initiated Prior to reaching H2S Contingency Plan Compliance	6
	C. Drilling Below Contingency Plan Depth	7
	D. Procedures program	7
III.	CONDITIONS & H₂S EMERGENCY PROCEDURES	10
	A. Definition of Operational "Conditions"	10
	B. H2S Emergency Procedures; In Scope Personnel	12
	C. Instructions for Igniting the Well	16
	D. Coring	17
	E. Normal Operations	18
IV.	SAFETY EQUIPMENT	21
V.	TOXICITY OF VARIOUS GASES	23
VI.	PROPERTIES OF GASES	24
VII.	TREATMENT PROCEDURES FOR H2S POISONING	25
VIII.	BREATHING AIR EQUIPMENT DRILLS ON/OFF DUTY	26
IX.	HYDROGEN SULFIDE TRAINING CURRICULUM	27
X.	FIT TEST	29
XI.	H2S EQUIPMENT LIST	30
XII.	EMERGENCY PHONE NUMBERS	32
XIII.	EVACUATION OF GENERAL PUBLIC	37
XIV.	SEPCO EMERGENCY PHONE NUMBERS AND DIRECTIONS TO WELL SITE	38
XV.	ROE MAP (RADIUS OF EXPOSURE)	39
XVI.	RESIDENCE LIST WITHIN ROE	40

INTRODUCTION

The H₂S equipment will be rigged up 2 days prior to reaching a potential H₂S containing zone. Drilling into any potential H₂S zone shall not commence until the on-site MRC Drilling Supervisor has confirmed this plan in place.

The onsite Drilling Foreman will give Total Safety one week (7 days) notice to prepare for rig up of H₂S equipment)

To be effective, the plan requires the cooperation and effort of each person participating in the drilling of an H₂S well. Each person must know his/her responsibilities and all emergency and safety procedures. He/she should thoroughly understand and be able to use with accuracy, all safety equipment while performing his/her normal duties, if the circumstance should arise. He/she should therefore familiarize himself/herself with the location of all safety equipment and check to see that it is properly stored, easily accessible at all times, and routinely maintained.

It is the intention of MRC ENERGY CO. and the Drilling Contractor to make every effort to provide adequate safeguards against harm to persons on the rig and in the immediate vicinity from the effects of hydrogen sulfide, which may be released into the atmosphere under emergency conditions. However, the initiative rests with the individual in utilizing the safeguards provided. The ideas and suggestions of the individuals involved in the drilling of this well are highly welcomed and act as a fundamental tool for providing the safest working conditions possible.

The drilling representative is required to enforce these procedures. They are set up for your safety and the safety of all others.

II. PURPOSE

It is MRC Energy Co.'s intent to provide a safe working place, not only for its employees, but also for other contractors who are aiding in the drilling of this well. The safety of the general public is of utmost concern. All precautions will be taken to keep a safe working environment and protect the public.

There is a possibility of encountering toxic hydrogen sulfide gas. Safety procedures must be adhered to in order to protect all personnel connected with the operations as well as people living within the area.

The MRC Energy Co. representative will enforce all aspects of the H2S Contingency Plan. This job will become easier by a careful study of the following pages and training and informing all personnel that will be working on the well, their duties and responsibilities.

A. OPERATING PROCEDURES

DEFINITIONS:

For purpose of this plan, on-site personnel shall be referred to as “In Scope Personnel” or “Out of Scope Personnel”, per the following definitions:

In Scope Personnel – Personnel who will be working or otherwise present in potential H₂S release areas, including the rig floor, cellar, pits, and shaker areas.

Out of Scope Personnel – Personnel who will not be working or Otherwise present in potential H₂S areas. Such personnel include rig Site visitor, delivery and camp services personnel.

GENERAL:

Before this H₂S contingency plan becomes operational, all regularly assigned In Scope Personnel (primarily the MRC, drilling contractor, and certain service personnel,) shall be thoroughly trained in the use of breathing equipment, emergency procedures, and responsibilities. Total Safety Technician or a designee assigned by the MRC Drilling Foreman shall keep a list of all personnel who have been through the on-site H₂S training program at the drill site.

All In Scope Personnel shall be given H₂S training and the steps to be taken during H₂S conditions under which the well may be drilled. General information will be explained about toxic gases, as well as the physiological effects of H₂S and the various classified operating conditions. In addition, the reader will be informed his/her general responsibility concerning safety equipment and emergency procedures.

The Total Safety H₂S Safety Technician or MRC on-site RSE Technician shall make available the H₂S Contingency Plan for all personnel to review.

Without exception, all personnel that arrive on location must proceed directly to and sign-in with the on-site MRC RSE Technician. In Scope Personnel will be required to complete an on-site H₂S training and respirator fit testing before starting work, or produce evidence that they have received equivalent training. Out of Scope Personnel will be required to complete a site H₂S awareness and general safety briefing. This briefing will consist of a H₂S hazard overview, alarm review and required response to alarms.

**B. PROCEDURES TO BE INITIATED PRIOR TO H₂S
CONTINGENCY PLAN COMPLIANCE:**

A list of emergency phone numbers and contacts will be on location and posted at the following locations:

1. MRC ENERGY CO.'S Representative's Office
2. Drilling Contractor's, Toolpusher Office
3. Living Quarters Area

All safety equipment and H₂S related hardware must be set up as required by MRC Energy Co. with regard to location of briefing areas, breathing equipment, etc. All safety equipment must be inspected periodically (at least weekly) with particular attention to resuscitators and breathing equipment.

In Scope Personnel working in the well site area will be assigned breathing apparatus. Operator and drilling contractor personnel required to work in the following areas will be provided with Self Contained Breathing Apparatus:

1. Rig Floor
2. Mud Pits
3. Derrick
4. Shale Shaker
5. Cellar

The Total Safety H₂S Safety Technician will be responsible for rigging up all H₂S continuous monitoring-type detectors. The Total Safety Technician will monitor and bump test the detector units periodically (at least at least once a week to test alarm function during drilling conditions. In the event H₂S is detected, or when drilling in a zone confirmed to contain H₂S, the units shall be bump tested at least once every 24 hours. A bump test/calibration log will be kept on location. All results will be reported to the MRC on-site Drilling Foreman.

All Total Safety H₂S equipment will be maintained and inspected by a Total Safety Technician on at least a Weekly basis.

C. DRILLING BELOW CONTINGENCY PLAN DEPTH

H₂S response drills will be held at least once per week if possible or as often as necessary to acquaint the crews and service company personnel of their responsibilities and the proper procedures to shut-in a well. Initial drills will be performed until crews demonstrate competency donning and working under mask. After the MRC Energy Co.'s representative is satisfied with initial blowout drill procedures, a drill will be conducted weekly with each crew, as necessary. The H₂S Safety Technician or designee will conduct safety talks and maintain the safety equipment, consult and carry out the instructions of the drilling supervisor. All personnel allowed in the well work area during drilling or testing operations will be instructed in the use of breathing equipment until supervisory personnel are satisfied that they are capable of using it.

After familiarization, each person must perform a drill with breathing equipment. The drill should include getting the breathing equipment, donning the breathing apparatus, and performing expected duties for a short period. A record shall be kept of all personnel drilled and the date of the drill. H₂S training records will be kept on location for all personnel.

Rig crews and service company personnel shall be made aware of the location of spare air bottles, resuscitation equipment, portable fire extinguishers, H₂S monitors and detectors. Knowledge of the location of the H₂S monitors and detectors are vital in determining as our gas location and the severity of the emergency conditions.

After any device has initially detected H₂S, all areas of poor ventilation shall be inspected periodically by means of a portable H₂S detector instrument. The buddy system will be utilized. (When an alarm sounds, personnel will don an SCBA, shut the well in, and proceed to SBA for roll call. The H₂S Technician or designee will mask up, with a buddy and will verify source of H₂S and report back to the on-site MRC Foreman.)

D. PROCEDURES PROGRAM

1. Drill Site

- a. The drilling rig will be located to allow prevailing winds to blow across the reserve pit.
- b. A Safe Briefing Area will be provided with a breathing air cascade trailer and or 30-minute SCBA's at the Primary Area. Personnel will assemble at the most up-wind station under alarm conditions, or when so ordered by the MRC Energy Co. representative, the Contractor representative, or

the Total Safety H₂S Safety Technician. Windsocks or streamers will be anchored to various strategic places on a pole about 10 feet high, so it is in easy view from the rig floor at all times.

- c. Warning signs will be posted on the perimeters. "No Smoking" signs will be posted by MRC Energy Co. as well.
- d. One multi-channel automatic H₂S monitor will be provided by Total Safety and the detector heads will be at the shale shaker, bell nipple, mud pits, rig floor, and quarter's area. The monitor will be located inside HSE or Company man trailer. Should the alarm be shut off to silence the sirens, the blinker light must continue to warn of H₂S presence. The Total Safety H₂S Safety Technician or designee will continuously monitor the detectors and will reactivate the alarm if H₂S concentrations increase to a dangerous level.
- e. A method of escape will be open at all times.
- f. If available, land line telephone service will be provided or cell phones provided. (Primary communications provided)
- g. A rig communication system will be provided, as needed.
- h. A gas trap, choke manifold, and degasser will be installed.
- i. A kill line, securely anchored and of ample strength, will be laid to the well-head from a safe location. This line is to be used only in an emergency.

General

- a. The MRC Energy Co. representative and/or the Contractor's Toolpusher will be available at all times. The drilling supervisor, while on duty, will have complete charge of the rig and location operations and will take whatever action is deemed necessary to insure personnel safety, to protect the well, and to prevent damage.
- b. A Mud Engineer will be on location at all times when drilling takes place at the depth H₂S may be expected. The mud engineer will be able to verify the presence or absence of H₂S.

III. CONDITIONS AND EMERGENCY PROCEDURES

A. DEFINITION OF OPERATIONAL "CONDITIONS"

CONDITION I	"POSSIBLE DANGER"
Warning Flags	Green
Alarms	No Alarm. Less than 10 ppm
Characterized By:	Drilling operations in zones that may contain hydrogen sulfide. This condition remains in effect unless H ₂ S is detected and it becomes necessary to go to Condition II.
General Action:	a. Be alert for a condition change b. Check all safety equipment for availability and proper functioning. c. Perform all drills for familiarization and proficiency.
CONDITION II	"MODERATE DANGER"
Warning Flags	Yellow
Alarms:	Actuates at 10 ppm. Continuous flashing light.
Characterized By:	Drilling operations in zones containing hydrogen sulfide. This condition will remain in effect until adding chemicals to the mud system neutralizes the hydrogen sulfide or it becomes necessary to go to Condition III.
General Action:	a. Be alert for a condition change b. WHEN DRILLING AHEAD - Driller and designated crewmember will don 30 min SCBA, shut-in the well and immediately proceed to the Safe Briefing Area. WHEN TRIPPING – Driller and two designated crewmembers will don 30 min SCBA, shut in the well and immediately proceed to the Safe Briefing Area. The Derrickman will

don a 5-minute escape pack, descend to the rig floor, don a 30-min SCBA (if necessary) and immediately proceed to the Safe Briefing Area.

- c. All In Scope Personnel will proceed directly to the appropriate Safe Briefing Area.
- d. Remain in safe briefing area, take roll call and wait for instructions
- e. Contact the Total H2S Technician if not on location.
- f. Personnel shall ensure that their breathing apparatus is properly fitted and operational before entering an H₂S contaminated area to provide assistance to anyone who may be injured or overcome by toxic gases.
- g. All Out of Scope Personnel will report to the appropriate Safe Briefing Area.

CONDITION III “EXTREME DANGER”

Warning Flags

Red

Alarms

Actuate at 15 ppm. Continuous Sirens and Flashing Lights

Characterized by:

Critical well operations which pose an immediate threat of H₂S exposure to on-site personnel and a potential threat to the public.

General Action:

- a. **WHEN DRILLING AHEAD -**
Driller and designated crewmember will don 30 min SCBA, shut-in the well and immediately proceed to the Safe Briefing Area.

WHEN TRIPPING – Driller and two designated crewmembers will don 30

- min SCBA, shut in the well and immediately proceed to the Safe Briefing Area. The Derrickman will don a 5-minute escape pack, descend to the rig floor, don a 30-min SCBA (if necessary) and immediately proceed to the Safe Briefing Area.
- b. All In Scope Personnel should don SCBA if nearby and immediately proceed to Safe Briefing Area. If SCBA is not nearby at time of alarm, DO NOT GO TOWARDS RIG AREA, but proceed directly to the Safe Briefing Area
 - c. All out of Scope Personnel shall evacuate the location.
 - d. Remain in the Safe Briefing Area, take roll call and wait for instructions.
 - e. Contact the Total H₂S Technician if not on location.
 - f. Personnel shall ensure that their breathing apparatus is properly fitted and operational before entering an H₂S contaminated area to provide assistance to anyone who may be injured or overcome by toxic gases. Use the buddy system.
 - g. Remain in safe briefing area, take roll call and wait for instructions.
 - h. A cascade breathing air systems shall be mobilized and utilized to conduct any additional on rig work required to correct the H₂S release condition.
 - i. If well is ignited do not assume area is safe. SO₂ is hazardous and not all H₂S will burn.

H₂S EMERGENCY PROCEDURES; IN SCOPE PERSONNEL

A. Day To Day Drilling Operations

1. Upon discovering a release of H₂S gas in the ambient air by warning alarms or in any other way **Do Not Panic**.
2. Hold your breath donning the nearest Self Contained Breathing Apparatus and rapidly move up or across-wind away from the areas where H₂S sensing devices are in place, to the closest available safe briefing area. Continue to use breathing apparatus until it has been determined that the exposure of H₂S gas in the ambient air no longer exists. **Do Not Panic!**
3. Utilize the "Buddy System", i.e.; select and pair up each person participating in the drilling of an H₂S well prior to an emergency situation.
4. Help anyone who is overcome or affected by the H₂S gas by taking him/her up-wind out of the contaminated area. (This should be done utilizing an SCBA and with a buddy.)
5. Take necessary steps to confirm the release of the H₂S gas into the ambient air.
 - When an H₂S alarm activates, two designated personnel using the buddy system, while wearing their self contained breathing apparatus, will determine by the read-out on the fixed monitor which sensing device has detected the release of the H₂S gas.
 - They will utilize the hand-held sniffer type device at the particular sensing point disclosed on the fixed monitor to corroborate the fact that H₂S gas has actually been released. This will rule out the possibility of a false alarm. This will be done with a buddy and under mask after reporting to the Safe Briefing Area for roll call and instructions by on-site MRC Foreman.
6. Refer to the Emergency Phone Numbers and call emergency personnel.
7. Take the necessary steps to suppress the release of H₂S gas into the ambient air. Comply with the MRC Energy Co. Representative to physically suppress the release of H₂S gas at the actual release point.

8. Check all of MRC Energy Co.'s monitoring devices and increase gas-monitoring activities with the portable hand-operated H₂S and gas detector units.

Do Not Panic!

The MRC Energy Co. representative will assess the situation and with assistance of the Contractor's Representative and Total Safety's H₂S Safety Technician or on site designee, will assign duties to each person to bring the situation under control.

B. RESPONSIBILITIES OF WELL-SITE PERSONNEL

In the event of a release of potentially hazardous amounts of H₂S, all personnel will immediately don their protective breathing apparatus, the well will be shut in and personnel will proceed upwind to the nearest designated safe briefing area for roll call and instructions by MRC Foreman. Consideration will be given to evacuating Out of Scope Personnel, as situation warrants.

1. MRC ENERGY CO.'S Well-site Representatives

- a. If MRC Energy Co.'s well-site representative is incapacitated or not on location, this responsibility will fall to the Toolpusher/Driller.
- b. Immediately upon assessing the situation, set this plan into Action by initiating the proper procedures to contain the gas and notify the appropriate people and agencies.
- c. Ensure that the alarm area indicated by the fixed H₂S Monitor is checked and verified with a portable H₂S detector. (Safety Technician if on location or MRC assigned designee with a buddy utilizing SCBA's)
- d. Consult Pusher/driller of remedial actions as needed.
- e. Ensure that non-essential personnel proceed to the safe briefing area.
- f. Ensure location entrance barricades are positioned. Keep the number of persons on location to a minimum during hazardous operations.

- g. Consult each contractor, Service Company and all others allowed to enter the site, that H₂S gas may be encountered and the potential hazards that may exist.
- h. Authorize the evacuation of local residents if H₂S threatens Their safety.
- i. Non essential personnel should be evacuated from location if Situation warrants.

2. Toolpusher

- a. Toolpusher/Driller will assume responsibilities of MRC Energy Co.'s well-site representative if that person is incapacitated or not on location.
- b. Ensure that the alarm area indicated by the fixed H₂S monitor is checked and verified with a portable H₂S gas detector. (Alarm area indicated by the monitor will be Checked by the H₂S Technician and a buddy, under mask.) This will be done after checking in and roll call at the Upwind Safe Briefing Area.
- c. Confer with MRC Energy Co.'s well-site representative or superintendent and direct remedial action to suppress the H₂S and control the well.
- d. Ensure that personnel at the safe briefing area are instructed on emergency actions required.
- e. Ensure that personnel at the drill floor area are instructed on emergency actions required.
- f. Ensure that all personnel observe the appropriate safety and emergency procedures.
- g. Ensure that all persons are accounted for and provided emergency assistance as necessary.

3. Mud Engineer

- a. Run a sulfide check on the flowline mud.
- b. Take steps to determine the source of the H₂S and suppress it. Lime and H₂S scavenger shall be added to the mud as necessary.

4. Total H₂S Safety Technician, if on location, or MRC Designee

- a. H₂S Safety Technician or designee don nearest SCBA and report to Safe Briefing Area for roll call, take a buddy masked up and check monitor and verify with a portable H₂S detector the alarm area indicated by the fixed H₂S monitor. Advise the Toolpusher/Driller and MRC Energy Co.'s well-site representative of findings. Record all findings.
- b. If H₂S is flared, check for sulfur dioxide (SO₂) near the flare as necessary. Take hourly readings at different perimeters, log readings and record on location.
- c. Ensure that personnel at the safe briefing area are instructed on emergency actions required.
- d. Ensure that the appropriate warning flags are displayed.
- e. Ensure that all personnel are in S.C.B.A. as necessary.
- f. Ensure that all persons are accounted for and provide emergency assistance as necessary.
- g. Be prepared to evacuate rig if order is issued.

5. General Personnel & Visitors

- a. All In Scope Personnel, if not specifically designated to shut the well in or control the well, shall proceed to the (upwind) safe briefing area. All Out of Scope Personnel shall immediately proceed to the appropriate (upwind) safe briefing area or evacuate the site as conditions warrant.

- b. During any emergency, use the "buddy" system to prevent anyone from entering or being left in a gas area alone, even wearing breathing apparatus.
- c. Provide assistance to anyone who may be injured or overcome by toxic gases. Personnel shall ensure that their breathing apparatus is properly fitted and operational before entering a potentially H₂S contaminated area.
- d. Remain in safe briefing area and wait for instructions.

C. INSTRUCTIONS FOR IGNITING THE WELL

1. The Toolpusher/Driller will confer with MRC Energy Co.'s well-site representative who will secure the approval of the "Texas Wells Delivery Manager, prior to igniting the well, if at all possible.

The Toolpusher/Driller will be responsible for igniting the well in the event of severe well control problems. This decision should be made only as a last resort in situations where it is clear that:

- a. Human life and property are endangered, or
- b. There is no hope of controlling the well under current conditions.

2. Once the decision has been made, the following procedures should be followed:

- a. Two people wearing self-contained breathing apparatus will be needed for the actual lighting of the well. They must first establish the flammable perimeter by using an explosimeter. This should be established at 30% to 40% of the lower flammable limits.
- b. After the flammable perimeter has been established and everyone removed from the area, the ignition team should select a site upwind of the well from which to ignite the well. This site should offer the maximum protection and have a clear path for retreat from the area.

- c. The ignition team should have safety belts and lifeline attached and manned before attempting ignition. If the leak is not ignited on the first attempt, move in 20 to 30 feet and fire again. Continue to monitor with the explosimeter and NEVER fire from an area with over 75% of the Lower Explosive Limit (LEL). If having trouble igniting the well, try firing 40 degrees to 90 degrees on either side of the well.
- d. If ignition is not possible due to the makeup of the gas, the toxic perimeter must be established and evacuation continued until the well is contained.
- e. All personnel must act only as directed by the person in charge of the operations.

NOTE: After the well is ignited, burning hydrogen sulfide (H_2S) will convert to sulfur dioxide (SO_2), which is also a highly toxic gas.

DO NOT ASSUME THE AREA IS SAFE AFTER THE WELL IS IGNITED

D. CORING PROCEDURES

Only essential personnel shall be on the rig floor. Ten (10) stands prior to retrieving core barrel; all personnel on drill floor and in derrick shall confirm self-Contained breathing apparatus available and ready for use.

A Total H₂S Technician will don a SCBA with a buddy assigned from the rig crew, and continuously monitor for H₂S at each connection. Any levels detected will require operations to be shut down and all involved personnel to don SCBAs. Precautions will remain in place until barrel is laid down.

All involved personnel will don SCBAs when removing the inner barrel from the outer barrel. SCBAs can be removed once the absence of H₂S is confirmed by the Total H₂S Technician.

Cores will be appropriately marked and sealed for transportation.

Normal Operations

1. Responsibilities of well-site personnel

a. Well-site Representative

1. Notify H₂S Technician of expected date to reach Contingency Plan implementation depth (Two (2) days prior to reaching suspected H₂S bearing zone) or prior to starting well work.
2. Ensure H₂S Safety Technician completes rig-up procedures prior to reaching Contingency Plan effective depth.
3. Restrict the number of personnel at the drilling rig or well site to a minimum while drilling, starting well work, testing or coring.
4. Ensure weekly H₂S drills/training are performed, if possible.

B. Toolpusher

1. Ensure that necessary H₂S safety equipment is provided on the rig, and that it is properly inspected and maintained.
2. Ensure that all personnel that work in the well area, are thoroughly trained in the use of H₂S safety equipment and periodic drills are held to maintain an adequate level of proficiency.

C. In Scope Personnel

1. Remain clean-shaven. Beards and long sideburns do not allow a proper facepiece seal.
2. Receive H₂S safety training on location, or confirm prior training by certification that is one year within date.
3. Familiarize yourself with the rig's Contingency Plan.
4. Inspect and practice putting on your breathing apparatus.

5. Know the location of the "safe briefing areas".
6. Keep yourself "wind conscious". Be prepared to quickly move upwind and away in the event of any emergency involving release of H₂S.

D. Total Safety H₂S Safety Technician or MRC Designee

1. Conduct training as necessary to ensure all personnel working in well area are familiar with the contingency procedures and the operation of emergency equipment.
2. Check all H₂S safety equipment to ensure that it is ready for emergency use:
 - Check pressure weekly for each shift on breathing apparatus (both 30-minute and hip-packs) to make sure they are charged to full volume.
 - Check pressure on cascade air bottles, if on location, to see that they are capable of recharging breathing apparatus.
 - Check oxygen resuscitator, if on location, to ensure that it is charged to full volume.
 - Check H₂S detectors weekly for each shift (fixed and portable), and explosimeter, to ensure they are working properly.
3. Provide a weekly report to MRC Energy Co.'s well-site representative documenting:
 - Calibrations performed on H₂S detectors.
 - Proper location and working order of H₂S safety equipment.
 - Attendance of all personnel, trained or retrained, and their company.
 - Weekly drills, if held and a list of personnel participating and summary of actions.

OUT OF SCOPE PERSONNEL

MRC Energy Co. policy will not require Out of Scope Personnel to be clean shaven, have processed medical questionnaires, fit testing, or have certified H2S Training.

SAFETY EQUIPMENT

All respirators will be designed, selected, used and maintained in conformance with ANSI Z88.2, American National Standard for respiratory protection.

Personal protective equipment must be provided and used. Those who are expected to use respiratory equipment in case of an emergency will be carefully instructed in the proper use and told why the equipment is being used. Careful attention will be given to the minute details in order to avoid possible misuse of the equipment during periods of extreme stress.

Self-contained breathing apparatus provides complete respiratory and eye protection in any concentration of toxic gases and under any condition of oxygen deficiency. The wearer is independent of the surrounding atmosphere because he/she is breathing with a system admitting no outside air. It consists of a full face mask, breathing tube, pressure demand regulator, air supply cylinder, and harness. Pure breathing air from the supply cylinder flows to the mask automatically through the pressure demand regulator which reduces the pressure to a breathing level. Upon inhalation, air flows into the mask at a rate precisely regulated to the user's demand. Upon exhalation, the flow to the mask stops and the exhaled breath passes through a valve in the face piece to the surrounding atmosphere. The apparatus includes an alarm & gauge which warns the wearer to leave the contaminated area for a new cylinder of air or cylinder refill.

The derrickman is provided with a full face piece unit attached to a 5- minute escape cylinder. He will also have his own self-contained 30-minute unit breathing apparatus located on the drilling floor. He will use the 5-minute unit to exit the derrick to the floor, donning the 30-minute unit located on the floor, if needed.

All respiratory protective equipment, when not in use, should be stored in a clean, cool, dry place, and out of direct sunlight to retard the deterioration of rubber parts. After each use, the mask assembly will be scrubbed with soap and water, rinsed thoroughly, and dried. Air cylinders can be recharged to a full condition from a cascade system.

Personnel in each crew will be trained in the proper techniques of bottle filling.

The primary piece of equipment to be utilized, should anyone be overcome by hydrogen sulfide, is the oxygen resuscitator, if on location.

When asphyxiation occurs, the victim must be moved to fresh air and immediately given artificial respiration. In order to assure readiness, the bottles of oxygen will be checked at regular intervals and an extra tank kept on hand.

Hand-operated pump-type detectors incorporating detector tubes will give more accurate readings of hydrogen sulfide. The pump-type draws air to be tested through the detector tube containing lead acetate-silica gel granules. Presence of hydrogen sulfide in the air sample is shown by the development of a dark brown stain on the granules, which is the

scale reading of the concentration of hydrogen sulfide. By changing the type of detector tube used, this detector may also be used for sulfur dioxide (SO₂) detection when hydrogen sulfide (H₂S) is being burned in the flare area.

Provisions must be made for the storage of all safety equipment as is evident from the foregoing discussion. All equipment must be stored in an available location so that anyone engaged in normal work situations is no more than "one breath away" from a mask.

V – TOXICITY OF VARIOUS GASES

Lethal Common Name ppm⁴	Chemical Formula	Specific Gravity¹	PEL (OSHA)²	STEL³
Hydrogen Cyanide 300	HCN	0.94	10	150
Hydrogen Sulfide 600	H ₂ S	1.18	20	Peak- 50ppm
Note: The ACGIH(7) recommends a TWA(6) value of 10ppm as the TLV(5) for H ₂ S and an STEL of 15ppm.				
Sulfur Dioxide 1000	SO ₂	2.21	2	5 ppm
Chlorine	CL ₂	2.45	1	
Carbon Monoxide 1000	CO	0.97	35	200/1 Hour
Carbon Dioxide 10%	CO ₂	1.52	5000	5%
Methane	CH ₄	0.55	90000	

¹ **Air = 1.0**

² **Permissible** - Concentration at which is believed that all workers may repeatedly be exposed, day after day, without adverse effect.

³ **STEL** - Short Term Exposure Limit. A 15-minute time weighted average.

⁴ **Lethal** - Concentration that will cause death with short-term exposure.

TLV – Threshold Limit Value; a concentration recommended by the American Conference of Governmental Industrial Hygienists (ACGIH)

TWA – Time Weighted Average; the average concentration of contaminant one can be exposed to over a given eight-hour period.

ACGIH – (American Conference of Governmental Industrial Hygienists) is an organization comprised of Occupational Health Professionals believed by many to be the top experts in the field of Industrial Hygiene. They are recognized as an expert resource by OSHA. The ACGIH releases a bi-annual publication "Threshold Limit Values and Biological Indices" that many safety professionals consider to be the authoritative document on airborne contaminants.

Reference: API RP-49, September 1974 - Reissued August 1978

VI. PROPERTIES OF GASES

A. CARBON DIOXIDE

1. Carbon Dioxide (CO₂) is usually considered inert and is commonly used to extinguish fires. It is 1.52 times heavier than air and will concentrate in low areas of still air. Humans cannot breathe air containing more than 10% CO₂ without losing conscience or becoming disorientation in a few minutes. Continued exposure to CO₂ after being affected will cause convulsions, coma, and respiratory failure.

2. The threshold limit of CO₂ is 5000 ppm. Short-term exposure to 50,000 ppm (5%) is reasonable. This gas is colorless, odorless, and can be tolerated in relatively high concentrations.

B. HYDROGEN SULFIDE

1. Hydrogen Sulfide (H₂S) is a colorless, transparent, flammable gas. It is heavier than air and, hence, may accumulate in low places.

2. Although the slightest presence of H₂S in the air is normally detectable by its characteristic "rotten egg" odor, it is dangerous to rely on the odor as a means of detecting excessive concentrations because the sense of smell is rapidly lost, allowing lethal concentrations to be accumulated without warning. The following table indicates the poisonous nature of H₂S.

CONCENTRATION			EFFECTS
% H ₂ S	PPM	GR/100 SCF ¹	
0.001	10	.65	Safe for 8 hours without respirator. Obvious and unpleasant odor.
0.0015	15	0.975	Safe for 15 minutes of exposure without respirator.
0.01	100	6.48	Kills smell in 3-15 minutes; may sting eyes and throat.
0.02	200	12.96	Kills smell quickly; stings eyes and throat.
0.05	500	32.96	Dizziness; breathing ceases in a few minutes; need prompt artificial respiration.
0.07	700	45.92	Rapid Unconsciousness; death will result if not rescued promptly.
0.1	1000	64.80	Instant unconsciousness, followed by death within minutes.

¹ Grains per 100 Cubic Feet

VII. Treatment Procedures for Hydrogen Sulfide Poisoning

- A. Remove the victim to fresh air.
- B. If breathing has ceased or is labored, begin resuscitation immediately.
 Note: This is the quickest and preferred method of clearing victim's lungs of contaminated air; however, under disaster conditions, it may not be practical to move the victim to fresh air. In such instances, where those rendering first aid must continue to wear masks, a resuscitator should be used.
- C. Apply resuscitator to help purge H₂S from the blood stream.
- D. Keep the victim at rest and prevent chilling.
- E. Get victim under physician's care as soon as possible.

C. SULPHUR DIOXIDE

1. Sulfur Dioxide (SO₂) is a colorless, non-flammable, transparent gas.
2. SO₂ is produced during the burning of H₂S. Although SO₂ is heavier than air, it can be picked up by a breeze and carried downwind at elevated temperatures. Since SO₂ is extremely irritating to the eyes and mucous membranes of the upper respiratory tract, it has exceptionally good warning powers in this respect. The following table indicates the toxic nature of SO₂:

CONCENTRATION		EFFECTS
% SO ₂	PPM	
0.0005	3 to 5	Pungent odor, normally a person can detect SO ₂ in this range.
0.0012	12	Throat irritation, coughing, constriction of the chest, tearing and smarting of eyes.
0.015	150	So irritating that it can only be endured for a few minutes.
.05	500	Causes a sense of suffocation, event with the

		first breath.
--	--	---------------

VIII. BREATHING AIR EQUIPMENT DRILLS FOR ON & OFF DUTY PERSONNEL

An H₂S Drill and Training Session must be given once a week to ALL on-duty personnel with off duty personnel. On-duty and Off-duty personnel will reverse roles on alternate drills.

An H₂S drill and training session must be given once a week to all off-duty personnel in coincidence with on-duty personnel reversing roles on alternate drills.

The purpose of this drill is to instruct the crews in the operation and use of breathing air and H₂S related emergency equipment and to allow the personnel to become acquainted with using the equipment under working conditions. The crews should be trained to put on the breathing air equipment within one minute when required or requested to do so.

The following procedure should be used for weekly drills. The MRC supervisor must be satisfied that the crews are proficient with the equipment.

1. All personnel should be informed that a drill will be held.
2. The Total H₂S Safety Technician or a designee assigned by the MRC Drilling Foreman should initiate the drill by signaling as he/she would if H₂S was detected.
3. Personnel should don their breathing apparatus.
4. Once the breathing air equipment is on, the H₂S Technician should check all personnel to insure proper operation.

A training and information session will be conducted after each drill to answer any H₂S related questions and to cover any gaps identified from one of the following topics:

- Condition II, and III alerts and steps to be taken by all personnel.
- The importance of wind direction when dealing with H₂S.
- Proper use and storage of all types of breathing equipment.
- Proper use and storage of oxygen resuscitators.
- Proper use and storage of H₂S detectors (Mini Checks or equivalent).
- The "buddy system" and the procedure for rescuing a person overcome by H₂S.
- Responsibilities and duties.
- Location of H₂S safety equipment.
- Other parts of the "H₂S Contingency Plan" that should be reviewed.

NOTE: A record of attendance must be kept for weekly drills and training sessions.

IX. HYDROGEN SULFIDE TRAINING CURRICULUM

(FOR EMPLOYERS, VISITORS, AND CONTRACTORS)

EACH PERSON WILL BE INFORMED ON THE RESTRICTIONS OF HAVING BEARDS AND CONTACT LENS. THEY WILL ALSO BE INFORMED OF THE AVAILABILITY OF SPECTACLE KITS.

AFTER THE H2S EQUIPMENT IS RIGGED UP, ALL IN SCOPE PERSONNEL WILL BE H2S TRAINED AND PUT THROUGH A DRILL. ANY DEFICIENCIES WILL BE CORRECTED.

Training Completion cards are good for one year and will indicate date of completion or expiration. Personnel previously trained on another facility and visiting, must attend a "supplemental briefing" on H2S equipment and procedures before beginning duty. Visitors who remain on the location more than 24 hours must receive full H2S training given all crew members. A "supplemental briefing" will include but not be limited to: Location of respirators, familiarization with safe briefing areas, alarms with instruction on responsibilities in the event of a release and hazards of H2S and (SO2, if applicable). A training and drill log will be kept.

Topics for full H2S training shall include the following equipment if on location, but not be limited to the following:

1. **Brief Introduction on H2S**
 - A. Slide or Computer presentation (If Available)
 - B. H2S material will be distributed
 - C. Re-emphasize the properties, toxicity, and hazards of H2S
 - D. Source of SO2 (if applicable)
2. **H2S Detection**
 - A. Description of H2S sensors
 - B. Description of warning system (how it works & it's location)
 - C. Actual location of H2S sensors
 - D. Instruction on use of pump type detector (Gastec)
 - E. Use of card detectors, ampoules, or dosimeters
 - F. Use of combustible gas detector
 - G. Other personnel detectors used
 - H. Alarm conditions I & II,
 - I. SO2 alarms (if applicable)

3. **H2S Protection**
 - A. Types of breathing apparatus provided (30-minute SCBA & 5-minute SCBA (with voice diaphragms for communication if supplied)
 - B. Principle of how breathing apparatus works
 - C. Demonstration on how to use breathing apparatus
 - D. Location of breathing apparatus
4. **Cascade System**
 - A. Description of cascade system
 - B. How system works
 - C. Cascade location of rig with reference to briefing areas
 - D. How to use cascade system (with 5-minute hose work line units & refill, if supplied)
 - E. Importance of wind direction and actual location of Windssocks
 - F. Purpose of compressor/function (if one is on site)
5. **H2S Rescue and First Aid**
 - A. Importance of wind direction
 - B. Safe briefing area
 - C. Buddy system
 - D. H2S symptoms
 - E. Methods of rescue
6. **Hands on Training**
 - A. Donning/familiarization of SCBA 30-minute unit
 - B. Donning/familiarization of SKADA 5- MIN. Packs
 - C. Familiarization of cascades
 - D. Use of O2 resuscitator
 - E. Alarm conditions - upwind briefing areas, etc...
 - F. Duties and responsibilities of all personnel
 - G. Procedures for evacuation
 - H. Search and Rescue teams
7. **Certification**
 - A. Testing on material covered

TOTAL SAFETY US INC., FIT TEST

X. EMPLOYEE INFORMATION

Employee Name: _____ Date: _____

Date of Employee Medical Evaluation: _____

Medical Status (circle): Unrestricted Limitations on Use Use Not
Authorized

RESPIRATOR INFORMATION

Respirator Type (Dustmask, SCBA, etc): _____

Brand: _____

Size: (circle): XS S M L XL

FIT TEST INFORMATION

Type of Fit Test Performed:

Quantitative

Porta Count
Fittester 3000

Fit Factor: _____

Fit Factor: _____

Qualitative

Irritant Smoke
Isoamyl Acetate (Banana Oil)
Saccharin
Bitrex

Passed / Failed

Passed / Failed

Passed / Failed

Passed / Failed

I hereby certify that this fittest was conducted in accordance with the OSHA Fit Testing Protocols found in Appendix A of 1910.134.

Fit Tester Name (Print): _____

MRC ENERGY CO.'S

Signature: _____ Date: _____

XI. H₂S SAFETY SERVICES

HYDROGEN SULFIDE SAFETY PACKAGE – Contained on location in Total Safety H₂S Equipment Trailer, unless otherwise noted:

RESPIRATORY SAFETY SYSTEMS

QTY	DESCRIPTION
------------	--------------------

- | | |
|----|---|
| 12 | 30-Minute Pressure Demand SCBA
(4-Primary Safe Briefing Area, 4-Secondary Safe Briefing Area, 4-floor with one of these for derrick man) |
| 9 | Hose Line 5-minute Work Unit w/Escape Cylinder (1 in derrick, 6 on drill floor, 1 in mud pit wt area, 1 in shaker area) |

The following shall be part of the package if requested by the MRC Foremen (at least one trailer with cascade system is required to be located in the MRC Magnolia asset for use as needed)

- | | |
|-----|---|
| 1 | Breathing air cascade of 10 bottles w/regulator |
| 2 | Refill lines to refill 30-minute units on location |
| 1 | 6-Man manifold that can be rigged up to work area on floor, if needed |
| 6 | 25 foot hose lines |
| 2 | 50 foot hose lines |
| 100 | Feet of hose line to rig cascade up to 12 man manifold on floor |
| 12 | 30-minute Self Contained Breathing apparatus |

DETECTION AND ALARM SAFETY SYSTEM

- | | |
|---|---|
| 1 | H ₂ S Fixed Monitor w/8Channels (Loc determined at rig up) suggested.
(Mud pit area, shaker area, bell nipple area, floor/driller area, & outside quarters) |
| 5 | H ₂ S Sensors |
| 3 | Explosion Proof Alarms (Light and Siren)
(1 on floor, 1 in work area, 1 in trailer area where quarters are located) |
| 2 | Personal H ₂ S monitors |
| 1 | Portable Tri-Gas Hand Held Meter (O ₂ , LEL, H ₂ S) |
| 1 | Sensidyne/Gastech Manual Pump Type Detector |
| 8 | Boxes H ₂ S Tubes Various Ranges |
| 2 | Boxes SO ₂ Tubes Various Ranges |
| 1 | Calibration Gas |
| 1 | Set Paper Work for Records: Training, Cal, Inspection, other |

ADDITIONAL SAFETY RELATED EQUIPMENT

QTY DESCRIPTION

2	Windsacks with Pole and Bracket
1	Set Well Condition Sign w/Green, Yellow, Red Flags
1	Primary Safe Briefing Area Sign
1	Secondary Safe Briefing Area Sign
6	Operating Condition Signs for Work Areas & Living Quarters

**TRAILER WITH BREATHING AIR CASCADE WILL
ALSO INCLUDE THE FOLLOWING:**

This equipment will be part of the H2S equipment stored in the trailer, when on location

1	First aid kit
1	Fire Blanket
1	Eye wash station
2	Safety Harness w/150' safety line

XII. EMERGENCY PHONE NUMBERS (Updated March 18, 2009)

EMERGENCY PHONE NUMBERS

MRC Energy Co. Emergency Phone #

MRC Energy Co. Permian Operations Phone-----

MRC Energy Co. Production

113 Daw Rd

Mansfield LA 71052

Title	Names	Phone	Cell
Operations Manager			
Operation Supt.			
Operations Supervisor			
Operations Supervisor			
Office Supervisor			
HSE			
Scheduler Planner			

Hydrogen Sulfide Safety Consultants

Total Safety W. Bender Blvd. Hobbs, NM	575-392-2973	After Hours 24 Hour Call Center Through Office Number
Tommy Throckmorton Operations Manager	575-392-2973	940-268-9614
Rodney Jourdan Sales Contact	575-392-2973	432-349-3928

MRC Energy Co. MEDICAL RESPONSE PLAN AND IT'S MEDICAL PROTOCOLS WILL BE FOLLOWED

MEDICAL COORDINATOR # -----

Emergency Numbers & Directions

Hospitals (911)

Artesia General Hospital 702 N. 13th St. Artesia, NM 88210	Main Phone Number	575-748-3333
Nor-Lea General Hospital 1600 N. Main Ave. Lovington, NM 88260	Main Phone Number	575-396-6611
Lea Regional Medical Center 5419 N. Lovington Hwy Hobbs, NM 88240	Main Phone Number	575-492-5260
Carlsbad General Hospital 2430 W. Pierce St. Carlsbad, NM	Main Phone Number	575-887-4100
Lovelace Regional Hospital 117 E. 19th St Roswell, NM 88201	Main Phone Number	575-627-7000
Winkler Co. Memorial Hospital 821 Jeffee Dr. Kermit, Texas 79745	Main Phone Number	432-586-8299
Reeves County Hospital 2323 Texas St. Pecos, Texas 79772	Main Phone Number	432-447-3551

State Police (911)

Texas DPS Loving co. 225 N.Pecos Mentone, Texas 79754	Office Number	432-377-2411
Texas DPS Winkler Co. 100 E Winkler Kermit, Texas 79745	Office Number	432-586-3465
Texas DPS Pecos Co. 148 N I-20 Frontage RD Pecos, Texas 79772	Office Number	432-447-3532
New Mexico State Police 3300 W. Main St Artesia, NM	Office Number	575-748-9718
New Mexico State Police 304 N. Canyon St Carlsbad, NM 88220	Office Number	575-885-3137
New Mexico State Police 5100 Jack Gomez Blvd. Hobbs, NM 88240	Office Number	575-392-5588

Local Law Enforcement (911) (Sheriff)

Reeves Co. Sheriff 500 N. Oak ST Pecos, Texas 79722	Office Number	432-445-4901
Winkler Co. Sheriff 1300 Bellaire St. Kermit, Texas 79745	Office Number	432-586-3461
Loving Co. Sheriff Courthouse Mentone, Texas	Office Number	432-377-2411
Lea Co. Sheriff 1417 S. Commercial St. Lovington, NM 88260	Office Number	
Eddy Co. Sheriff 305 N 7th St. Artesia, NM 88210	Office Number	575-766-9888
Eddy Co. Sheriff 305 N 7th St. Carlsbad, NM 88220	Office Number	575-746-9888

Federal & State Agencies

OSHA Lubbock Area Office 1205 Texas Av. Room 806 Lubbock, Texas 79401	Main Number	806-472-7681 EXT 7685
New Mexico Environment Department 400 N Pennsylvania Roswell, NM 88201	Joe Fresquez	575-623-3935
Texas Railroad Commission Midland, Texas	Main Number	844-773-0305
BLM Carlsbad, NM Field Office 620 E. Green ST Carlsbad, NM 88220	Main Number	575-234-5972
BLM Hobbs Field Station 414 W. Taylor Rd. Hobbs, NM 88240	Main Number	575-393-3612
BLM Roswell District Office 2909 W. Second St. Roswell, NM 88201	Main Number	575-627-0272
TECQ Texas Commission on Environmental Quality	Main Number	800-832-8224
New Mexico OCD		
U.S. Environmental Protection Agency Region 6 Texas/New Mexico	Main Number	214-655-2222
National Response Center Toxic Chemicals & Oil Spills	Main Number	800-424-8802

Rig Company

XIII. EVACUATION OF THE GENERAL PUBLIC







The procedure to be used in alerting nearby persons in the event of any occurrence that could pose a threat to life or property will be arranged and completed with public officials in detail, prior to drilling into the hydrogen sulfide formations.

In the event of an actual emergency, the following steps will be immediately taken:

1. The MRC Energy Co.'s representative will dispatch sufficient personnel to immediately warn each resident and transients down-wind within radius of exposure from the well site. Then warn all residence in the radius of exposure. Additional evacuation zones may be necessary as the situation warrants.
2. The MRC Energy Co.'s representative will immediately notify proper authorities, including the Sheriff's Office, Highway Patrol, and any other public officials as described above and will enlist their assistance in warning residents and transients in the calculated radius of exposure.
3. The MRC Energy Co.'s representative will dispatch sufficient personnel to divert traffic in the vicinity away from the potentially dangerous area. A guard to the entrance of the well site will be posted to monitor essential and non essential traffic.
4. General:
 - A. The area included within the radius of exposure is considered to be the zone of maximum potential hazard from a hydrogen sulfide gas escape. Immediate evacuation of public areas, in accordance with the provisions of this contingency plan, is imperative. When it is determined that conditions exist which create an additional area (beyond the initial zone of maximum potential hazard) vulnerable to possible hazard, public areas in the additional hazardous area will be evacuated in accordance with the contingency plan.
 - B. In the event of a disaster, after the public areas have been evacuated and traffic stopped, it is expected that local civil authorities will have arrived and within a few hours will have assumed direction of and control of the public, including all public areas. MRC Energy Co. will cooperate with these authorities to the fullest extent and will exert every effort by careful advice to such authorities to prevent panic or rumors.
 - C. MRC Energy Co. will dispatch appropriate management personnel at the disaster site as soon as possible. The company's personnel

will cooperate with and provide such information to civil authorities as they might require.

- D. One of the products of the combustion of hydrogen sulfide is sulfur dioxide (SO_2). Under certain conditions this gas may be equally as dangerous as H_2S . A pump type detector device, which determines the percent of SO_2 in air through concentrations in ppm, will be available. Although normal air movement is sufficient to dissipate this material to safe levels, the SO_2 detector should be utilized to check concentrations in the proximity of the well once every hour, or as necessary and the situation warrants. Also, if any low areas are suspected of having high concentrations, personnel should be made aware of these areas, and steps should be taken to determine whether or not these low areas are hazardous.

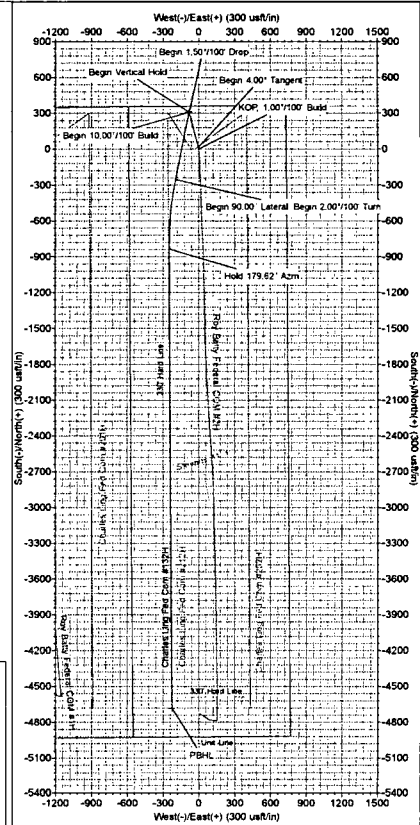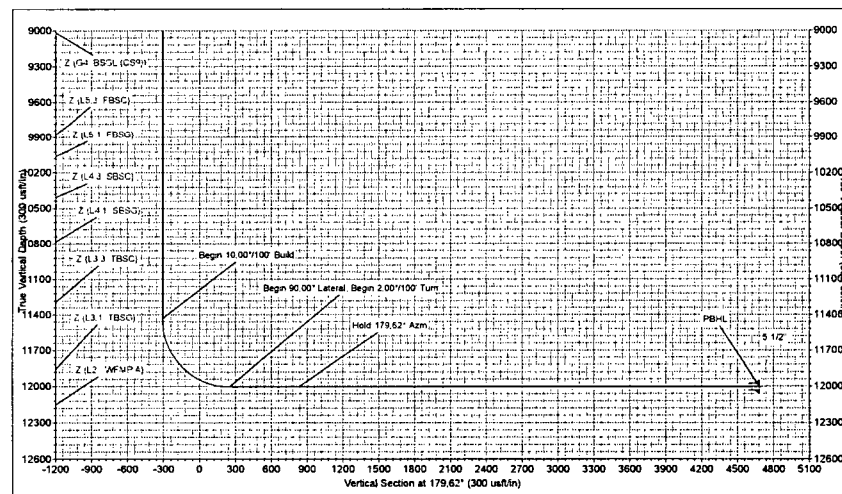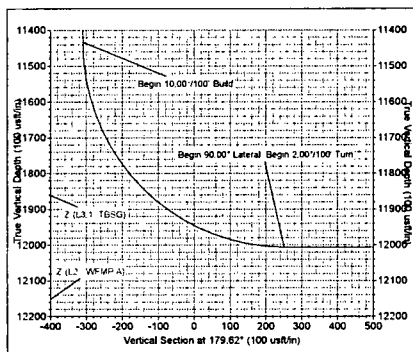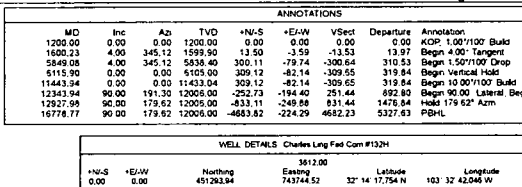**MS** *Directional*

The customer should only rely on this document after independently verifying all paths, targets, coordinates, leases and hard line representation. Any decisions made in reliance on this or any other information supplied by M/S Directional are at the sole risk and responsibility of the customer. M/S Directional is not responsible for the accuracy of this schematic or the information contained herein.



Matador Resources

Lea County, New Mexico (NAD 27)

Charles Ling Fed Com

Charles Ling Fed Com #132H

Wellbore #1

Plan: Design #1

Standard Planning Report

01 May, 2018





MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Company:	Matador Resources	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Lea County, New Mexico (NAD 27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Well	Charles Ling Fed Com #132H				
Well Position	+N/-S	11.68 usft	Northing:	451,293.94 usft	Latitude: 32° 14' 17.754 N
	+E/-W	1,319.46 usft	Easting:	743,744.52 usft	Longitude: 103° 32' 42.046 W
Position Uncertainty	0.00 usft		Wellhead Elevation:	Ground Level: 3,612.00 usft	

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2018	5/1/2018	6.92	60.03	47,900

Design	Design #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.62

Plan Survey Tool Program	Date: 5/1/2018			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	16,778.77	Design #1 (Wellbore #1)	MWD
				OWSG MWD - Standard

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,600.23	4.00	345.12	1,599.90	13.50	-3.59	1.00	1.00	0.00	345.12	
5,849.08	4.00	345.12	5,838.40	300.11	-79.74	0.00	0.00	0.00	0.00	
6,115.90	0.00	0.00	6,105.00	309.12	-82.14	1.50	-1.50	0.00	180.00	VP - Charles Ling F
11,443.94	0.00	0.00	11,433.04	309.12	-82.14	0.00	0.00	0.00	0.00	
12,343.94	90.00	191.30	12,006.00	-252.73	-194.40	10.00	10.00	0.00	191.30	
12,927.98	90.00	179.62	12,006.00	-833.11	-249.88	2.00	0.00	-2.00	-90.00	
16,778.77	90.00	179.62	12,006.00	-4,683.82	-224.29	0.00	0.00	0.00	0.00	PBHL - Charles Lin



MS Directional Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Company:	Matador Resources	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, 1.00°/100' Build									
1,300.00	1.00	345.12	1,299.99	0.84	-0.22	-0.84	1.00	1.00	0.00
1,320.51	1.21	345.12	1,320.50	1.22	-0.33	-1.23	1.00	1.00	0.00
Z (Rustler)									
1,350.00	1.50	345.12	1,349.98	1.90	-0.50	-1.90	1.00	1.00	0.00
13 3/8"									
1,400.00	2.00	345.12	1,399.96	3.37	-0.90	-3.38	1.00	1.00	0.00
1,500.00	3.00	345.12	1,499.86	7.59	-2.02	-7.60	1.00	1.00	0.00
1,600.23	4.00	345.12	1,599.90	13.50	-3.59	-13.53	1.00	1.00	0.00
Begin 4.00° Tangent									
1,700.00	4.00	345.12	1,699.43	20.23	-5.38	-20.27	0.00	0.00	0.00
1,800.00	4.00	345.12	1,799.19	26.98	-7.17	-27.03	0.00	0.00	0.00
1,851.44	4.00	345.12	1,850.50	30.45	-8.09	-30.50	0.00	0.00	0.00
Z (Salado) (Top Salt)									
1,900.00	4.00	345.12	1,898.94	33.73	-8.96	-33.78	0.00	0.00	0.00
2,000.00	4.00	345.12	1,998.70	40.47	-10.75	-40.54	0.00	0.00	0.00
2,100.00	4.00	345.12	2,098.46	47.22	-12.55	-47.30	0.00	0.00	0.00
2,200.00	4.00	345.12	2,198.21	53.96	-14.34	-54.06	0.00	0.00	0.00
2,300.00	4.00	345.12	2,297.97	60.71	-16.13	-60.81	0.00	0.00	0.00
2,400.00	4.00	345.12	2,397.72	67.45	-17.92	-67.57	0.00	0.00	0.00
2,500.00	4.00	345.12	2,497.48	74.20	-19.72	-74.33	0.00	0.00	0.00
2,600.00	4.00	345.12	2,597.24	80.94	-21.51	-81.09	0.00	0.00	0.00
2,700.00	4.00	345.12	2,696.99	87.69	-23.30	-87.84	0.00	0.00	0.00
2,800.00	4.00	345.12	2,796.75	94.44	-25.09	-94.60	0.00	0.00	0.00
2,900.00	4.00	345.12	2,896.50	101.18	-26.89	-101.36	0.00	0.00	0.00
3,000.00	4.00	345.12	2,996.26	107.93	-28.68	-108.11	0.00	0.00	0.00
3,100.00	4.00	345.12	3,096.02	114.67	-30.47	-114.87	0.00	0.00	0.00
3,200.00	4.00	345.12	3,195.77	121.42	-32.26	-121.63	0.00	0.00	0.00
3,300.00	4.00	345.12	3,295.53	128.16	-34.05	-128.39	0.00	0.00	0.00
3,400.00	4.00	345.12	3,395.29	134.91	-35.85	-135.14	0.00	0.00	0.00
3,500.00	4.00	345.12	3,495.04	141.65	-37.64	-141.90	0.00	0.00	0.00
3,600.00	4.00	345.12	3,594.80	148.40	-39.43	-148.66	0.00	0.00	0.00
3,700.00	4.00	345.12	3,694.55	155.15	-41.22	-155.42	0.00	0.00	0.00
3,746.06	4.00	345.12	3,740.50	158.25	-42.05	-158.53	0.00	0.00	0.00
Z (Castile (T))									
3,800.00	4.00	345.12	3,794.31	161.89	-43.02	-162.17	0.00	0.00	0.00
3,900.00	4.00	345.12	3,894.07	168.64	-44.81	-168.93	0.00	0.00	0.00
4,000.00	4.00	345.12	3,993.82	175.38	-46.60	-175.69	0.00	0.00	0.00
4,100.00	4.00	345.12	4,093.58	182.13	-48.39	-182.45	0.00	0.00	0.00
4,200.00	4.00	345.12	4,193.33	188.87	-50.19	-189.20	0.00	0.00	0.00



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Company:	Matador Resources	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,300.00	4.00	345.12	4,293.09	195.62	-51.98	-195.96	0.00	0.00	0.00
4,400.00	4.00	345.12	4,392.85	202.37	-53.77	-202.72	0.00	0.00	0.00
4,500.00	4.00	345.12	4,492.60	209.11	-55.56	-209.47	0.00	0.00	0.00
4,600.00	4.00	345.12	4,592.36	215.86	-57.36	-216.23	0.00	0.00	0.00
4,700.00	4.00	345.12	4,692.12	222.60	-59.15	-222.99	0.00	0.00	0.00
4,800.00	4.00	345.12	4,791.87	229.35	-60.94	-229.75	0.00	0.00	0.00
4,900.00	4.00	345.12	4,891.63	236.09	-62.73	-236.50	0.00	0.00	0.00
5,000.00	4.00	345.12	4,991.38	242.84	-64.53	-243.26	0.00	0.00	0.00
5,100.00	4.00	345.12	5,091.14	249.58	-66.32	-250.02	0.00	0.00	0.00
5,200.00	4.00	345.12	5,190.90	256.33	-68.11	-256.78	0.00	0.00	0.00
5,224.66	4.00	345.12	5,215.50	257.99	-68.55	-258.44	0.00	0.00	0.00
Z (G30:CS14-CSB) (Base Salt)									
5,267.77	4.00	345.12	5,258.50	260.90	-69.32	-261.36	0.00	0.00	0.00
Z (G26: Bell Cyn.)									
5,300.00	4.00	345.12	5,290.65	263.08	-69.90	-263.53	0.00	0.00	0.00
9 5/8"									
5,400.00	4.00	345.12	5,390.41	269.82	-71.69	-270.29	0.00	0.00	0.00
5,500.00	4.00	345.12	5,490.16	276.57	-73.49	-277.05	0.00	0.00	0.00
5,600.00	4.00	345.12	5,589.92	283.31	-75.28	-283.80	0.00	0.00	0.00
5,700.00	4.00	345.12	5,689.68	290.06	-77.07	-290.56	0.00	0.00	0.00
5,800.00	4.00	345.12	5,789.43	296.80	-78.86	-297.32	0.00	0.00	0.00
5,849.08	4.00	345.12	5,838.40	300.11	-79.74	-300.64	0.00	0.00	0.00
Begin 1.50°/100' Drop									
5,900.00	3.24	345.12	5,889.21	303.22	-80.57	-303.75	1.50	-1.50	0.00
6,000.00	1.74	345.12	5,989.11	307.42	-81.68	-307.95	1.50	-1.50	0.00
6,100.00	0.24	345.12	6,089.10	309.09	-82.13	-309.62	1.50	-1.50	0.00
6,115.90	0.00	0.00	6,105.00	309.12	-82.14	-309.65	1.50	-1.50	0.00
Begin Vertical Hold - VP - Charles Ling Fed Com #132H									
6,200.00	0.00	0.00	6,189.10	309.12	-82.14	-309.65	0.00	0.00	0.00
6,300.00	0.00	0.00	6,289.10	309.12	-82.14	-309.65	0.00	0.00	0.00
6,310.40	0.00	0.00	6,299.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (G13: Cherry Cyn.)									
6,400.00	0.00	0.00	6,389.10	309.12	-82.14	-309.65	0.00	0.00	0.00
6,500.00	0.00	0.00	6,489.10	309.12	-82.14	-309.65	0.00	0.00	0.00
6,600.00	0.00	0.00	6,589.10	309.12	-82.14	-309.65	0.00	0.00	0.00
6,700.00	0.00	0.00	6,689.10	309.12	-82.14	-309.65	0.00	0.00	0.00
6,800.00	0.00	0.00	6,789.10	309.12	-82.14	-309.65	0.00	0.00	0.00
6,900.00	0.00	0.00	6,889.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,000.00	0.00	0.00	6,989.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,100.00	0.00	0.00	7,089.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,200.00	0.00	0.00	7,189.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,300.00	0.00	0.00	7,289.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,400.00	0.00	0.00	7,389.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,500.00	0.00	0.00	7,489.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,504.40	0.00	0.00	7,493.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (G7: Brushy Cyn.) Antelope Ridge									
7,600.00	0.00	0.00	7,589.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,700.00	0.00	0.00	7,689.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,800.00	0.00	0.00	7,789.10	309.12	-82.14	-309.65	0.00	0.00	0.00
7,900.00	0.00	0.00	7,889.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,000.00	0.00	0.00	7,989.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,100.00	0.00	0.00	8,089.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,200.00	0.00	0.00	8,189.10	309.12	-82.14	-309.65	0.00	0.00	0.00



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Company:	Matador Resources	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,300.00	0.00	0.00	8,289.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,400.00	0.00	0.00	8,389.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,500.00	0.00	0.00	8,489.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,600.00	0.00	0.00	8,589.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,700.00	0.00	0.00	8,689.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,800.00	0.00	0.00	8,789.10	309.12	-82.14	-309.65	0.00	0.00	0.00
8,900.00	0.00	0.00	8,889.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,000.00	0.00	0.00	8,989.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,027.40	0.00	0.00	9,016.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (G4: BSGL (CS9))									
9,100.00	0.00	0.00	9,089.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,200.00	0.00	0.00	9,189.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,300.00	0.00	0.00	9,289.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,400.00	0.00	0.00	9,389.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,500.00	0.00	0.00	9,489.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,600.00	0.00	0.00	9,589.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,700.00	0.00	0.00	9,689.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,800.00	0.00	0.00	9,789.10	309.12	-82.14	-309.65	0.00	0.00	0.00
9,891.40	0.00	0.00	9,880.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (L5.3: FBSC)									
9,900.00	0.00	0.00	9,889.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,000.00	0.00	0.00	9,989.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,069.40	0.00	0.00	10,058.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (L5.1: FBSC)									
10,100.00	0.00	0.00	10,089.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,200.00	0.00	0.00	10,189.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,300.00	0.00	0.00	10,289.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,400.00	0.00	0.00	10,389.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,421.40	0.00	0.00	10,410.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (L4.3: SBSC)									
10,500.00	0.00	0.00	10,489.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,600.00	0.00	0.00	10,589.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,700.00	0.00	0.00	10,689.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,794.40	0.00	0.00	10,783.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (L4.1: SBSG)									
10,800.00	0.00	0.00	10,789.10	309.12	-82.14	-309.65	0.00	0.00	0.00
10,900.00	0.00	0.00	10,889.10	309.12	-82.14	-309.65	0.00	0.00	0.00
11,000.00	0.00	0.00	10,989.10	309.12	-82.14	-309.65	0.00	0.00	0.00
11,100.00	0.00	0.00	11,089.10	309.12	-82.14	-309.65	0.00	0.00	0.00
11,200.00	0.00	0.00	11,189.10	309.12	-82.14	-309.65	0.00	0.00	0.00
11,300.00	0.00	0.00	11,289.10	309.12	-82.14	-309.65	0.00	0.00	0.00
11,302.40	0.00	0.00	11,291.50	309.12	-82.14	-309.65	0.00	0.00	0.00
Z (L3.3: TBSC)									
11,400.00	0.00	0.00	11,389.10	309.12	-82.14	-309.65	0.00	0.00	0.00
11,443.94	0.00	0.00	11,433.04	309.12	-82.14	-309.65	0.00	0.00	0.00
Begin 10.00°/100' Build									
11,450.00	0.61	191.30	11,439.10	309.09	-82.14	-309.62	10.00	10.00	0.00
11,500.00	5.61	191.30	11,489.01	306.43	-82.67	-306.97	10.00	10.00	0.00
11,550.00	10.61	191.30	11,538.49	299.52	-84.05	-300.07	10.00	10.00	0.00
11,600.00	15.61	191.30	11,587.17	288.41	-86.27	-288.97	10.00	10.00	0.00
11,650.00	20.61	191.30	11,634.68	273.17	-89.32	-273.76	10.00	10.00	0.00
11,700.00	25.61	191.30	11,680.66	253.94	-93.16	-254.55	10.00	10.00	0.00
11,750.00	30.61	191.30	11,724.75	230.85	-97.78	-231.49	10.00	10.00	0.00



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Company:	Matador Resources	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,800.00	35.61	191.30	11,766.62	204.08	-103.13	-204.76	10.00	10.00	0.00
11,850.00	40.61	191.30	11,805.95	173.83	-109.17	-174.55	10.00	10.00	0.00
11,900.00	45.61	191.30	11,842.44	140.33	-115.86	-141.10	10.00	10.00	0.00
11,926.45	48.25	191.30	11,860.50	121.39	-119.65	-122.18	10.00	10.00	0.00
Z (L3.1: TBSG)									
11,950.00	50.61	191.30	11,875.82	103.85	-123.15	-104.66	10.00	10.00	0.00
12,000.00	55.61	191.30	11,905.83	64.65	-130.99	-65.52	10.00	10.00	0.00
12,050.00	60.61	191.30	11,932.24	23.03	-139.30	-23.96	10.00	10.00	0.00
12,100.00	65.61	191.30	11,954.85	-20.68	-148.04	19.70	10.00	10.00	0.00
12,150.00	70.61	191.30	11,973.49	-66.16	-157.12	65.12	10.00	10.00	0.00
12,200.00	75.61	191.30	11,988.01	-113.06	-166.50	111.95	10.00	10.00	0.00
12,250.00	80.61	191.30	11,998.31	-161.02	-176.08	159.85	10.00	10.00	0.00
12,300.00	85.61	191.30	12,004.31	-209.68	-185.80	208.45	10.00	10.00	0.00
12,343.94	90.00	191.30	12,006.00	-252.73	-194.40	251.44	10.00	10.00	0.00
Begin 90.00° Lateral; Begin 2.00°/100° Turn									
12,400.00	90.00	190.18	12,006.00	-307.81	-204.85	306.44	2.00	0.00	-2.00
12,500.00	90.00	188.18	12,006.00	-406.52	-220.80	405.05	2.00	0.00	-2.00
12,600.00	90.00	186.18	12,006.00	-505.73	-233.30	504.17	2.00	0.00	-2.00
12,700.00	90.00	184.18	12,006.00	-605.32	-242.32	603.70	2.00	0.00	-2.00
12,800.00	90.00	182.18	12,006.00	-705.16	-247.87	703.50	2.00	0.00	-2.00
12,900.00	90.00	180.18	12,006.00	-805.13	-249.93	803.46	2.00	0.00	-2.00
12,927.98	90.00	179.62	12,006.00	-833.11	-249.88	831.44	2.00	0.00	-2.00
Hold 179.62° Azm									
13,000.00	90.00	179.62	12,006.00	-905.13	-249.40	903.46	0.00	0.00	0.00
13,100.00	90.00	179.62	12,006.00	-1,005.13	-248.73	1,003.46	0.00	0.00	0.00
13,200.00	90.00	179.62	12,006.00	-1,105.13	-248.07	1,103.46	0.00	0.00	0.00
13,300.00	90.00	179.62	12,006.00	-1,205.13	-247.40	1,203.46	0.00	0.00	0.00
13,400.00	90.00	179.62	12,006.00	-1,305.12	-246.74	1,303.46	0.00	0.00	0.00
13,500.00	90.00	179.62	12,006.00	-1,405.12	-246.08	1,403.46	0.00	0.00	0.00
13,600.00	90.00	179.62	12,006.00	-1,505.12	-245.41	1,503.46	0.00	0.00	0.00
13,700.00	90.00	179.62	12,006.00	-1,605.12	-244.75	1,603.46	0.00	0.00	0.00
13,800.00	90.00	179.62	12,006.00	-1,705.11	-244.08	1,703.46	0.00	0.00	0.00
13,900.00	90.00	179.62	12,006.00	-1,805.11	-243.42	1,803.46	0.00	0.00	0.00
14,000.00	90.00	179.62	12,006.00	-1,905.11	-242.75	1,903.46	0.00	0.00	0.00
14,100.00	90.00	179.62	12,006.00	-2,005.11	-242.09	2,003.46	0.00	0.00	0.00
14,200.00	90.00	179.62	12,006.00	-2,105.11	-241.42	2,103.46	0.00	0.00	0.00
14,300.00	90.00	179.62	12,006.00	-2,205.10	-240.76	2,203.46	0.00	0.00	0.00
14,400.00	90.00	179.62	12,006.00	-2,305.10	-240.10	2,303.46	0.00	0.00	0.00
14,500.00	90.00	179.62	12,006.00	-2,405.10	-239.43	2,403.46	0.00	0.00	0.00
14,600.00	90.00	179.62	12,006.00	-2,505.10	-238.77	2,503.46	0.00	0.00	0.00
14,700.00	90.00	179.62	12,006.00	-2,605.09	-238.10	2,603.46	0.00	0.00	0.00
14,800.00	90.00	179.62	12,006.00	-2,705.09	-237.44	2,703.46	0.00	0.00	0.00
14,900.00	90.00	179.62	12,006.00	-2,805.09	-236.77	2,803.46	0.00	0.00	0.00
15,000.00	90.00	179.62	12,006.00	-2,905.09	-236.11	2,903.46	0.00	0.00	0.00
15,100.00	90.00	179.62	12,006.00	-3,005.09	-235.45	3,003.46	0.00	0.00	0.00
15,200.00	90.00	179.62	12,006.00	-3,105.08	-234.78	3,103.46	0.00	0.00	0.00
15,300.00	90.00	179.62	12,006.00	-3,205.08	-234.12	3,203.46	0.00	0.00	0.00
15,400.00	90.00	179.62	12,006.00	-3,305.08	-233.45	3,303.46	0.00	0.00	0.00
15,500.00	90.00	179.62	12,006.00	-3,405.08	-232.79	3,403.46	0.00	0.00	0.00
15,600.00	90.00	179.62	12,006.00	-3,505.07	-232.12	3,503.46	0.00	0.00	0.00
15,700.00	90.00	179.62	12,006.00	-3,605.07	-231.46	3,603.46	0.00	0.00	0.00
15,800.00	90.00	179.62	12,006.00	-3,705.07	-230.79	3,703.46	0.00	0.00	0.00
15,900.00	90.00	179.62	12,006.00	-3,805.07	-230.13	3,803.46	0.00	0.00	0.00



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Company:	Matador Resources	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,000.00	90.00	179.62	12,006.00	-3,905.07	-229.47	3,903.46	0.00	0.00	0.00
16,100.00	90.00	179.62	12,006.00	-4,005.06	-228.80	4,003.46	0.00	0.00	0.00
16,200.00	90.00	179.62	12,006.00	-4,105.06	-228.14	4,103.46	0.00	0.00	0.00
16,300.00	90.00	179.62	12,006.00	-4,205.06	-227.47	4,203.46	0.00	0.00	0.00
16,400.00	90.00	179.62	12,006.00	-4,305.06	-226.81	4,303.46	0.00	0.00	0.00
16,500.00	90.00	179.62	12,006.00	-4,405.06	-226.14	4,403.46	0.00	0.00	0.00
16,600.00	90.00	179.62	12,006.00	-4,505.05	-225.48	4,503.46	0.00	0.00	0.00
16,700.00	90.00	179.62	12,006.00	-4,605.05	-224.81	4,603.46	0.00	0.00	0.00
16,778.77	90.00	179.62	12,006.00	-4,683.82	-224.29	4,682.23	0.00	0.00	0.00
PBHL - 5 1/2" - PBHL - Charles Ling Fed Com #132H									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
VP - Charles Ling Fec	0.00	0.00	6,105.00	309.12	-82.14	451,603.06	743,662.38	32° 14' 20.819 N	103° 32' 42.975 W
- plan hits target center									
- Point									
PBHL - Charles Ling f	0.00	0.00	12,006.00	-4,683.82	-224.29	446,610.12	743,520.23	32° 13' 31.422 N	103° 32' 45.057 W
- plan hits target center									
- Point									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")	
1,350.00	1,349.98	13 3/8"	13-3/8	17-1/2	
5,300.00	5,290.65	9 5/8"	9-5/8	12-1/4	
16,778.77	12,006.00	5 1/2"	5-1/2	6	



MS Directional Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Company:	Matador Resources	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,320.51	1,320.50	Z (Rustler)		0.00	179.62
1,851.44	1,850.50	Z (Salado) (Top Salt)		0.00	179.62
3,746.06	3,740.50	Z (Castile (T))		0.00	179.62
5,224.66	5,215.50	Z (G30:CS14-CSB) (Base Salt)		0.00	179.62
5,267.77	5,258.50	Z (G26: Bell Cyn.)		0.00	179.62
6,310.40	6,299.50	Z (G13: Cherry Cyn.)		0.00	179.62
7,504.40	7,493.50	Z (G7: Brushy Cyn.) Antelope Ridge		0.00	179.62
9,027.40	9,016.50	Z (G4: BSGI (CS9))		0.00	179.62
9,891.40	9,880.50	Z (L5.3: FBSC)		0.00	179.62
10,069.40	10,058.50	Z (L5.1: FBSC)		0.00	179.62
10,421.40	10,410.50	Z (L4.3: SBSC)		0.00	179.62
10,794.40	10,783.50	Z (L4.1: SBSC)		0.00	179.62
11,302.40	11,291.50	Z (L3.3: TBSC)		0.00	179.62
11,926.45	11,860.50	Z (L3.1: TBSC)		0.00	179.62

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
1,200.00	1,200.00	0.00	0.00	KOP, 1.00°/100' Build	
1,600.23	1,599.90	13.50	-3.59	Begin 4.00° Tangent	
5,849.08	5,838.40	300.11	-79.74	Begin 1.50°/100' Drop	
6,115.90	6,105.00	309.12	-82.14	Begin Vertical Hold	
11,443.94	11,433.04	309.12	-82.14	Begin 10.00°/100' Build	
12,343.94	12,006.00	-252.73	-194.40	Begin 90.00° Lateral; Begin 2.00°/100' Turn	
12,927.98	12,006.00	-833.11	-249.88	Hold 179.62° Azm	
16,778.77	12,006.00	-4,683.82	-224.29	PBHL	



Matador Resources

Lea County, New Mexico (NAD 27)

Charles Ling Fed Com

Charles Ling Fed Com #132H

Wellbore #1

Design #1

Anticollision Report

01 May, 2018





MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Reference	Design #1
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	MD + Stations Interval 100.00usft
Depth Range:	Unlimited
Results Limited by:	Maximum center-center distance of 10,000.00 u
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program		Date 5/1/2018		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	16,778.77	Design #1 (Wellbore #1)	MWD	OWSG MWD - Standard

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Charles Ling Fed Com						
Charles Ling Fed Com #131H - Wellbore #1 - Design #1	12,368.76	12,138.90	1,294.56	1,209.01	15.132	CC
Charles Ling Fed Com #131H - Wellbore #1 - Design #1	16,779.28	16,812.66	1,319.14	1,141.74	7.436	ES, SF
Charles Ling Fed Com #201H - Wellbore #1 - Design #1	12,927.79	13,140.06	698.03	610.06	7.935	CC
Charles Ling Fed Com #201H - Wellbore #1 - Design #1	16,779.28	16,991.22	698.27	526.68	4.070	ES, SF
Charles Ling Fed Com #202H - Wellbore #1 - Design #1	1,149.41	1,150.10	17.44	9.66	2.242	CC
Charles Ling Fed Com #202H - Wellbore #1 - Design #1	1,200.00	1,200.57	17.79	9.64	2.184	ES, SF
Charles Ling Fed Com #211H - Wellbore #1 - Design #1	600.00	599.00	1,379.76	1,375.93	359.553	CC
Charles Ling Fed Com #211H - Wellbore #1 - Design #1	16,779.28	17,260.91	1,412.35	1,242.80	8.330	ES, SF
Charles Ling Fed Com #212H - Wellbore #1 - Design #1	600.00	599.00	60.00	56.16	15.636	CC
Charles Ling Fed Com #212H - Wellbore #1 - Design #1	700.00	698.44	60.46	55.91	13.285	ES
Charles Ling Fed Com #212H - Wellbore #1 - Design #1	11,650.00	11,646.18	171.30	88.23	2.062	SF
Roy Batty Federal COM						
Roy Batty Federal COM #1H - Wellbore #1 - Surveys	11,100.00	15,477.00	1,466.82	1,342.32	11.781	SF
Roy Batty Federal COM #1H - Wellbore #1 - Surveys	16,208.24	11,354.00	1,307.92	1,210.28	13.396	CC, ES
Roy Batty Federal COM #2H - Wellbore #1 - Surveys	11,130.52	15,660.00	322.38	238.29	3.834	CC, ES, SF
Stevens "11"						
Stevens 11 1 - Wellbore #1 - Surveys	15,036.46	12,015.10	321.39	-5.49	0.983	Level 1, CC, ES, SF

Offset Design												Offset Site Error: 0.00 usft	
Charles Ling Fed Com - Charles Ling Fed Com #131H - Wellbore #1 - Design #1												Offset Well Error: 0.00 usft	
Survey Program: 0-MWD													
Reference		Offset		Semi Major Axis		Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.00	0.00	0.00	0.00	0.00	0.00	-90.51	-11.67	-1,319.71	1,319.76				
100.00	100.00	99.00	99.00	0.13	0.13	-90.51	-11.67	-1,319.71	1,319.76	1,319.51	0.26	5,175.017	
200.00	200.00	199.00	199.00	0.49	0.48	-90.51	-11.67	-1,319.71	1,319.76	1,318.79	0.97	1,361.050	
300.00	300.00	299.00	299.00	0.85	0.84	-90.51	-11.67	-1,319.71	1,319.76	1,318.08	1.69	782.495	
400.00	400.00	399.00	399.00	1.20	1.20	-90.51	-11.67	-1,319.71	1,319.76	1,317.36	2.40	549.089	
500.00	500.00	499.00	499.00	1.56	1.56	-90.51	-11.67	-1,319.71	1,319.76	1,316.64	3.12	422.934	
600.00	600.00	599.00	599.00	1.92	1.92	-90.51	-11.67	-1,319.71	1,319.76	1,315.93	3.84	343.918	
700.00	700.00	699.00	699.00	2.28	2.28	-90.51	-11.67	-1,319.71	1,319.76	1,315.21	4.55	289.779	
800.00	800.00	799.00	799.00	2.64	2.63	-90.51	-11.67	-1,319.71	1,319.76	1,314.49	5.27	250.367	
900.00	900.00	899.00	899.00	3.00	2.99	-90.51	-11.67	-1,319.71	1,319.76	1,313.78	5.99	220.392	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #131H - Wellbore #1 - Design #1											Offset Site Error: 0.00 usft		
Survey Program: 0-MWD											Offset Well Error: 0.00 usft		
Reference		Offset		Semi Major Axis			Distance					Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		Separation Factor
1,000.00	1,000.00	999.00	999.00	3.35	3.35	-90.51	-11.67	-1,319.71	1,319.76	1,313.06	6.71	196.827	
1,100.00	1,100.00	1,099.00	1,099.00	3.71	3.71	-90.51	-11.67	-1,319.71	1,319.76	1,312.34	7.42	177.814	
1,200.00	1,200.00	1,193.39	1,193.39	4.07	4.05	-90.47	-10.93	-1,319.92	1,319.97	1,311.86	8.12	162.590	
1,300.00	1,299.99	1,287.70	1,287.67	4.43	4.39	-90.41	-8.71	-1,320.54	1,320.40	1,311.58	8.81	149.821	
1,400.00	1,399.96	1,381.99	1,381.87	4.79	4.72	-90.36	-4.99	-1,321.58	1,320.82	1,311.31	9.51	138.925	
1,500.00	1,499.86	1,476.25	1,475.98	5.15	5.06	-90.32	0.23	-1,323.03	1,321.23	1,311.03	10.20	129.501	
1,600.00	1,599.68	1,574.82	1,574.32	5.51	5.42	-90.29	6.80	-1,324.86	1,321.52	1,310.61	10.92	121.065	
1,600.23	1,599.90	1,575.05	1,574.55	5.51	5.42	-90.29	6.81	-1,324.87	1,321.52	1,310.60	10.92	121.047	
1,700.00	1,699.43	1,674.82	1,674.07	5.87	5.78	-90.29	13.51	-1,326.74	1,321.60	1,309.96	11.64	113.564	
1,800.00	1,799.19	1,774.82	1,773.83	6.23	6.14	-90.29	20.22	-1,328.61	1,321.68	1,309.32	12.36	106.916	
1,900.00	1,898.94	1,874.82	1,873.59	6.59	6.51	-90.29	26.94	-1,330.48	1,321.76	1,308.68	13.09	100.986	
2,000.00	1,998.70	1,974.82	1,973.34	6.95	6.87	-90.30	33.65	-1,332.36	1,321.84	1,308.03	13.82	95.668	
2,100.00	2,098.46	2,074.82	2,073.10	7.32	7.24	-90.30	40.36	-1,334.23	1,321.93	1,307.38	14.55	90.872	
2,200.00	2,198.21	2,174.82	2,172.86	7.69	7.60	-90.30	47.08	-1,336.10	1,322.01	1,306.73	15.28	86.527	
2,300.00	2,297.97	2,274.82	2,272.62	8.05	7.97	-90.30	53.79	-1,337.98	1,322.09	1,306.08	16.01	82.573	
2,400.00	2,397.72	2,374.82	2,372.37	8.42	8.34	-90.30	60.50	-1,339.85	1,322.17	1,305.42	16.74	78.960	
2,500.00	2,497.48	2,474.82	2,472.13	8.79	8.71	-90.30	67.22	-1,341.72	1,322.25	1,304.77	17.48	75.647	
2,600.00	2,597.24	2,574.82	2,571.89	9.16	9.08	-90.30	73.93	-1,343.59	1,322.33	1,304.11	18.21	72.598	
2,700.00	2,696.99	2,674.82	2,671.64	9.52	9.45	-90.31	80.64	-1,345.47	1,322.41	1,303.46	18.95	69.783	
2,800.00	2,796.75	2,774.82	2,771.40	9.89	9.81	-90.31	87.35	-1,347.34	1,322.49	1,302.80	19.69	67.176	
2,900.00	2,896.50	2,874.82	2,871.16	10.26	10.18	-90.31	94.07	-1,349.21	1,322.57	1,302.15	20.42	64.755	
3,000.00	2,996.26	2,974.82	2,970.91	10.63	10.55	-90.31	100.78	-1,351.09	1,322.65	1,301.49	21.16	62.502	
3,100.00	3,096.02	3,074.82	3,070.67	11.00	10.92	-90.31	107.49	-1,352.96	1,322.73	1,300.83	21.90	60.399	
3,200.00	3,195.77	3,174.82	3,170.43	11.37	11.29	-90.31	114.21	-1,354.83	1,322.81	1,300.18	22.64	58.432	
3,300.00	3,295.53	3,274.82	3,270.18	11.74	11.67	-90.31	120.92	-1,356.71	1,322.89	1,299.52	23.38	56.589	
3,400.00	3,395.29	3,374.82	3,369.94	12.11	12.04	-90.32	127.63	-1,358.58	1,322.98	1,298.86	24.12	54.858	
3,500.00	3,495.04	3,474.82	3,469.70	12.48	12.41	-90.32	134.35	-1,360.45	1,323.06	1,298.20	24.86	53.229	
3,600.00	3,594.80	3,574.82	3,569.45	12.85	12.78	-90.32	141.06	-1,362.32	1,323.14	1,297.54	25.60	51.694	
3,700.00	3,694.55	3,674.82	3,669.21	13.22	13.15	-90.32	147.77	-1,364.20	1,323.22	1,296.88	26.34	50.245	
3,800.00	3,794.31	3,774.82	3,768.97	13.59	13.52	-90.32	154.48	-1,366.07	1,323.30	1,296.22	27.08	48.874	
3,900.00	3,894.07	3,874.82	3,868.72	13.96	13.89	-90.32	161.20	-1,367.94	1,323.38	1,295.56	27.82	47.576	
4,000.00	3,993.82	3,974.82	3,968.48	14.34	14.26	-90.32	167.91	-1,369.82	1,323.46	1,294.90	28.56	46.345	
4,100.00	4,093.58	4,074.82	4,068.24	14.71	14.63	-90.32	174.62	-1,371.69	1,323.54	1,294.24	29.30	45.176	
4,200.00	4,193.33	4,174.82	4,167.99	15.08	15.00	-90.33	181.34	-1,373.56	1,323.62	1,293.58	30.04	44.064	
4,300.00	4,293.09	4,274.82	4,267.75	15.45	15.38	-90.33	188.05	-1,375.44	1,323.70	1,292.92	30.78	43.006	
4,400.00	4,392.85	4,374.82	4,367.51	15.82	15.75	-90.33	194.76	-1,377.31	1,323.78	1,292.26	31.52	41.997	
4,500.00	4,492.60	4,474.82	4,467.26	16.19	16.12	-90.33	201.48	-1,379.18	1,323.86	1,291.60	32.26	41.035	
4,600.00	4,592.36	4,574.82	4,567.02	16.56	16.49	-90.33	208.19	-1,381.05	1,323.95	1,290.94	33.00	40.115	
4,700.00	4,692.12	4,674.82	4,666.78	16.94	16.86	-90.33	214.90	-1,382.93	1,324.03	1,290.28	33.75	39.236	
4,800.00	4,791.87	4,774.82	4,766.54	17.31	17.23	-90.33	221.61	-1,384.80	1,324.11	1,289.62	34.49	38.394	
4,900.00	4,891.63	4,874.82	4,866.29	17.68	17.61	-90.34	228.33	-1,386.67	1,324.19	1,288.96	35.23	37.588	
5,000.00	4,991.38	4,974.82	4,966.05	18.05	17.98	-90.34	235.04	-1,388.55	1,324.27	1,288.30	35.97	36.815	
5,100.00	5,091.14	5,074.82	5,065.81	18.42	18.35	-90.34	241.75	-1,390.42	1,324.35	1,287.64	36.71	36.073	
5,200.00	5,190.90	5,174.82	5,165.56	18.79	18.72	-90.34	248.47	-1,392.29	1,324.43	1,286.97	37.45	35.361	
5,300.00	5,290.65	5,274.82	5,265.32	19.17	19.09	-90.34	255.18	-1,394.17	1,324.51	1,286.31	38.20	34.676	
5,400.00	5,390.41	5,374.82	5,365.08	19.54	19.47	-90.34	261.89	-1,396.04	1,324.59	1,285.65	38.94	34.017	
5,500.00	5,490.16	5,474.82	5,464.83	19.91	19.84	-90.34	268.61	-1,397.91	1,324.67	1,284.99	39.68	33.382	
5,600.00	5,589.92	5,574.82	5,564.59	20.28	20.21	-90.35	275.32	-1,399.78	1,324.75	1,284.33	40.42	32.771	
5,700.00	5,689.68	5,674.82	5,664.35	20.65	20.58	-90.35	282.03	-1,401.66	1,324.83	1,283.67	41.17	32.182	
5,800.00	5,789.43	5,775.36	5,764.64	21.03	20.96	-90.35	288.78	-1,403.54	1,324.91	1,283.00	41.91	31.612	
5,849.08	5,838.40	5,829.38	5,818.55	21.21	21.16	-90.35	291.96	-1,404.43	1,324.84	1,282.55	42.29	31.326	
5,900.00	5,889.21	5,885.39	5,874.51	21.40	21.36	-90.38	294.48	-1,405.13	1,324.66	1,281.98	42.68	31.034	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #131H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance								Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
6,000.00	5,989.11	5,995.36	5,984.44	21.76	21.75	-90.45	297.13	-1,405.87	1,324.23	1,280.79	43.44	30.485		
6,100.00	6,089.10	6,099.02	6,088.10	22.11	22.12	-90.51	297.33	-1,405.93	1,323.85	1,279.70	44.15	29.982		
6,115.90	6,105.00	6,114.92	6,104.00	22.17	22.17	-90.51	297.33	-1,405.93	1,323.84	1,279.58	44.27	29.907		
6,200.00	6,189.10	6,199.02	6,188.10	22.46	22.46	-90.51	297.33	-1,405.93	1,323.84	1,278.99	44.85	29.516		
6,300.00	6,289.10	6,299.02	6,288.10	22.81	22.81	-90.51	297.33	-1,405.93	1,323.84	1,278.29	45.55	29.063		
6,400.00	6,389.10	6,399.02	6,388.10	23.16	23.16	-90.51	297.33	-1,405.93	1,323.84	1,277.59	46.25	28.624		
6,500.00	6,489.10	6,499.02	6,488.10	23.51	23.51	-90.51	297.33	-1,405.93	1,323.84	1,276.90	46.95	28.198		
6,600.00	6,589.10	6,599.02	6,588.10	23.86	23.86	-90.51	297.33	-1,405.93	1,323.84	1,276.20	47.65	27.784		
6,700.00	6,689.10	6,699.02	6,688.10	24.21	24.21	-90.51	297.33	-1,405.93	1,323.84	1,275.50	48.35	27.381		
6,800.00	6,789.10	6,799.02	6,788.10	24.56	24.56	-90.51	297.33	-1,405.93	1,323.84	1,274.79	49.05	26.990		
6,900.00	6,889.10	6,899.02	6,888.10	24.91	24.91	-90.51	297.33	-1,405.93	1,323.84	1,274.09	49.75	26.610		
7,000.00	6,989.10	6,999.02	6,988.10	25.26	25.26	-90.51	297.33	-1,405.93	1,323.84	1,273.39	50.45	26.240		
7,100.00	7,089.10	7,099.02	7,088.10	25.61	25.61	-90.51	297.33	-1,405.93	1,323.84	1,272.69	51.15	25.880		
7,200.00	7,189.10	7,199.02	7,188.10	25.96	25.96	-90.51	297.33	-1,405.93	1,323.84	1,271.99	51.86	25.529		
7,300.00	7,289.10	7,299.02	7,288.10	26.31	26.31	-90.51	297.33	-1,405.93	1,323.84	1,271.28	52.56	25.188		
7,400.00	7,389.10	7,399.02	7,388.10	26.67	26.66	-90.51	297.33	-1,405.93	1,323.84	1,270.58	53.26	24.855		
7,500.00	7,489.10	7,499.02	7,488.10	27.02	27.02	-90.51	297.33	-1,405.93	1,323.84	1,269.88	53.97	24.531		
7,600.00	7,589.10	7,599.02	7,588.10	27.37	27.37	-90.51	297.33	-1,405.93	1,323.84	1,269.17	54.67	24.215		
7,700.00	7,689.10	7,699.02	7,688.10	27.72	27.72	-90.51	297.33	-1,405.93	1,323.84	1,268.47	55.37	23.907		
7,800.00	7,789.10	7,799.02	7,788.10	28.07	28.07	-90.51	297.33	-1,405.93	1,323.84	1,267.76	56.08	23.607		
7,900.00	7,889.10	7,899.02	7,888.10	28.43	28.42	-90.51	297.33	-1,405.93	1,323.84	1,267.06	56.78	23.314		
8,000.00	7,989.10	7,999.02	7,988.10	28.78	28.78	-90.51	297.33	-1,405.93	1,323.84	1,266.35	57.49	23.028		
8,100.00	8,089.10	8,099.02	8,088.10	29.13	29.13	-90.51	297.33	-1,405.93	1,323.84	1,265.65	58.19	22.749		
8,200.00	8,189.10	8,199.02	8,188.10	29.48	29.48	-90.51	297.33	-1,405.93	1,323.84	1,264.94	58.90	22.476		
8,300.00	8,289.10	8,299.02	8,288.10	29.84	29.83	-90.51	297.33	-1,405.93	1,323.84	1,264.24	59.61	22.210		
8,400.00	8,389.10	8,399.02	8,388.10	30.19	30.19	-90.51	297.33	-1,405.93	1,323.84	1,263.53	60.31	21.950		
8,500.00	8,489.10	8,499.02	8,488.10	30.54	30.54	-90.51	297.33	-1,405.93	1,323.84	1,262.82	61.02	21.695		
8,600.00	8,589.10	8,599.02	8,588.10	30.90	30.89	-90.51	297.33	-1,405.93	1,323.84	1,262.12	61.73	21.447		
8,700.00	8,689.10	8,699.02	8,688.10	31.25	31.25	-90.51	297.33	-1,405.93	1,323.84	1,261.41	62.43	21.204		
8,800.00	8,789.10	8,799.02	8,788.10	31.60	31.60	-90.51	297.33	-1,405.93	1,323.84	1,260.70	63.14	20.967		
8,900.00	8,889.10	8,899.02	8,888.10	31.96	31.95	-90.51	297.33	-1,405.93	1,323.84	1,260.00	63.85	20.734		
9,000.00	8,989.10	8,999.02	8,988.10	32.31	32.31	-90.51	297.33	-1,405.93	1,323.84	1,259.29	64.56	20.507		
9,100.00	9,089.10	9,099.02	9,088.10	32.66	32.66	-90.51	297.33	-1,405.93	1,323.84	1,258.58	65.26	20.285		
9,200.00	9,189.10	9,199.02	9,188.10	33.02	33.02	-90.51	297.33	-1,405.93	1,323.84	1,257.87	65.97	20.067		
9,300.00	9,289.10	9,299.02	9,288.10	33.37	33.37	-90.51	297.33	-1,405.93	1,323.84	1,257.16	66.68	19.854		
9,400.00	9,389.10	9,399.02	9,388.10	33.73	33.72	-90.51	297.33	-1,405.93	1,323.84	1,256.46	67.39	19.645		
9,500.00	9,489.10	9,499.02	9,488.10	34.08	34.08	-90.51	297.33	-1,405.93	1,323.84	1,255.75	68.10	19.441		
9,600.00	9,589.10	9,599.02	9,588.10	34.43	34.43	-90.51	297.33	-1,405.93	1,323.84	1,255.04	68.81	19.240		
9,700.00	9,689.10	9,699.02	9,688.10	34.79	34.79	-90.51	297.33	-1,405.93	1,323.84	1,254.33	69.51	19.044		
9,800.00	9,789.10	9,799.02	9,788.10	35.14	35.14	-90.51	297.33	-1,405.93	1,323.84	1,253.62	70.22	18.852		
9,900.00	9,889.10	9,899.02	9,888.10	35.50	35.50	-90.51	297.33	-1,405.93	1,323.84	1,252.91	70.93	18.663		
10,000.00	9,989.10	9,999.02	9,988.10	35.85	35.85	-90.51	297.33	-1,405.93	1,323.84	1,252.20	71.64	18.478		
10,100.00	10,089.10	10,099.02	10,088.10	36.21	36.20	-90.51	297.33	-1,405.93	1,323.84	1,251.49	72.35	18.297		
10,200.00	10,189.10	10,199.02	10,188.10	36.56	36.56	-90.51	297.33	-1,405.93	1,323.84	1,250.78	73.06	18.120		
10,300.00	10,289.10	10,299.02	10,288.10	36.92	36.91	-90.51	297.33	-1,405.93	1,323.84	1,250.07	73.77	17.945		
10,400.00	10,389.10	10,399.02	10,388.10	37.27	37.27	-90.51	297.33	-1,405.93	1,323.84	1,249.36	74.48	17.774		
10,500.00	10,489.10	10,499.02	10,488.10	37.63	37.62	-90.51	297.33	-1,405.93	1,323.84	1,248.65	75.19	17.606		
10,600.00	10,589.10	10,599.02	10,588.10	37.98	37.98	-90.51	297.33	-1,405.93	1,323.84	1,247.94	75.90	17.442		
10,700.00	10,689.10	10,699.02	10,688.10	38.34	38.33	-90.51	297.33	-1,405.93	1,323.84	1,247.23	76.61	17.280		
10,800.00	10,789.10	10,799.02	10,788.10	38.69	38.69	-90.51	297.33	-1,405.93	1,323.84	1,246.52	77.32	17.121		
10,900.00	10,889.10	10,899.02	10,888.10	39.05	39.04	-90.51	297.33	-1,405.93	1,323.84	1,245.81	78.03	16.965		
11,000.00	10,989.10	10,999.02	10,988.10	39.40	39.40	-90.51	297.33	-1,405.93	1,323.84	1,245.10	78.74	16.812		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #131H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
11,100.00	11,089.10	11,099.02	11,088.10	39.76	39.76	-90.51	297.33	-1,405.93	1,323.84	1,244.39	79.45	16.662	
11,200.00	11,189.10	11,199.02	11,188.10	40.11	40.11	-90.51	297.33	-1,405.93	1,323.84	1,243.68	80.17	16.514	
11,300.00	11,289.10	11,299.02	11,288.10	40.47	40.47	-90.51	297.33	-1,405.93	1,323.84	1,242.97	80.88	16.369	
11,400.00	11,389.10	11,399.02	11,388.10	40.82	40.82	-90.51	297.33	-1,405.93	1,323.84	1,242.26	81.59	16.226	
11,443.94	11,433.04	11,442.96	11,432.04	40.98	40.98	-90.51	297.33	-1,405.93	1,323.84	1,241.94	81.90	16.164	
11,450.00	11,439.10	11,449.02	11,438.10	41.00	41.00	-90.51	297.33	-1,405.93	1,323.84	1,241.89	81.94	16.156	
11,500.00	11,489.01	11,493.28	11,482.36	41.16	41.15	-90.40	297.20	-1,405.95	1,323.32	1,241.07	82.25	16.088	
11,550.00	11,538.49	11,527.51	11,516.54	41.31	41.26	-90.18	295.48	-1,406.29	1,322.41	1,239.90	82.51	16.028	
11,600.00	11,587.17	11,561.85	11,550.66	41.45	41.37	-89.86	291.74	-1,407.02	1,321.23	1,238.49	82.74	15.968	
11,650.00	11,634.68	11,600.00	11,588.22	41.58	41.48	-89.48	285.24	-1,408.29	1,319.81	1,236.84	82.97	15.907	
11,700.00	11,680.66	11,631.02	11,618.39	41.70	41.56	-88.95	278.16	-1,409.67	1,318.16	1,235.00	83.15	15.852	
11,750.00	11,724.75	11,665.92	11,651.80	41.81	41.66	-88.37	268.29	-1,411.60	1,316.32	1,232.99	83.34	15.795	
11,800.00	11,766.62	11,700.00	11,683.78	41.91	41.74	-87.70	256.74	-1,413.85	1,314.34	1,230.83	83.51	15.739	
11,850.00	11,805.95	11,736.56	11,717.24	42.00	41.83	-87.00	242.30	-1,416.67	1,312.23	1,228.55	83.68	15.681	
11,900.00	11,842.44	11,772.38	11,749.06	42.09	41.91	-86.23	226.15	-1,419.83	1,310.05	1,226.20	83.85	15.624	
11,950.00	11,875.82	11,808.62	11,780.13	42.17	41.99	-85.43	207.86	-1,423.40	1,307.83	1,223.82	84.01	15.567	
12,000.00	11,905.83	11,850.00	11,814.09	42.25	42.07	-84.71	184.67	-1,427.93	1,305.64	1,221.44	84.20	15.506	
12,050.00	11,932.24	11,882.57	11,839.56	42.34	42.13	-83.74	164.76	-1,431.82	1,303.49	1,219.14	84.35	15.453	
12,100.00	11,954.85	11,920.43	11,867.66	42.44	42.19	-82.90	139.87	-1,436.68	1,301.46	1,216.93	84.53	15.396	
12,150.00	11,973.49	11,958.98	11,894.50	42.53	42.26	-82.07	112.71	-1,441.98	1,299.59	1,214.87	84.72	15.340	
12,200.00	11,988.01	12,000.00	11,920.94	42.63	42.32	-81.35	81.95	-1,447.99	1,297.93	1,213.02	84.91	15.286	
12,250.00	11,998.31	12,038.60	11,943.72	42.73	42.39	-80.56	51.37	-1,453.96	1,296.52	1,211.42	85.10	15.236	
12,300.00	12,004.31	12,079.91	11,965.71	42.84	42.46	-79.91	17.06	-1,460.66	1,295.41	1,210.12	85.29	15.188	
12,343.94	12,006.00	12,117.19	11,983.34	42.93	42.53	-79.43	-15.16	-1,466.95	1,294.72	1,209.26	85.45	15.151	
12,368.76	12,006.00	12,138.90	11,992.62	42.99	42.57	-79.20	-34.44	-1,470.72	1,294.56	1,209.01	85.55	15.132 CC	
12,400.00	12,006.00	12,167.34	12,003.63	43.06	42.63	-78.97	-60.16	-1,475.74	1,294.79	1,209.13	85.67	15.114	
12,500.00	12,006.00	12,265.49	12,031.40	43.33	42.82	-78.71	-152.43	-1,493.76	1,298.34	1,212.24	86.10	15.080	
12,600.00	12,006.00	12,370.75	12,042.91	43.66	43.04	-78.92	-254.98	-1,513.79	1,305.36	1,218.74	86.62	15.070	
12,700.00	12,006.00	12,547.03	12,043.00	44.05	43.50	-82.27	-428.82	-1,542.83	1,312.98	1,225.57	87.41	15.021	
12,800.00	12,006.00	12,731.67	12,043.00	44.48	44.16	-85.96	-612.46	-1,561.75	1,317.70	1,229.28	88.42	14.903	
12,900.00	12,006.00	12,916.88	12,043.00	44.96	44.98	-89.67	-797.50	-1,568.81	1,319.45	1,229.86	89.60	14.727	
12,927.98	12,006.00	12,961.36	12,043.00	45.11	45.21	-90.39	-841.98	-1,568.73	1,319.43	1,229.49	89.94	14.670	
13,000.00	12,006.00	13,033.38	12,043.00	45.50	45.61	-90.39	-914.00	-1,568.25	1,319.43	1,228.71	90.72	14.544	
13,100.00	12,006.00	13,133.38	12,043.00	46.08	46.19	-90.39	-1,013.99	-1,567.58	1,319.42	1,227.53	91.89	14.359	
13,200.00	12,006.00	13,233.38	12,043.00	46.72	46.82	-90.39	-1,113.99	-1,566.90	1,319.41	1,226.25	93.16	14.163	
13,300.00	12,006.00	13,333.38	12,043.00	47.40	47.50	-90.39	-1,213.99	-1,566.23	1,319.41	1,224.88	94.53	13.958	
13,400.00	12,006.00	13,433.38	12,043.00	48.13	48.23	-90.39	-1,313.99	-1,565.56	1,319.40	1,223.41	95.99	13.745	
13,500.00	12,006.00	13,533.38	12,043.00	48.91	49.00	-90.39	-1,413.98	-1,564.89	1,319.39	1,221.84	97.55	13.526	
13,600.00	12,006.00	13,633.38	12,043.00	49.73	49.82	-90.39	-1,513.98	-1,564.22	1,319.38	1,220.20	99.19	13.302	
13,700.00	12,006.00	13,733.38	12,043.00	50.59	50.68	-90.39	-1,613.98	-1,563.54	1,319.37	1,218.47	100.91	13.075	
13,800.00	12,006.00	13,833.38	12,043.00	51.49	51.57	-90.39	-1,713.98	-1,562.87	1,319.37	1,216.66	102.71	12.846	
13,900.00	12,006.00	13,933.38	12,043.00	52.42	52.50	-90.39	-1,813.98	-1,562.20	1,319.36	1,214.78	104.58	12.616	
14,000.00	12,006.00	14,033.38	12,043.00	53.39	53.47	-90.39	-1,913.97	-1,561.53	1,319.35	1,212.83	106.52	12.386	
14,100.00	12,006.00	14,133.38	12,043.00	54.39	54.47	-90.39	-2,013.97	-1,560.86	1,319.34	1,210.82	108.53	12.157	
14,200.00	12,006.00	14,233.38	12,043.00	55.43	55.50	-90.39	-2,113.97	-1,560.18	1,319.34	1,208.74	110.60	11.929	
14,300.00	12,006.00	14,333.38	12,043.00	56.49	56.56	-90.39	-2,213.97	-1,559.51	1,319.33	1,206.60	112.72	11.704	
14,400.00	12,006.00	14,433.38	12,043.00	57.58	57.65	-90.39	-2,313.96	-1,558.84	1,319.32	1,204.41	114.91	11.482	
14,500.00	12,006.00	14,533.38	12,043.00	58.70	58.77	-90.39	-2,413.96	-1,558.17	1,319.31	1,202.17	117.14	11.262	
14,600.00	12,006.00	14,633.38	12,043.00	59.84	59.91	-90.39	-2,513.96	-1,557.50	1,319.31	1,199.88	119.43	11.047	
14,700.00	12,006.00	14,733.38	12,043.00	61.01	61.07	-90.39	-2,613.96	-1,556.82	1,319.30	1,197.54	121.76	10.835	
14,800.00	12,006.00	14,833.38	12,043.00	62.19	62.25	-90.39	-2,713.95	-1,556.15	1,319.29	1,195.15	124.14	10.627	
14,900.00	12,006.00	14,933.38	12,043.00	63.40	63.46	-90.39	-2,813.95	-1,555.48	1,319.28	1,192.72	126.56	10.424	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #131H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
15,000.00	12,006.00	15,033.38	12,043.00	64.63	64.69	-90.39	-2,913.95	-1,554.81	1,319.28	1,190.26	129.02	10.226		
15,100.00	12,006.00	15,133.38	12,043.00	65.88	65.93	-90.39	-3,013.95	-1,554.14	1,319.27	1,187.76	131.51	10.032		
15,200.00	12,006.00	15,233.38	12,043.00	67.14	67.19	-90.39	-3,113.95	-1,553.46	1,319.26	1,185.22	134.04	9.842		
15,300.00	12,006.00	15,333.38	12,043.00	68.42	68.47	-90.39	-3,213.94	-1,552.79	1,319.25	1,182.65	136.60	9.658		
15,400.00	12,006.00	15,433.38	12,043.00	69.72	69.77	-90.39	-3,313.94	-1,552.12	1,319.25	1,180.05	139.20	9.477		
15,500.00	12,006.00	15,533.38	12,043.00	71.03	71.08	-90.39	-3,413.94	-1,551.45	1,319.24	1,177.42	141.82	9.302		
15,600.00	12,006.00	15,633.38	12,043.00	72.35	72.40	-90.39	-3,513.94	-1,550.78	1,319.23	1,174.76	144.47	9.131		
15,700.00	12,006.00	15,733.38	12,043.00	73.69	73.74	-90.39	-3,613.93	-1,550.10	1,319.22	1,172.07	147.15	8.965		
15,800.00	12,006.00	15,833.38	12,043.00	75.04	75.08	-90.39	-3,713.93	-1,549.43	1,319.21	1,169.36	149.85	8.803		
15,900.00	12,006.00	15,933.38	12,043.00	76.41	76.45	-90.39	-3,813.93	-1,548.76	1,319.21	1,166.63	152.58	8.646		
16,000.00	12,006.00	16,033.38	12,043.00	77.78	77.82	-90.39	-3,913.93	-1,548.09	1,319.20	1,163.87	155.33	8.493		
16,100.00	12,006.00	16,133.38	12,043.00	79.16	79.20	-90.39	-4,013.93	-1,547.42	1,319.19	1,161.09	158.10	8.344		
16,200.00	12,006.00	16,233.38	12,043.00	80.56	80.59	-90.39	-4,113.92	-1,546.74	1,319.18	1,158.30	160.89	8.199		
16,300.00	12,006.00	16,333.38	12,043.00	81.96	82.00	-90.39	-4,213.92	-1,546.07	1,319.18	1,155.48	163.70	8.059		
16,400.00	12,006.00	16,433.38	12,043.00	83.38	83.41	-90.39	-4,313.92	-1,545.40	1,319.17	1,152.64	166.53	7.922		
16,500.00	12,006.00	16,533.38	12,043.00	84.80	84.83	-90.39	-4,413.92	-1,544.73	1,319.16	1,149.79	169.37	7.789		
16,600.00	12,006.00	16,633.38	12,043.00	86.23	86.26	-90.39	-4,513.91	-1,544.06	1,319.15	1,146.92	172.23	7.659		
16,700.00	12,006.00	16,733.38	12,043.00	87.67	87.69	-90.39	-4,613.91	-1,543.38	1,319.15	1,144.04	175.11	7.533		
16,778.77	12,006.00	16,812.15	12,043.00	88.80	88.83	-90.39	-4,692.68	-1,542.85	1,319.14	1,141.76	177.38	7.437		
16,779.28	12,006.00	16,812.66	12,043.00	88.82	88.85	-90.39	-4,693.19	-1,542.85	1,319.14	1,141.74	177.40	7.436 ES, SF		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #201H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
0.00	0.00	0.00	0.00	0.00	0.00	-90.50	-11.89	-1,349.71	1,349.76					
100.00	100.00	100.00	100.00	0.13	0.13	-90.50	-11.89	-1,349.71	1,349.76	1,349.51	0.26	5,266.192		
200.00	200.00	200.00	200.00	0.49	0.49	-90.50	-11.89	-1,349.71	1,349.76	1,348.79	0.97	1,386.862		
300.00	300.00	300.00	300.00	0.85	0.85	-90.50	-11.89	-1,349.71	1,349.76	1,348.07	1.69	798.586		
400.00	400.00	400.00	400.00	1.20	1.20	-90.50	-11.89	-1,349.71	1,349.76	1,347.36	2.41	560.734		
500.00	500.00	500.00	500.00	1.56	1.56	-90.50	-11.89	-1,349.71	1,349.76	1,346.64	3.12	432.052		
600.00	600.00	600.00	600.00	1.92	1.92	-90.50	-11.89	-1,349.71	1,349.76	1,345.92	3.84	351.408		
700.00	700.00	740.37	740.34	2.28	2.42	-90.44	-10.38	-1,347.62	1,348.27	1,343.57	4.70	287.080		
800.00	800.00	880.37	880.11	2.64	2.92	-90.25	-5.85	-1,341.38	1,343.79	1,338.24	5.55	242.265		
900.00	900.00	976.29	975.81	3.00	3.26	-90.08	-1.94	-1,335.98	1,338.13	1,331.88	6.25	214.200		
1,000.00	1,000.00	1,076.05	1,075.32	3.35	3.63	-89.91	2.15	-1,330.34	1,332.47	1,325.51	6.96	191.389		
1,100.00	1,100.00	1,175.80	1,174.83	3.71	3.99	-89.73	6.24	-1,324.70	1,326.82	1,319.15	7.68	172.802		
1,200.00	1,200.00	1,275.56	1,274.34	4.07	4.36	-89.55	10.33	-1,319.06	1,321.19	1,312.80	8.40	157.364		
1,300.00	1,299.99	1,375.33	1,373.87	4.43	4.72	-89.41	14.42	-1,313.42	1,315.34	1,306.22	9.11	144.326		
1,400.00	1,399.96	1,475.12	1,473.42	4.79	5.09	-89.34	18.51	-1,307.77	1,309.03	1,299.20	9.83	133.144		
1,500.00	1,499.86	1,574.89	1,572.94	5.15	5.46	-89.34	22.60	-1,302.13	1,302.25	1,291.70	10.55	123.435		
1,600.00	1,599.68	1,674.61	1,672.42	5.51	5.83	-89.42	26.69	-1,296.49	1,295.02	1,283.75	11.27	114.912		
1,600.23	1,599.90	1,674.84	1,672.65	5.51	5.83	-89.42	26.70	-1,296.48	1,295.00	1,283.73	11.27	114.894		
1,700.00	1,699.43	1,774.30	1,771.86	5.87	6.20	-89.53	30.77	-1,290.86	1,287.56	1,275.57	11.99	107.381		
1,800.00	1,799.19	1,873.98	1,871.31	6.23	6.57	-89.65	34.86	-1,285.22	1,280.11	1,267.39	12.71	100.693		
1,900.00	1,898.94	1,973.67	1,970.75	6.59	6.94	-89.76	38.94	-1,279.58	1,272.66	1,259.22	13.44	94.714		
2,000.00	1,998.70	2,073.36	2,070.20	6.95	7.31	-89.88	43.03	-1,273.95	1,265.22	1,251.05	14.16	89.340		
2,100.00	2,098.46	2,173.05	2,169.64	7.32	7.68	-90.00	47.12	-1,268.31	1,257.78	1,242.89	14.89	84.484		
2,200.00	2,198.21	2,272.74	2,269.09	7.69	8.05	-90.13	51.20	-1,262.67	1,250.35	1,234.73	15.61	80.075		
2,300.00	2,297.97	2,372.42	2,368.53	8.05	8.42	-90.25	55.29	-1,257.03	1,242.92	1,226.58	16.34	76.056		
2,400.00	2,297.72	2,472.11	2,467.97	8.42	8.79	-90.38	59.37	-1,251.40	1,235.50	1,218.43	17.07	72.377		
2,500.00	2,497.48	2,571.80	2,567.42	8.79	9.16	-90.50	63.46	-1,245.76	1,228.09	1,210.29	17.80	68.997		
2,600.00	2,597.24	2,671.49	2,666.86	9.16	9.53	-90.63	67.54	-1,240.12	1,220.68	1,202.15	18.53	65.882		
2,700.00	2,696.99	2,771.17	2,766.31	9.52	9.90	-90.76	71.63	-1,234.49	1,213.27	1,194.02	19.26	63.002		
2,800.00	2,796.75	2,870.86	2,865.75	9.89	10.28	-90.89	75.72	-1,228.85	1,205.88	1,185.89	19.99	60.331		
2,900.00	2,896.50	2,970.55	2,965.20	10.26	10.65	-91.02	79.80	-1,223.21	1,198.49	1,177.77	20.72	57.847		
3,000.00	2,996.26	3,070.24	3,064.64	10.63	11.02	-91.16	83.89	-1,217.58	1,191.11	1,169.66	21.45	55.533		
3,100.00	3,096.02	3,169.92	3,164.08	11.00	11.39	-91.29	87.97	-1,211.94	1,183.73	1,161.55	22.18	53.370		
3,200.00	3,195.77	3,269.61	3,263.53	11.37	11.76	-91.43	92.06	-1,206.30	1,176.36	1,153.45	22.91	51.345		
3,300.00	3,295.53	3,369.30	3,362.97	11.74	12.13	-91.57	96.15	-1,200.67	1,169.00	1,145.36	23.64	49.446		
3,400.00	3,395.29	3,468.99	3,462.42	12.11	12.51	-91.71	100.23	-1,195.03	1,161.64	1,137.27	24.37	47.660		
3,500.00	3,495.04	3,568.68	3,561.86	12.48	12.88	-91.86	104.32	-1,189.39	1,154.29	1,129.19	25.11	45.978		
3,600.00	3,594.80	3,668.36	3,661.31	12.85	13.25	-92.00	108.40	-1,183.75	1,146.95	1,121.11	25.84	44.392		
3,700.00	3,694.55	3,768.05	3,760.75	13.22	13.62	-92.15	112.49	-1,178.12	1,139.62	1,113.05	26.57	42.893		
3,800.00	3,794.31	3,867.74	3,860.19	13.59	13.99	-92.30	116.58	-1,172.48	1,132.29	1,104.99	27.30	41.474		
3,900.00	3,894.07	3,967.43	3,959.64	13.96	14.36	-92.45	120.66	-1,166.84	1,124.97	1,096.94	28.03	40.130		
4,000.00	3,993.82	4,067.11	4,059.08	14.34	14.74	-92.60	124.75	-1,161.21	1,117.66	1,088.90	28.77	38.854		
4,100.00	4,093.58	4,166.80	4,158.53	14.71	15.11	-92.76	128.83	-1,155.57	1,110.36	1,080.86	29.50	37.642		
4,200.00	4,193.33	4,266.49	4,257.97	15.08	15.48	-92.91	132.92	-1,149.93	1,103.07	1,072.83	30.23	36.488		
4,300.00	4,293.09	4,366.18	4,357.42	15.45	15.85	-93.07	137.01	-1,144.30	1,095.78	1,064.82	30.96	35.390		
4,400.00	4,392.85	4,465.86	4,456.86	15.82	16.22	-93.23	141.09	-1,138.66	1,088.50	1,056.81	31.70	34.342		
4,500.00	4,492.60	4,565.55	4,556.30	16.19	16.60	-93.40	145.18	-1,133.02	1,081.23	1,048.80	32.43	33.342		
4,600.00	4,592.36	4,665.24	4,655.75	16.56	16.97	-93.56	149.26	-1,127.39	1,073.97	1,040.81	33.16	32.386		
4,700.00	4,692.12	4,764.93	4,755.19	16.94	17.34	-93.73	153.35	-1,121.75	1,066.72	1,032.83	33.89	31.472		
4,800.00	4,791.87	4,864.62	4,854.64	17.31	17.71	-93.90	157.43	-1,116.11	1,059.48	1,024.85	34.63	30.597		
4,900.00	4,891.63	4,964.30	4,954.08	17.68	18.09	-94.07	161.52	-1,110.48	1,052.25	1,016.89	35.36	29.758		
5,000.00	4,991.38	5,063.99	5,053.53	18.05	18.46	-94.25	165.61	-1,104.84	1,045.03	1,008.93	36.09	28.954		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #201H - Wellbore #1 - Design #1														Offset Site Error:	0.00 usft
Survey Program: 0-MWD														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
5,100.00	5,091.14	5,163.68	5,152.97	18.42	18.83	-94.42	169.69	-1,099.20	1,037.81	1,000.99	36.83	28.182			
5,200.00	5,190.90	5,263.37	5,252.41	18.79	19.20	-94.60	173.78	-1,093.56	1,030.61	993.05	37.56	27.440			
5,300.00	5,290.65	5,363.05	5,351.86	19.17	19.57	-94.78	177.86	-1,087.93	1,023.42	985.13	38.29	26.727			
5,400.00	5,390.41	5,462.74	5,451.30	19.54	19.95	-94.97	181.95	-1,082.29	1,016.24	977.21	39.02	26.041			
5,500.00	5,490.16	5,562.43	5,550.75	19.91	20.32	-95.16	186.04	-1,076.65	1,009.06	969.31	39.76	25.381			
5,600.00	5,589.92	5,662.12	5,650.19	20.28	20.69	-95.35	190.12	-1,071.02	1,001.90	961.41	40.49	24.744			
5,700.00	5,689.68	5,761.80	5,749.64	20.65	21.06	-95.54	194.21	-1,065.38	994.75	953.53	41.22	24.131			
5,800.00	5,789.43	5,861.49	5,849.08	21.03	21.44	-95.73	198.29	-1,059.74	987.62	945.66	41.96	23.539			
5,849.08	5,838.40	5,910.42	5,897.89	21.21	21.62	-95.83	200.30	-1,056.98	984.12	941.80	42.32	23.256			
5,900.00	5,889.21	5,961.19	5,948.54	21.40	21.81	-95.91	202.38	-1,054.11	980.54	937.85	42.69	22.970			
6,000.00	5,989.11	6,060.96	6,048.06	21.76	22.18	-95.96	206.47	-1,048.46	973.82	930.41	43.41	22.431			
6,100.00	6,089.10	6,160.74	6,147.60	22.11	22.55	-95.86	210.56	-1,042.82	967.50	923.37	44.13	21.923			
6,115.90	6,105.00	6,176.61	6,163.43	22.17	22.61	-95.82	211.21	-1,041.92	966.54	922.29	44.24	21.845			
6,200.00	6,189.10	6,260.50	6,247.11	22.46	22.93	-95.65	214.65	-1,037.18	961.46	916.61	44.84	21.440			
6,300.00	6,289.10	6,360.26	6,346.63	22.81	23.30	-95.44	218.74	-1,031.54	955.43	909.87	45.56	20.972			
6,400.00	6,389.10	6,460.01	6,446.14	23.16	23.67	-95.22	222.83	-1,025.90	949.42	903.15	46.27	20.519			
6,500.00	6,489.10	6,559.77	6,545.65	23.51	24.04	-95.01	226.91	-1,020.26	943.41	896.43	46.98	20.080			
6,600.00	6,589.10	6,659.52	6,645.16	23.86	24.42	-94.79	231.00	-1,014.62	937.43	889.73	47.70	19.654			
6,700.00	6,689.10	6,759.28	6,744.67	24.21	24.79	-94.57	235.09	-1,008.98	931.45	883.04	48.41	19.240			
6,800.00	6,789.10	6,859.03	6,844.19	24.56	25.16	-94.34	239.18	-1,003.34	925.49	876.37	49.13	18.839			
6,900.00	6,889.10	6,958.79	6,943.70	24.91	25.53	-94.11	243.27	-997.70	919.55	869.71	49.84	18.450			
7,000.00	6,989.10	7,058.55	7,043.21	25.26	25.91	-93.88	247.36	-992.06	913.62	863.06	50.56	18.071			
7,100.00	7,089.10	7,158.30	7,142.72	25.61	26.28	-93.65	251.45	-986.41	907.70	856.43	51.27	17.704			
7,200.00	7,189.10	7,258.06	7,242.24	25.96	26.65	-93.41	255.53	-980.77	901.80	849.81	51.99	17.346			
7,300.00	7,289.10	7,357.81	7,341.75	26.31	27.02	-93.17	259.62	-975.13	895.92	843.21	52.70	16.999			
7,400.00	7,389.10	7,457.57	7,441.26	26.67	27.40	-92.93	263.71	-969.49	890.05	836.63	53.42	16.661			
7,500.00	7,489.10	7,557.33	7,540.77	27.02	27.77	-92.68	267.80	-963.85	884.19	830.06	54.14	16.332			
7,600.00	7,589.10	7,657.08	7,640.28	27.37	28.14	-92.43	271.89	-958.21	878.36	823.50	54.86	16.012			
7,700.00	7,689.10	7,756.84	7,739.80	27.72	28.51	-92.18	275.98	-952.57	872.54	816.97	55.57	15.701			
7,800.00	7,789.10	7,856.59	7,839.31	28.07	28.89	-91.92	280.07	-946.93	866.74	810.45	56.29	15.397			
7,900.00	7,889.10	7,956.35	7,938.82	28.43	29.26	-91.66	284.16	-941.29	860.95	803.94	57.01	15.102			
8,000.00	7,989.10	8,056.10	8,038.33	28.78	29.63	-91.40	288.24	-935.65	855.19	797.46	57.73	14.814			
8,100.00	8,089.10	8,155.86	8,137.85	29.13	30.01	-91.13	292.33	-930.01	849.44	790.99	58.45	14.533			
8,200.00	8,189.10	8,254.83	8,236.57	29.48	30.38	-90.87	296.39	-924.41	843.71	784.54	59.17	14.260			
8,300.00	8,289.10	8,339.42	8,321.03	29.84	30.69	-90.67	299.25	-920.46	838.99	779.15	59.85	14.019			
8,400.00	8,389.10	8,424.19	8,405.74	30.19	30.99	-90.56	301.02	-918.03	836.10	775.58	60.51	13.817			
8,500.00	8,489.10	8,509.06	8,490.59	30.54	31.29	-90.51	301.68	-917.11	835.01	773.85	61.16	13.653			
8,537.00	8,526.09	8,544.56	8,526.09	30.67	31.41	-90.51	301.69	-917.11	835.00	773.59	61.41	13.597			
8,600.00	8,589.10	8,607.56	8,589.10	30.90	31.62	-90.51	301.69	-917.11	835.00	773.15	61.85	13.500			
8,700.00	8,689.10	8,707.56	8,689.10	31.25	31.96	-90.51	301.69	-917.11	835.00	772.45	62.55	13.349			
8,800.00	8,789.10	8,807.56	8,789.10	31.60	32.30	-90.51	301.69	-917.11	835.00	771.75	63.25	13.202			
8,900.00	8,889.10	8,907.56	8,889.10	31.96	32.65	-90.51	301.69	-917.11	835.00	771.05	63.95	13.057			
9,000.00	8,989.10	9,007.56	8,989.10	32.31	32.99	-90.51	301.69	-917.11	835.00	770.35	64.65	12.916			
9,100.00	9,089.10	9,107.56	9,089.10	32.66	33.33	-90.51	301.69	-917.11	835.00	769.65	65.35	12.777			
9,200.00	9,189.10	9,207.56	9,189.10	33.02	33.67	-90.51	301.69	-917.11	835.00	768.95	66.05	12.642			
9,300.00	9,289.10	9,307.56	9,289.10	33.37	34.01	-90.51	301.69	-917.11	835.00	768.25	66.75	12.509			
9,400.00	9,389.10	9,407.56	9,389.10	33.73	34.36	-90.51	301.69	-917.11	835.00	767.55	67.45	12.379			
9,500.00	9,489.10	9,507.56	9,489.10	34.08	34.70	-90.51	301.69	-917.11	835.00	766.85	68.16	12.251			
9,600.00	9,589.10	9,607.56	9,589.10	34.43	35.04	-90.51	301.69	-917.11	835.00	766.14	68.86	12.127			
9,700.00	9,689.10	9,707.56	9,689.10	34.79	35.39	-90.51	301.69	-917.11	835.00	765.44	69.56	12.004			
9,800.00	9,789.10	9,807.56	9,789.10	35.14	35.73	-90.51	301.69	-917.11	835.00	764.74	70.26	11.884			
9,900.00	9,889.10	9,907.56	9,889.10	35.50	36.07	-90.51	301.69	-917.11	835.00	764.04	70.97	11.766			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #201H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
10,000.00	9,989.10	10,007.56	9,989.10	35.85	36.42	-90.51	301.69	-917.11	835.00	763.33	71.67	11.651	
10,100.00	10,089.10	10,107.56	10,089.10	36.21	36.76	-90.51	301.69	-917.11	835.00	762.63	72.37	11.538	
10,200.00	10,189.10	10,207.56	10,189.10	36.56	37.11	-90.51	301.69	-917.11	835.00	761.93	73.08	11.426	
10,300.00	10,289.10	10,307.56	10,289.10	36.92	37.45	-90.51	301.69	-917.11	835.00	761.22	73.78	11.317	
10,400.00	10,389.10	10,407.56	10,389.10	37.27	37.80	-90.51	301.69	-917.11	835.00	760.52	74.48	11.210	
10,500.00	10,489.10	10,507.56	10,489.10	37.63	38.15	-90.51	301.69	-917.11	835.00	759.81	75.19	11.105	
10,600.00	10,589.10	10,607.56	10,589.10	37.98	38.49	-90.51	301.69	-917.11	835.00	759.11	75.89	11.002	
10,700.00	10,689.10	10,707.56	10,689.10	38.34	38.84	-90.51	301.69	-917.11	835.00	758.40	76.60	10.901	
10,800.00	10,789.10	10,807.56	10,789.10	38.69	39.19	-90.51	301.69	-917.11	835.00	757.70	77.30	10.801	
10,900.00	10,889.10	10,907.56	10,889.10	39.05	39.53	-90.51	301.69	-917.11	835.00	756.99	78.01	10.704	
11,000.00	10,989.10	11,007.56	10,989.10	39.40	39.88	-90.51	301.69	-917.11	835.00	756.29	78.72	10.608	
11,100.00	11,089.10	11,107.56	11,089.10	39.76	40.23	-90.51	301.69	-917.11	835.00	755.58	79.42	10.514	
11,200.00	11,189.10	11,207.56	11,189.10	40.11	40.57	-90.51	301.69	-917.11	835.00	754.87	80.13	10.421	
11,300.00	11,289.10	11,307.56	11,289.10	40.47	40.92	-90.51	301.69	-917.11	835.00	754.17	80.83	10.330	
11,400.00	11,389.10	11,407.56	11,389.10	40.82	41.27	-90.51	301.69	-917.11	835.00	753.46	81.54	10.240	
11,443.94	11,433.04	11,451.50	11,433.04	40.98	41.42	-90.51	301.69	-917.11	835.00	753.15	81.85	10.202	
11,450.00	11,439.10	11,457.56	11,439.10	41.00	41.44	-90.51	301.69	-917.11	835.00	753.10	81.89	10.196	
11,500.00	11,489.01	11,507.47	11,489.01	41.16	41.62	-90.33	301.69	-917.11	834.45	752.22	82.22	10.148	
11,550.00	11,538.49	11,556.95	11,538.49	41.31	41.79	-89.85	301.69	-917.11	833.05	750.50	82.55	10.091	
11,600.00	11,587.17	11,605.64	11,587.17	41.45	41.96	-89.08	301.69	-917.11	830.94	748.07	82.87	10.027	
11,650.00	11,634.68	11,653.15	11,634.68	41.58	42.12	-88.03	301.69	-917.11	828.28	745.11	83.17	9.959	
11,700.00	11,680.66	11,701.70	11,680.66	41.70	42.29	-86.73	301.00	-917.10	825.29	741.81	83.47	9.887	
11,750.00	11,724.75	11,753.36	11,734.64	41.81	42.45	-85.44	296.16	-917.07	821.95	738.19	83.76	9.813	
11,800.00	11,766.62	11,807.02	11,787.36	41.91	42.60	-84.23	286.24	-917.00	818.28	734.25	84.02	9.739	
11,850.00	11,805.95	11,862.86	11,840.98	42.00	42.75	-83.16	270.74	-916.90	814.28	730.02	84.26	9.664	
11,900.00	11,842.44	11,921.06	11,894.99	42.09	42.89	-82.27	249.12	-916.76	809.96	725.50	84.46	9.590	
11,950.00	11,875.82	11,981.79	11,948.69	42.17	43.02	-81.61	220.83	-916.57	805.30	720.71	84.60	9.519	
12,000.00	11,905.83	12,045.19	12,001.24	42.25	43.13	-81.26	185.42	-916.34	800.29	715.62	84.67	9.452	
12,050.00	11,932.24	12,111.36	12,051.56	42.34	43.23	-81.26	142.51	-916.06	794.90	710.22	84.68	9.387	
12,100.00	11,954.85	12,180.34	12,098.39	42.44	43.31	-81.66	91.91	-915.72	789.07	704.45	84.62	9.325	
12,150.00	11,973.49	12,252.08	12,140.27	42.53	43.37	-82.49	33.73	-915.34	782.75	698.23	84.51	9.262	
12,200.00	11,988.01	12,326.38	12,175.64	42.63	43.42	-83.78	-31.55	-914.91	775.87	691.48	84.39	9.193	
12,250.00	11,998.31	12,402.95	12,202.94	42.73	43.49	-85.51	-103.02	-914.44	768.39	684.08	84.30	9.115	
12,300.00	12,004.31	12,479.79	12,220.53	42.84	43.63	-87.49	-177.77	-913.95	760.24	675.96	84.29	9.020	
12,343.94	12,006.00	12,535.54	12,228.25	42.93	43.75	-88.43	-232.97	-913.59	753.00	668.68	84.32	8.930	
12,400.00	12,006.00	12,607.38	12,233.43	43.06	43.92	-89.74	-304.61	-913.12	743.89	659.45	84.44	8.810	
12,500.00	12,006.00	12,713.86	12,234.00	43.33	44.22	-90.38	-411.07	-912.42	728.24	643.40	84.84	8.583	
12,600.00	12,006.00	12,812.98	12,234.00	43.66	44.55	-90.38	-510.20	-911.76	715.77	630.41	85.36	8.385	
12,700.00	12,006.00	12,912.51	12,234.00	44.05	44.94	-90.38	-609.72	-911.11	706.60	620.59	86.01	8.216	
12,800.00	12,006.00	13,012.31	12,234.00	44.48	45.38	-90.38	-709.52	-910.45	700.73	613.94	86.78	8.074	
12,900.00	12,006.00	13,112.27	12,234.00	44.96	45.87	-90.38	-809.48	-909.79	698.16	610.47	87.69	7.961	
12,927.79	12,006.00	13,140.06	12,234.00	45.11	46.02	-90.38	-837.27	-909.61	698.03	610.06	87.97	7.935 CC	
12,927.98	12,006.00	13,140.25	12,234.00	45.11	46.02	-90.38	-837.45	-909.61	698.03	610.06	87.97	7.935	
13,000.00	12,006.00	13,212.27	12,234.00	45.50	46.41	-90.38	-909.47	-909.14	698.04	609.32	88.72	7.868	
13,100.00	12,006.00	13,312.27	12,234.00	46.08	47.01	-90.38	-1,009.47	-908.48	698.05	608.19	89.85	7.769	
13,200.00	12,006.00	13,412.27	12,234.00	46.72	47.65	-90.38	-1,109.47	-907.82	698.05	606.97	91.08	7.664	
13,300.00	12,006.00	13,512.27	12,234.00	47.40	48.34	-90.38	-1,209.47	-907.16	698.06	605.66	92.40	7.555	
13,400.00	12,006.00	13,612.27	12,234.00	48.13	49.08	-90.38	-1,309.46	-906.50	698.06	604.26	93.81	7.441	
13,500.00	12,006.00	13,712.27	12,234.00	48.91	49.85	-90.38	-1,409.46	-905.85	698.07	602.77	95.30	7.325	
13,600.00	12,006.00	13,812.27	12,234.00	49.73	50.67	-90.38	-1,509.46	-905.19	698.08	601.20	96.87	7.206	
13,700.00	12,006.00	13,912.27	12,234.00	50.59	51.53	-90.38	-1,609.46	-904.53	698.08	599.56	98.52	7.085	
13,800.00	12,006.00	14,012.27	12,234.00	51.49	52.43	-90.38	-1,709.46	-903.87	698.09	597.84	100.25	6.964	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #201H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference	Offset		Semi Major Axis		Distance								Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
13,900.00	12,006.00	14,112.27	12,234.00	52.42	53.36	-90.38	-1,809.45	-903.21	698.09	596.06	102.04	6.842	
14,000.00	12,006.00	14,212.27	12,234.00	53.39	54.33	-90.38	-1,909.45	-902.56	698.10	594.21	103.89	6.719	
14,100.00	12,006.00	14,312.27	12,234.00	54.39	55.33	-90.38	-2,009.45	-901.90	698.11	592.29	105.81	6.598	
14,200.00	12,006.00	14,412.27	12,234.00	55.43	56.36	-90.38	-2,109.45	-901.24	698.11	590.32	107.79	6.477	
14,300.00	12,006.00	14,512.27	12,234.00	56.49	57.42	-90.38	-2,209.44	-900.58	698.12	588.29	109.83	6.357	
14,400.00	12,006.00	14,612.27	12,234.00	57.58	58.51	-90.38	-2,309.44	-899.93	698.12	586.21	111.91	6.238	
14,500.00	12,006.00	14,712.27	12,234.00	58.70	59.62	-90.38	-2,409.44	-899.27	698.13	584.08	114.05	6.121	
14,600.00	12,006.00	14,812.27	12,234.00	59.84	60.76	-90.38	-2,509.44	-898.61	698.14	581.91	116.23	6.006	
14,700.00	12,006.00	14,912.27	12,234.00	61.01	61.92	-90.38	-2,609.44	-897.95	698.14	579.68	118.46	5.894	
14,800.00	12,006.00	15,012.27	12,234.00	62.19	63.10	-90.38	-2,709.43	-897.29	698.15	577.42	120.73	5.783	
14,900.00	12,006.00	15,112.27	12,234.00	63.40	64.30	-90.38	-2,809.43	-896.64	698.16	575.12	123.04	5.674	
15,000.00	12,006.00	15,212.27	12,234.00	64.63	65.52	-90.38	-2,909.43	-895.98	698.16	572.78	125.38	5.568	
15,100.00	12,006.00	15,312.27	12,234.00	65.88	66.76	-90.38	-3,009.43	-895.32	698.17	570.40	127.77	5.464	
15,200.00	12,006.00	15,412.27	12,234.00	67.14	68.02	-90.38	-3,109.43	-894.66	698.17	567.99	130.18	5.363	
15,300.00	12,006.00	15,512.27	12,234.00	68.42	69.30	-90.38	-3,209.42	-894.00	698.18	565.55	132.63	5.264	
15,400.00	12,006.00	15,612.27	12,234.00	69.72	70.59	-90.38	-3,309.42	-893.35	698.19	563.08	135.10	5.168	
15,500.00	12,006.00	15,712.27	12,234.00	71.03	71.89	-90.38	-3,409.42	-892.69	698.19	560.58	137.61	5.074	
15,600.00	12,006.00	15,812.27	12,234.00	72.35	73.21	-90.38	-3,509.42	-892.03	698.20	558.06	140.14	4.982	
15,700.00	12,006.00	15,912.27	12,234.00	73.69	74.54	-90.38	-3,609.41	-891.37	698.20	555.51	142.70	4.893	
15,800.00	12,006.00	16,012.27	12,234.00	75.04	75.89	-90.38	-3,709.41	-890.71	698.21	552.93	145.28	4.806	
15,900.00	12,006.00	16,112.27	12,234.00	76.41	77.24	-90.38	-3,809.41	-890.06	698.22	550.33	147.88	4.721	
16,000.00	12,006.00	16,212.27	12,234.00	77.78	78.61	-90.38	-3,909.41	-889.40	698.22	547.71	150.51	4.639	
16,100.00	12,006.00	16,312.27	12,234.00	79.16	79.99	-90.38	-4,009.41	-888.74	698.23	545.07	153.15	4.559	
16,200.00	12,006.00	16,412.27	12,234.00	80.56	81.38	-90.38	-4,109.40	-888.08	698.23	542.42	155.82	4.481	
16,300.00	12,006.00	16,512.27	12,234.00	81.96	82.78	-90.38	-4,209.40	-887.42	698.24	539.74	158.50	4.405	
16,400.00	12,006.00	16,612.27	12,234.00	83.38	84.19	-90.38	-4,309.40	-886.77	698.25	537.04	161.20	4.331	
16,500.00	12,006.00	16,712.27	12,234.00	84.80	85.60	-90.38	-4,409.40	-886.11	698.25	534.33	163.92	4.260	
16,600.00	12,006.00	16,812.27	12,234.00	86.23	87.03	-90.38	-4,509.40	-885.45	698.26	531.60	166.65	4.190	
16,700.00	12,006.00	16,912.27	12,234.00	87.67	88.46	-90.38	-4,609.39	-884.79	698.26	528.86	169.40	4.122	
16,778.77	12,006.00	16,991.04	12,234.00	88.80	89.59	-90.38	-4,688.16	-884.27	698.27	526.69	171.58	4.070	
16,779.28	12,006.00	16,991.22	12,234.00	88.82	89.60	-90.35	-4,688.35	-884.27	698.27	526.68	171.59	4.070 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #202H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference													
Offset				Semi Major Axis			Distance						Warning:
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.00	0.00	0.00	0.00	0.00	0.00	-90.40	-0.21	-30.00	30.00				
100.00	100.00	100.00	100.00	0.13	0.13	-90.40	-0.21	-30.00	30.00	29.75	0.26	117.054	
200.00	200.00	200.00	200.00	0.49	0.49	-90.40	-0.21	-30.00	30.00	29.03	0.97	30.826	
300.00	300.00	300.00	300.00	0.85	0.85	-90.40	-0.21	-30.00	30.00	28.31	1.69	17.750	
400.00	400.00	400.00	400.00	1.20	1.20	-90.40	-0.21	-30.00	30.00	27.59	2.41	12.464	
500.00	500.00	500.00	500.00	1.56	1.56	-90.40	-0.21	-30.00	30.00	26.88	3.12	9.603	
600.00	600.00	600.00	600.00	1.92	1.92	-90.40	-0.21	-30.00	30.00	26.16	3.84	7.811	
700.00	700.00	700.42	700.41	2.28	2.28	-89.40	0.31	-29.29	29.29	24.74	4.56	6.430	
800.00	800.00	800.77	800.73	2.64	2.63	-86.10	1.85	-27.15	27.23	21.96	5.27	5.169	
900.00	900.00	901.01	900.87	3.00	2.99	-79.37	4.43	-23.60	24.03	18.05	5.98	4.018	
1,000.00	1,000.00	1,001.05	1,000.73	3.35	3.35	-66.71	8.02	-18.64	20.31	13.61	6.70	3.032	
1,100.00	1,100.00	1,100.81	1,100.24	3.71	3.71	-47.08	12.10	-13.01	17.77	10.35	7.42	2.395	
1,149.41	1,149.41	1,150.10	1,149.41	3.89	3.89	-35.94	14.12	-10.23	17.44	9.66	7.78	2.242 CC	
1,200.00	1,200.00	1,200.57	1,199.75	4.07	4.07	-24.54	16.18	-7.39	17.79	9.64	8.14	2.184 ES, SF	
1,300.00	1,299.99	1,300.34	1,299.29	4.43	4.44	-4.52	20.26	-1.76	19.49	10.63	8.86	2.200	
1,400.00	1,399.96	1,400.13	1,398.83	4.79	4.80	12.81	24.34	3.87	21.53	11.96	9.57	2.250	
1,500.00	1,499.86	1,499.90	1,498.36	5.15	5.17	28.93	28.42	9.50	23.85	13.57	10.28	2.321	
1,600.00	1,599.68	1,599.62	1,597.84	5.51	5.54	44.54	32.50	15.12	26.73	15.75	10.98	2.434	
1,600.23	1,599.90	1,599.85	1,598.07	5.51	5.54	44.58	32.51	15.14	26.74	15.76	10.98	2.435	
1,700.00	1,699.43	1,699.31	1,697.28	5.87	5.91	57.97	36.57	20.75	30.89	19.19	11.70	2.641	
1,800.00	1,799.19	1,799.00	1,796.73	6.23	6.28	67.82	40.65	26.37	36.30	23.88	12.42	2.924	
1,900.00	1,898.94	1,898.69	1,896.18	6.59	6.65	74.96	44.73	31.99	42.50	29.35	13.14	3.234	
2,000.00	1,998.70	1,998.37	1,995.62	6.95	7.02	80.23	48.80	37.62	49.18	35.31	13.87	3.546	
2,100.00	2,098.46	2,098.06	2,095.07	7.32	7.39	84.20	52.88	43.24	56.17	41.57	14.60	3.847	
2,200.00	2,198.21	2,197.75	2,194.52	7.69	7.76	87.29	56.95	48.86	63.38	48.05	15.33	4.134	
2,300.00	2,297.97	2,297.44	2,293.96	8.05	8.13	89.74	61.03	54.49	70.73	54.67	16.06	4.404	
2,400.00	2,397.72	2,397.13	2,393.41	8.42	8.50	91.72	65.11	60.11	78.19	61.39	16.79	4.656	
2,500.00	2,497.48	2,496.82	2,492.85	8.79	8.87	93.36	69.18	65.73	85.72	68.20	17.53	4.891	
2,600.00	2,597.24	2,596.50	2,592.30	9.16	9.24	94.73	73.26	71.36	93.31	75.05	18.26	5.111	
2,700.00	2,696.99	2,696.19	2,691.75	9.52	9.61	95.90	77.34	76.98	100.95	81.96	18.99	5.316	
2,800.00	2,796.75	2,795.88	2,791.19	9.89	9.98	96.90	81.41	82.60	108.62	88.90	19.72	5.507	
2,900.00	2,896.50	2,895.57	2,890.64	10.26	10.35	97.76	85.49	88.23	116.32	95.87	20.46	5.686	
3,000.00	2,996.26	2,995.26	2,990.09	10.63	10.72	98.52	89.56	93.85	124.05	102.86	21.19	5.854	
3,100.00	3,096.02	3,094.95	3,089.53	11.00	11.09	99.19	93.64	99.47	131.79	109.87	21.92	6.012	
3,200.00	3,195.77	3,194.64	3,188.98	11.37	11.46	99.79	97.72	105.10	139.55	116.90	22.66	6.160	
3,300.00	3,295.53	3,294.32	3,288.42	11.74	11.84	100.32	101.79	110.72	147.33	123.94	23.39	6.299	
3,400.00	3,395.29	3,394.01	3,387.87	12.11	12.21	100.80	105.87	116.34	155.11	130.99	24.12	6.430	
3,500.00	3,495.04	3,493.70	3,487.32	12.48	12.58	101.24	109.94	121.97	162.91	138.05	24.86	6.554	
3,600.00	3,594.80	3,593.39	3,586.76	12.85	12.95	101.63	114.02	127.59	170.71	145.12	25.59	6.671	
3,700.00	3,694.55	3,693.08	3,686.21	13.22	13.32	101.99	118.10	133.21	178.52	152.20	26.33	6.781	
3,800.00	3,794.31	3,792.77	3,785.65	13.59	13.69	102.32	122.17	138.84	186.34	159.28	27.06	6.886	
3,900.00	3,894.07	3,892.45	3,885.10	13.96	14.07	102.62	126.25	144.46	194.16	166.37	27.79	6.986	
4,000.00	3,993.82	3,992.14	3,984.55	14.34	14.44	102.90	130.32	150.08	201.99	173.46	28.53	7.080	
4,100.00	4,093.58	4,091.83	4,083.99	14.71	14.81	103.16	134.40	155.71	209.83	180.56	29.26	7.170	
4,200.00	4,193.33	4,191.52	4,183.44	15.08	15.18	103.40	138.48	161.33	217.66	187.66	30.00	7.256	
4,300.00	4,293.09	4,291.21	4,282.89	15.45	15.55	103.62	142.55	166.95	225.50	194.77	30.73	7.337	
4,400.00	4,392.85	4,390.90	4,382.33	15.82	15.92	103.83	146.63	172.58	233.35	201.88	31.47	7.415	
4,500.00	4,492.60	4,490.58	4,481.78	16.19	16.30	104.03	150.71	178.20	241.19	208.99	32.20	7.490	
4,600.00	4,592.36	4,590.27	4,581.22	16.56	16.67	104.21	154.78	183.82	249.04	216.10	32.94	7.561	
4,700.00	4,692.12	4,689.96	4,680.67	16.94	17.04	104.38	158.86	189.45	256.89	223.22	33.67	7.629	
4,800.00	4,791.87	4,789.65	4,780.12	17.31	17.41	104.54	162.93	195.07	264.75	230.34	34.41	7.694	
4,900.00	4,891.63	4,889.34	4,879.56	17.68	17.78	104.69	167.01	200.69	272.60	237.46	35.14	7.757	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #202H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Distance							Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	Offset Wellbore Centre +E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
5,000.00	4,991.38	4,989.03	4,979.01	18.05	18.16	104.84	171.09	206.32	280.46	244.58	35.88	7.817		
5,100.00	5,091.14	5,088.72	5,078.46	18.42	18.53	104.97	175.16	211.94	288.32	251.70	36.61	7.875		
5,200.00	5,190.90	5,188.40	5,177.90	18.79	18.90	105.10	179.24	217.56	296.18	258.83	37.35	7.930		
5,300.00	5,290.65	5,288.09	5,277.35	19.17	19.27	105.22	183.31	223.19	304.04	265.96	38.08	7.983		
5,400.00	5,390.41	5,387.78	5,376.79	19.54	19.65	105.34	187.39	228.81	311.90	273.08	38.82	8.035		
5,500.00	5,490.16	5,487.47	5,476.24	19.91	20.02	105.45	191.47	234.43	319.77	280.21	39.55	8.084		
5,600.00	5,589.92	5,587.16	5,575.69	20.28	20.39	105.55	195.54	240.06	327.63	287.34	40.29	8.132		
5,700.00	5,689.68	5,686.85	5,675.13	20.65	20.76	105.65	199.62	245.68	335.50	294.47	41.03	8.178		
5,800.00	5,789.43	5,786.53	5,774.58	21.03	21.13	105.75	203.70	251.30	343.37	301.61	41.76	8.222		
5,849.08	5,838.40	5,835.47	5,823.39	21.21	21.32	105.79	205.70	254.06	347.23	305.11	42.12	8.243		
5,900.00	5,889.21	5,886.24	5,874.04	21.40	21.51	105.79	207.77	256.93	351.06	308.57	42.49	8.261		
6,000.00	5,989.11	5,986.01	5,973.57	21.76	21.88	105.52	211.85	262.55	357.60	314.37	43.22	8.273		
6,100.00	6,089.10	6,085.79	6,073.11	22.11	22.25	104.89	215.93	268.18	362.84	318.90	43.94	8.257		
6,115.90	6,105.00	6,101.65	6,088.93	22.17	22.31	104.76	216.58	269.08	363.56	319.50	44.06	8.252		
6,200.00	6,189.10	6,185.55	6,172.62	22.46	22.62	104.05	220.01	273.81	367.30	322.65	44.66	8.225		
6,300.00	6,289.10	6,285.30	6,272.14	22.81	23.00	103.23	224.09	279.44	371.82	326.46	45.37	8.196		
6,400.00	6,389.10	6,385.06	6,371.65	23.16	23.37	102.43	228.17	285.07	376.42	330.34	46.08	8.169		
6,500.00	6,489.10	6,484.82	6,471.16	23.51	23.74	101.65	232.25	290.69	381.09	334.30	46.79	8.144		
6,600.00	6,589.10	6,584.57	6,570.68	23.86	24.11	100.89	236.33	296.32	385.83	338.33	47.51	8.122		
6,700.00	6,689.10	6,684.33	6,670.19	24.21	24.49	100.14	240.40	301.95	390.64	342.42	48.22	8.101		
6,800.00	6,789.10	6,784.09	6,769.71	24.56	24.86	99.42	244.48	307.57	395.51	346.58	48.93	8.083		
6,900.00	6,889.10	6,883.84	6,869.22	24.91	25.23	98.71	248.56	313.20	400.44	350.80	49.64	8.066		
7,000.00	6,989.10	6,983.60	6,968.74	25.26	25.60	98.02	252.64	318.83	405.43	355.08	50.36	8.051		
7,100.00	7,089.10	7,083.36	7,068.25	25.61	25.98	97.34	256.72	324.46	410.48	359.42	51.07	8.038		
7,200.00	7,189.10	7,183.12	7,167.77	25.96	26.35	96.69	260.80	330.08	415.59	363.81	51.78	8.026		
7,300.00	7,289.10	7,282.87	7,267.28	26.31	26.72	96.04	264.88	335.71	420.75	368.26	52.49	8.016		
7,400.00	7,389.10	7,382.63	7,366.80	26.67	27.09	95.42	268.96	341.34	425.96	372.75	53.20	8.006		
7,500.00	7,489.10	7,482.39	7,466.31	27.02	27.47	94.81	273.04	346.96	431.22	377.30	53.92	7.998		
7,600.00	7,589.10	7,582.14	7,565.83	27.37	27.84	94.21	277.12	352.59	436.52	381.90	54.63	7.991		
7,700.00	7,689.10	7,681.90	7,665.34	27.72	28.21	93.63	281.19	358.22	441.88	386.54	55.34	7.985		
7,800.00	7,789.10	7,781.66	7,764.85	28.07	28.58	93.06	285.27	363.85	447.28	391.23	56.05	7.980		
7,900.00	7,889.10	7,881.42	7,864.37	28.43	28.96	92.51	289.35	369.47	452.72	395.95	56.76	7.976		
8,000.00	7,989.10	7,981.17	7,963.88	28.78	29.33	91.96	293.43	375.10	458.20	400.72	57.47	7.972		
8,100.00	8,089.10	8,080.93	8,063.40	29.13	29.70	91.44	297.51	380.73	463.72	405.53	58.19	7.970		
8,200.00	8,189.10	8,180.69	8,162.91	29.48	30.07	90.92	301.59	386.35	469.28	410.38	58.90	7.968		
8,300.00	8,289.10	8,280.44	8,262.43	29.84	30.45	90.42	305.67	391.98	474.88	415.27	59.61	7.966		
8,400.00	8,389.10	8,385.10	8,366.85	30.19	30.84	89.92	309.77	397.64	480.29	419.94	60.36	7.958		
8,500.00	8,489.10	8,486.43	8,478.07	30.54	31.24	89.59	312.55	401.48	483.75	422.63	61.12	7.915		
8,600.00	8,589.10	8,607.94	8,589.57	30.90	31.63	89.49	313.43	402.69	484.84	422.99	61.86	7.838		
8,632.02	8,621.12	8,639.49	8,621.12	31.01	31.73	89.49	313.43	402.69	484.84	422.77	62.08	7.810		
8,700.00	8,689.10	8,707.46	8,689.10	31.25	31.97	89.49	313.43	402.69	484.84	422.29	62.55	7.751		
8,800.00	8,789.10	8,807.46	8,789.10	31.60	32.31	89.49	313.43	402.69	484.84	421.59	63.25	7.665		
8,900.00	8,889.10	8,907.46	8,889.10	31.96	32.65	89.49	313.43	402.69	484.84	420.89	63.95	7.581		
9,000.00	8,989.10	9,007.46	8,989.10	32.31	32.99	89.49	313.43	402.69	484.84	420.19	64.65	7.499		
9,100.00	9,089.10	9,107.46	9,089.10	32.66	33.33	89.49	313.43	402.69	484.84	419.49	65.35	7.419		
9,200.00	9,189.10	9,207.46	9,189.10	33.02	33.67	89.49	313.43	402.69	484.84	418.79	66.05	7.340		
9,300.00	9,289.10	9,307.46	9,289.10	33.37	34.02	89.49	313.43	402.69	484.84	418.09	66.75	7.263		
9,400.00	9,389.10	9,407.46	9,389.10	33.73	34.36	89.49	313.43	402.69	484.84	417.39	67.46	7.188		
9,500.00	9,489.10	9,507.46	9,489.10	34.08	34.70	89.49	313.43	402.69	484.84	416.69	68.16	7.114		
9,600.00	9,589.10	9,607.46	9,589.10	34.43	35.04	89.49	313.43	402.69	484.84	415.98	68.86	7.041		
9,700.00	9,689.10	9,707.46	9,689.10	34.79	35.39	89.49	313.43	402.69	484.84	415.28	69.56	6.970		
9,800.00	9,789.10	9,807.46	9,789.10	35.14	35.73	89.49	313.43	402.69	484.84	414.58	70.27	6.900		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design: Charles Ling Fed Com - Charles Ling Fed Com #202H - Wellbore #1 - Design #1											Offset Site Error: 0.00 usft		
Survey Program: 0-MWD											Offset Well Error: 0.00 usft		
Reference		Offset		Semi-Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,900.00	9,889.10	9,907.46	9,889.10	35.50	36.08	89.49	313.43	402.69	484.84	413.88	70.97	6.832	
10,000.00	9,989.10	10,007.46	9,989.10	35.85	36.42	89.49	313.43	402.69	484.84	413.17	71.67	6.765	
10,100.00	10,089.10	10,107.46	10,089.10	36.21	36.77	89.49	313.43	402.69	484.84	412.47	72.37	6.699	
10,200.00	10,189.10	10,207.46	10,189.10	36.56	37.11	89.49	313.43	402.69	484.84	411.77	73.08	6.635	
10,300.00	10,289.10	10,307.46	10,289.10	36.92	37.46	89.49	313.43	402.69	484.84	411.06	73.78	6.571	
10,400.00	10,389.10	10,407.46	10,389.10	37.27	37.80	89.49	313.43	402.69	484.84	410.36	74.49	6.509	
10,500.00	10,489.10	10,507.46	10,489.10	37.63	38.15	89.49	313.43	402.69	484.84	409.65	75.19	6.448	
10,600.00	10,589.10	10,607.46	10,589.10	37.98	38.49	89.49	313.43	402.69	484.84	408.95	75.90	6.388	
10,700.00	10,689.10	10,707.46	10,689.10	38.34	38.84	89.49	313.43	402.69	484.84	408.24	76.60	6.329	
10,800.00	10,789.10	10,807.46	10,789.10	38.69	39.19	89.49	313.43	402.69	484.84	407.54	77.31	6.272	
10,900.00	10,889.10	10,907.46	10,889.10	39.05	39.53	89.49	313.43	402.69	484.84	406.83	78.01	6.215	
11,000.00	10,989.10	11,007.46	10,989.10	39.40	39.88	89.49	313.43	402.69	484.84	406.13	78.72	6.159	
11,100.00	11,089.10	11,107.46	11,089.10	39.76	40.23	89.49	313.43	402.69	484.84	405.42	79.42	6.105	
11,200.00	11,189.10	11,207.46	11,189.10	40.11	40.57	89.49	313.43	402.69	484.84	404.71	80.13	6.051	
11,300.00	11,289.10	11,307.46	11,289.10	40.47	40.92	89.49	313.43	402.69	484.84	404.01	80.84	5.998	
11,400.00	11,389.10	11,407.46	11,389.10	40.82	41.27	89.49	313.43	402.69	484.84	403.30	81.54	5.946	
11,443.94	11,433.04	11,451.41	11,433.04	40.98	41.42	89.49	313.43	402.69	484.84	402.99	81.85	5.923	
11,450.00	11,439.10	11,457.46	11,439.10	41.00	41.44	89.49	313.43	402.69	484.85	402.96	81.89	5.920	
11,500.00	11,489.01	11,507.38	11,489.01	41.16	41.62	89.17	313.43	402.69	485.41	403.19	82.22	5.904	
11,550.00	11,538.49	11,556.86	11,538.49	41.31	41.79	88.36	313.43	402.69	486.94	404.40	82.54	5.900	
11,600.00	11,587.17	11,605.54	11,587.17	41.45	41.96	87.07	313.43	402.69	489.60	406.77	82.84	5.910	
11,650.00	11,634.68	11,654.12	11,635.75	41.58	42.12	85.35	313.19	402.69	493.63	410.52	83.12	5.939	
11,700.00	11,680.66	11,705.41	11,686.88	41.70	42.28	83.62	309.42	402.71	499.01	415.64	83.37	5.985	
11,750.00	11,724.75	11,758.28	11,739.02	41.81	42.44	82.05	300.77	402.77	505.61	422.01	83.60	6.048	
11,800.00	11,766.62	11,812.82	11,791.74	41.91	42.59	80.71	286.85	402.86	513.32	429.54	83.78	6.127	
11,850.00	11,805.95	11,869.15	11,844.53	42.00	42.73	79.66	267.28	402.98	522.03	438.13	83.91	6.221	
11,900.00	11,842.44	11,927.32	11,896.76	42.09	42.85	78.95	241.73	403.14	531.60	447.63	83.97	6.331	
11,950.00	11,875.82	11,987.41	11,947.71	42.17	42.97	78.61	209.93	403.34	541.87	457.90	83.97	6.453	
12,000.00	11,905.83	12,049.44	11,996.51	42.25	43.07	78.68	171.69	403.59	552.67	468.78	83.90	6.587	
12,050.00	11,932.24	12,113.42	12,042.21	42.34	43.15	79.17	126.96	403.87	563.85	480.08	83.78	6.731	
12,100.00	11,954.85	12,179.28	12,083.75	42.44	43.22	80.08	75.90	404.19	575.24	491.61	83.63	6.879	
12,150.00	11,973.49	12,246.92	12,120.03	42.53	43.27	81.39	18.86	404.55	586.67	503.19	83.48	7.028	
12,200.00	11,988.01	12,316.16	12,149.93	42.63	43.31	83.06	-43.54	404.95	598.00	514.62	83.38	7.172	
12,250.00	11,998.31	12,386.75	12,172.45	42.73	43.39	85.02	-110.40	405.37	609.07	525.72	83.35	7.307	
12,300.00	12,004.31	12,455.08	12,186.37	42.84	43.52	86.86	-177.26	405.79	619.83	536.38	83.44	7.428	
12,343.94	12,006.00	12,508.33	12,193.19	42.93	43.64	87.84	-230.06	406.13	629.44	545.88	83.56	7.533	
12,400.00	12,006.00	12,576.86	12,197.61	43.06	43.81	89.12	-298.43	406.56	640.80	557.01	83.79	7.648	
12,500.00	12,006.00	12,680.98	12,198.00	43.33	44.11	89.64	-402.55	407.22	656.73	572.33	84.39	7.782	
12,600.00	12,006.00	12,780.11	12,198.00	43.66	44.44	89.64	-501.67	407.85	669.29	584.21	85.08	7.867	
12,700.00	12,006.00	12,879.64	12,198.00	44.05	44.83	89.64	-601.20	408.48	678.55	592.70	85.85	7.904	
12,800.00	12,006.00	12,979.44	12,198.00	44.48	45.27	89.64	-701.00	409.11	684.47	597.76	86.71	7.894	
12,900.00	12,006.00	13,079.40	12,198.00	44.96	45.77	89.64	-800.96	409.74	687.05	599.40	87.65	7.838	
12,927.98	12,006.00	13,107.38	12,198.00	45.11	45.91	89.64	-828.94	409.92	687.18	599.25	87.93	7.815	
13,000.00	12,006.00	13,179.40	12,198.00	45.50	46.32	89.64	-900.96	410.38	687.16	598.47	88.69	7.748	
13,100.00	12,006.00	13,279.40	12,198.00	46.08	46.91	89.64	-1,000.95	411.01	687.13	597.31	89.82	7.650	
13,200.00	12,006.00	13,379.40	12,198.00	46.72	47.56	89.64	-1,100.95	411.64	687.10	596.04	91.05	7.546	
13,300.00	12,006.00	13,479.40	12,198.00	47.40	48.25	89.64	-1,200.95	412.27	687.06	594.68	92.38	7.437	
13,400.00	12,006.00	13,579.40	12,198.00	48.13	48.99	89.64	-1,300.95	412.91	687.03	593.23	93.80	7.324	
13,500.00	12,006.00	13,679.40	12,198.00	48.91	49.77	89.64	-1,400.95	413.54	687.00	591.70	95.31	7.208	
13,600.00	12,006.00	13,779.40	12,198.00	49.73	50.60	89.64	-1,500.94	414.17	686.97	590.08	96.89	7.090	
13,700.00	12,006.00	13,879.40	12,198.00	50.59	51.46	89.64	-1,600.94	414.81	686.94	588.38	98.56	6.970	
13,800.00	12,006.00	13,979.40	12,198.00	51.49	52.36	89.64	-1,700.94	415.44	686.91	586.61	100.30	6.849	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design: Charles Ling Fed Com - Charles Ling Fed Com #202H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi-Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
13,900.00	12,006.00	14,079.40	12,198.00	52.42	53.30	89.64	-1,800.94	416.07	686.88	584.77	102.11	6.727	
14,000.00	12,006.00	14,179.40	12,198.00	53.39	54.27	89.64	-1,900.94	416.70	686.85	582.86	103.99	6.605	
14,100.00	12,006.00	14,279.40	12,198.00	54.39	55.27	89.64	-2,000.93	417.34	686.82	580.89	105.93	6.484	
14,200.00	12,006.00	14,379.40	12,198.00	55.43	56.30	89.64	-2,100.93	417.97	686.79	578.86	107.93	6.363	
14,300.00	12,006.00	14,479.40	12,198.00	56.49	57.36	89.64	-2,200.93	418.60	686.76	576.77	109.99	6.244	
14,400.00	12,006.00	14,579.40	12,198.00	57.58	58.45	89.64	-2,300.93	419.24	686.73	574.63	112.11	6.126	
14,500.00	12,006.00	14,679.40	12,198.00	58.70	59.57	89.64	-2,400.93	419.87	686.70	572.43	114.27	6.010	
14,600.00	12,006.00	14,779.40	12,198.00	59.84	60.70	89.64	-2,500.92	420.50	686.67	570.19	116.48	5.895	
14,700.00	12,006.00	14,879.40	12,198.00	61.01	61.87	89.64	-2,600.92	421.13	686.64	567.90	118.74	5.783	
14,800.00	12,006.00	14,979.40	12,198.00	62.19	63.05	89.64	-2,700.92	421.77	686.61	565.58	121.04	5.673	
14,900.00	12,006.00	15,079.40	12,198.00	63.40	64.26	89.64	-2,800.92	422.40	686.58	563.21	123.37	5.565	
15,000.00	12,006.00	15,179.40	12,198.00	64.63	65.48	89.64	-2,900.92	423.03	686.55	560.80	125.75	5.460	
15,100.00	12,006.00	15,279.40	12,198.00	65.88	66.72	89.64	-3,000.91	423.67	686.52	558.36	128.16	5.357	
15,200.00	12,006.00	15,379.40	12,198.00	67.14	67.98	89.64	-3,100.91	424.30	686.49	555.88	130.61	5.256	
15,300.00	12,006.00	15,479.40	12,198.00	68.42	69.26	89.64	-3,200.91	424.93	686.46	553.37	133.09	5.158	
15,400.00	12,006.00	15,579.40	12,198.00	69.72	70.55	89.64	-3,300.91	425.56	686.43	550.83	135.60	5.062	
15,500.00	12,006.00	15,679.40	12,198.00	71.03	71.86	89.64	-3,400.91	426.20	686.40	548.26	138.14	4.969	
15,600.00	12,006.00	15,779.40	12,198.00	72.35	73.18	89.64	-3,500.90	426.83	686.37	545.67	140.70	4.878	
15,700.00	12,006.00	15,879.40	12,198.00	73.69	74.51	89.64	-3,600.90	427.46	686.34	543.04	143.29	4.790	
15,800.00	12,006.00	15,979.40	12,198.00	75.04	75.86	89.64	-3,700.90	428.10	686.31	540.40	145.91	4.704	
15,900.00	12,006.00	16,079.40	12,198.00	76.41	77.22	89.64	-3,800.90	428.73	686.28	537.73	148.55	4.620	
16,000.00	12,006.00	16,179.40	12,198.00	77.78	78.59	89.64	-3,900.90	429.36	686.25	535.04	151.21	4.538	
16,100.00	12,006.00	16,279.40	12,198.00	79.16	79.97	89.64	-4,000.89	430.00	686.22	532.33	153.89	4.459	
16,200.00	12,006.00	16,379.40	12,198.00	80.56	81.36	89.64	-4,100.89	430.63	686.19	529.60	156.59	4.382	
16,300.00	12,006.00	16,479.40	12,198.00	81.96	82.76	89.64	-4,200.89	431.26	686.16	526.85	159.30	4.307	
16,400.00	12,006.00	16,579.40	12,198.00	83.38	84.17	89.64	-4,300.89	431.89	686.13	524.09	162.04	4.234	
16,500.00	12,006.00	16,679.40	12,198.00	84.80	85.59	89.64	-4,400.89	432.53	686.10	521.30	164.79	4.163	
16,600.00	12,006.00	16,779.40	12,198.00	86.23	87.01	89.64	-4,500.88	433.16	686.07	518.50	167.56	4.094	
16,700.00	12,006.00	16,879.40	12,198.00	87.67	88.45	89.64	-4,600.88	433.79	686.04	515.69	170.35	4.027	
16,770.02	12,006.00	16,949.42	12,198.00	88.68	89.45	89.64	-4,670.90	434.24	686.01	513.71	172.30	3.981	
16,778.77	12,006.00	16,957.82	12,198.00	88.80	89.57	89.61	-4,679.30	434.29	686.01	513.47	172.54	3.976	
16,779.28	12,006.00	16,957.82	12,198.00	88.82	89.57	89.56	-4,679.30	434.29	686.01	513.46	172.55	3.976	



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #211H - Wellbore #1 - Design #1											Offset Site Error: 0.00 usft		
Survey Program: 0-MWD											Offset Well Error: 0.00 usft		
Reference		Offset		Semi Major Axis			Distance					Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		Separation Factor
0.00	0.00	0.00	0.00	0.00	0.00	-90.50	-12.11	-1,379.71	1,379.76				
100.00	100.00	99.00	99.00	0.13	0.13	-90.50	-12.11	-1,379.71	1,379.76	1,379.51	0.26	5,410.285	
200.00	200.00	199.00	199.00	0.49	0.48	-90.50	-12.11	-1,379.71	1,379.76	1,378.79	0.97	1,422.926	
300.00	300.00	299.00	299.00	0.85	0.84	-90.50	-12.11	-1,379.71	1,379.76	1,378.08	1.69	818.069	
400.00	400.00	399.00	399.00	1.20	1.20	-90.50	-12.11	-1,379.71	1,379.76	1,377.36	2.40	574.052	
500.00	500.00	499.00	499.00	1.56	1.56	-90.50	-12.11	-1,379.71	1,379.76	1,376.64	3.12	442.162	
600.00	600.00	599.00	599.00	1.92	1.92	-90.50	-12.11	-1,379.71	1,379.76	1,375.93	3.84	359.553 CC	
700.00	700.00	687.75	687.75	2.28	2.23	-90.48	-11.55	-1,380.07	1,380.17	1,375.65	4.51	305.839	
800.00	800.00	776.35	776.32	2.64	2.55	-90.41	-9.83	-1,381.17	1,381.39	1,376.21	5.19	266.340	
900.00	900.00	864.86	864.77	3.00	2.87	-90.29	-6.96	-1,383.01	1,383.45	1,377.59	5.86	236.068	
1,000.00	1,000.00	953.25	953.02	3.35	3.19	-90.12	-2.95	-1,385.58	1,386.35	1,379.81	6.53	212.157	
1,100.00	1,100.00	1,046.88	1,046.45	3.71	3.52	-89.90	2.40	-1,389.00	1,390.00	1,382.77	7.23	192.276	
1,200.00	1,200.00	1,146.64	1,145.96	4.07	3.89	-89.66	8.26	-1,392.76	1,393.79	1,385.84	7.95	175.359	
1,300.00	1,299.99	1,246.45	1,245.52	4.43	4.25	-89.46	14.12	-1,396.51	1,397.38	1,388.71	8.67	161.216	
1,400.00	1,399.96	1,346.34	1,345.18	4.79	4.62	-89.32	20.00	-1,400.27	1,400.51	1,391.12	9.39	149.174	
1,500.00	1,499.86	1,446.29	1,444.88	5.15	4.99	-89.25	25.87	-1,404.04	1,403.18	1,393.07	10.11	138.787	
1,600.00	1,599.68	1,546.27	1,544.61	5.51	5.36	-89.26	31.75	-1,407.80	1,405.38	1,394.54	10.83	129.719	
1,600.23	1,599.90	1,546.50	1,544.84	5.51	5.36	-89.26	31.76	-1,407.81	1,405.38	1,394.54	10.84	129.699	
1,700.00	1,699.43	1,646.25	1,644.35	5.87	5.72	-89.29	37.62	-1,411.56	1,407.33	1,395.77	11.56	121.742	
1,800.00	1,799.19	1,746.22	1,744.08	6.23	6.09	-89.33	43.50	-1,415.33	1,409.29	1,397.01	12.29	114.691	
1,900.00	1,898.94	1,846.20	1,843.81	6.59	6.46	-89.36	49.37	-1,419.09	1,411.25	1,398.24	13.02	108.416	
2,000.00	1,998.70	1,946.18	1,943.54	6.95	6.83	-89.40	55.25	-1,422.85	1,413.22	1,399.47	13.75	102.797	
2,100.00	2,098.46	2,046.15	2,043.28	7.32	7.21	-89.44	61.13	-1,426.62	1,415.18	1,400.70	14.48	97.738	
2,200.00	2,198.21	2,146.13	2,143.01	7.69	7.58	-89.47	67.00	-1,430.38	1,417.14	1,401.93	15.21	93.160	
2,300.00	2,297.97	2,246.11	2,242.74	8.05	7.95	-89.51	72.88	-1,434.14	1,419.10	1,403.16	15.95	88.998	
2,400.00	2,397.72	2,346.08	2,342.48	8.42	8.32	-89.54	78.75	-1,437.91	1,421.07	1,404.39	16.68	85.198	
2,500.00	2,497.48	2,446.06	2,442.21	8.79	8.69	-89.58	84.63	-1,441.67	1,423.03	1,405.61	17.41	81.716	
2,600.00	2,597.24	2,546.04	2,541.94	9.16	9.06	-89.62	90.51	-1,445.43	1,424.99	1,406.84	18.15	78.514	
2,700.00	2,696.99	2,646.01	2,641.67	9.52	9.43	-89.65	96.38	-1,449.20	1,426.96	1,408.07	18.89	75.559	
2,800.00	2,796.75	2,745.99	2,741.41	9.89	9.81	-89.69	102.26	-1,452.96	1,428.92	1,409.30	19.62	72.824	
2,900.00	2,896.50	2,845.97	2,841.14	10.26	10.18	-89.72	108.13	-1,456.72	1,430.89	1,410.53	20.36	70.285	
3,000.00	2,996.26	2,945.94	2,940.87	10.63	10.55	-89.76	114.01	-1,460.49	1,432.86	1,411.76	21.10	67.923	
3,100.00	3,096.02	3,045.92	3,040.61	11.00	10.92	-89.79	119.89	-1,464.25	1,434.82	1,412.99	21.83	65.719	
3,200.00	3,195.77	3,145.90	3,140.34	11.37	11.30	-89.83	125.76	-1,468.01	1,436.79	1,414.22	22.57	63.659	
3,300.00	3,295.53	3,245.87	3,240.07	11.74	11.67	-89.86	131.64	-1,471.78	1,438.76	1,415.45	23.31	61.728	
3,400.00	3,395.29	3,345.85	3,339.81	12.11	12.04	-89.90	137.51	-1,475.54	1,440.73	1,416.68	24.05	59.915	
3,500.00	3,495.04	3,445.83	3,439.54	12.48	12.41	-89.93	143.39	-1,479.30	1,442.70	1,417.91	24.78	58.210	
3,600.00	3,594.80	3,545.80	3,539.27	12.85	12.79	-89.97	149.27	-1,483.07	1,444.67	1,419.14	25.52	56.602	
3,700.00	3,694.55	3,645.78	3,639.00	13.22	13.16	-90.00	155.14	-1,486.83	1,446.64	1,420.37	26.26	55.085	
3,800.00	3,794.31	3,745.76	3,738.74	13.59	13.53	-90.03	161.02	-1,490.59	1,448.61	1,421.61	27.00	53.651	
3,900.00	3,894.07	3,845.74	3,838.47	13.96	13.90	-90.07	166.89	-1,494.36	1,450.58	1,422.84	27.74	52.292	
4,000.00	3,993.82	3,945.71	3,938.20	14.34	14.28	-90.10	172.77	-1,498.12	1,452.55	1,424.07	28.48	51.004	
4,100.00	4,093.58	4,045.69	4,037.94	14.71	14.65	-90.14	178.65	-1,501.88	1,454.52	1,425.30	29.22	49.781	
4,200.00	4,193.33	4,145.67	4,137.67	15.08	15.02	-90.17	184.52	-1,505.65	1,456.50	1,426.54	29.96	48.618	
4,300.00	4,293.09	4,245.64	4,237.40	15.45	15.39	-90.21	190.40	-1,509.41	1,458.47	1,427.77	30.70	47.511	
4,400.00	4,392.85	4,345.62	4,337.14	15.82	15.77	-90.24	196.27	-1,513.18	1,460.44	1,429.01	31.44	46.456	
4,500.00	4,492.60	4,445.60	4,436.87	16.19	16.14	-90.27	202.15	-1,516.94	1,462.42	1,430.24	32.18	45.449	
4,600.00	4,592.36	4,545.57	4,536.60	16.56	16.51	-90.31	208.03	-1,520.70	1,464.39	1,431.47	32.92	44.487	
4,700.00	4,692.12	4,645.55	4,636.33	16.94	16.89	-90.34	213.90	-1,524.47	1,466.37	1,432.71	33.66	43.568	
4,800.00	4,791.87	4,745.53	4,736.07	17.31	17.26	-90.37	219.78	-1,528.23	1,468.34	1,433.95	34.40	42.688	
4,900.00	4,891.63	4,845.50	4,835.80	17.68	17.63	-90.41	225.65	-1,531.99	1,470.32	1,435.18	35.14	41.845	
5,000.00	4,991.38	4,945.48	4,935.53	18.05	18.00	-90.44	231.53	-1,535.76	1,472.30	1,436.42	35.88	41.037	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #211H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference	Offset		Semi Major Axis		Distance		Minimum Separation		Separation Factor		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
5,100.00	5,091.14	5,045.46	5,035.27	18.42	18.38	-90.47	237.41	-1,539.52	1,474.27	1,437.66	36.62	40.261		
5,200.00	5,190.90	5,145.43	5,135.00	18.79	18.75	-90.51	243.28	-1,543.28	1,476.25	1,438.89	37.36	39.516		
5,300.00	5,290.65	5,245.41	5,234.73	19.17	19.12	-90.54	249.16	-1,547.05	1,478.23	1,440.13	38.10	38.800		
5,400.00	5,390.41	5,345.39	5,334.47	19.54	19.50	-90.57	255.03	-1,550.81	1,480.21	1,441.37	38.84	38.111		
5,500.00	5,490.16	5,445.36	5,434.20	19.91	19.87	-90.61	260.91	-1,554.57	1,482.19	1,442.61	39.58	37.448		
5,600.00	5,589.92	5,545.34	5,533.93	20.28	20.24	-90.64	266.78	-1,558.34	1,484.17	1,443.85	40.32	36.809		
5,700.00	5,689.68	5,645.32	5,633.66	20.65	20.62	-90.67	272.66	-1,562.10	1,486.15	1,445.09	41.06	36.193		
5,800.00	5,789.43	5,745.29	5,733.40	21.03	20.99	-90.70	278.54	-1,565.86	1,488.13	1,446.33	41.80	35.599		
5,849.08	5,838.40	5,794.37	5,782.35	21.21	21.17	-90.72	281.42	-1,567.71	1,489.10	1,446.93	42.17	35.315		
5,900.00	5,889.21	5,845.27	5,833.13	21.40	21.36	-90.72	284.41	-1,569.63	1,490.19	1,447.65	42.54	35.028		
6,000.00	5,989.11	5,955.56	5,943.17	21.76	21.77	-90.65	290.62	-1,573.60	1,492.69	1,449.38	43.31	34.463		
6,100.00	6,089.10	6,081.72	6,069.22	22.11	22.23	-90.54	294.90	-1,576.34	1,494.40	1,450.28	44.12	33.871		
6,115.90	6,105.00	6,101.79	6,089.29	22.17	22.30	-90.53	295.26	-1,576.57	1,494.57	1,450.32	44.25	33.778		
6,200.00	6,189.10	6,200.60	6,188.10	22.46	22.64	-90.51	295.81	-1,576.92	1,494.85	1,449.97	44.88	33.308		
6,300.00	6,289.10	6,300.60	6,288.10	22.81	22.99	-90.51	295.81	-1,576.92	1,494.85	1,449.27	45.57	32.800		
6,400.00	6,389.10	6,400.60	6,388.10	23.16	23.33	-90.51	295.81	-1,576.92	1,494.85	1,448.58	46.27	32.306		
6,500.00	6,489.10	6,500.60	6,488.10	23.51	23.68	-90.51	295.81	-1,576.92	1,494.85	1,447.88	46.97	31.827		
6,600.00	6,589.10	6,600.60	6,588.10	23.86	24.02	-90.51	295.81	-1,576.92	1,494.85	1,447.18	47.67	31.361		
6,700.00	6,689.10	6,700.60	6,688.10	24.21	24.37	-90.51	295.81	-1,576.92	1,494.85	1,446.48	48.36	30.908		
6,800.00	6,789.10	6,800.60	6,788.10	24.56	24.72	-90.51	295.81	-1,576.92	1,494.85	1,445.78	49.06	30.468		
6,900.00	6,889.10	6,900.60	6,888.10	24.91	25.06	-90.51	295.81	-1,576.92	1,494.85	1,445.09	49.76	30.040		
7,000.00	6,989.10	7,000.60	6,988.10	25.26	25.41	-90.51	295.81	-1,576.92	1,494.85	1,444.39	50.46	29.623		
7,100.00	7,089.10	7,100.60	7,088.10	25.61	25.76	-90.51	295.81	-1,576.92	1,494.85	1,443.69	51.16	29.218		
7,200.00	7,189.10	7,200.60	7,188.10	25.96	26.11	-90.51	295.81	-1,576.92	1,494.85	1,442.98	51.86	28.823		
7,300.00	7,289.10	7,300.60	7,288.10	26.31	26.46	-90.51	295.81	-1,576.92	1,494.85	1,442.28	52.56	28.439		
7,400.00	7,389.10	7,400.60	7,388.10	26.67	26.80	-90.51	295.81	-1,576.92	1,494.85	1,441.58	53.27	28.064		
7,500.00	7,489.10	7,500.60	7,488.10	27.02	27.15	-90.51	295.81	-1,576.92	1,494.85	1,440.88	53.97	27.699		
7,600.00	7,589.10	7,600.60	7,588.10	27.37	27.50	-90.51	295.81	-1,576.92	1,494.85	1,440.18	54.67	27.343		
7,700.00	7,689.10	7,700.60	7,688.10	27.72	27.85	-90.51	295.81	-1,576.92	1,494.85	1,439.47	55.37	26.996		
7,800.00	7,789.10	7,800.60	7,788.10	28.07	28.20	-90.51	295.81	-1,576.92	1,494.85	1,438.77	56.08	26.658		
7,900.00	7,889.10	7,900.60	7,888.10	28.43	28.55	-90.51	295.81	-1,576.92	1,494.85	1,438.07	56.78	26.327		
8,000.00	7,989.10	8,000.60	7,988.10	28.78	28.90	-90.51	295.81	-1,576.92	1,494.85	1,437.36	57.48	26.005		
8,100.00	8,089.10	8,100.60	8,088.10	29.13	29.25	-90.51	295.81	-1,576.92	1,494.85	1,436.66	58.19	25.690		
8,200.00	8,189.10	8,200.60	8,188.10	29.48	29.60	-90.51	295.81	-1,576.92	1,494.85	1,435.96	58.89	25.383		
8,300.00	8,289.10	8,300.60	8,288.10	29.84	29.95	-90.51	295.81	-1,576.92	1,494.85	1,435.25	59.60	25.083		
8,400.00	8,389.10	8,400.60	8,388.10	30.19	30.30	-90.51	295.81	-1,576.92	1,494.85	1,434.55	60.30	24.790		
8,500.00	8,489.10	8,500.60	8,488.10	30.54	30.65	-90.51	295.81	-1,576.92	1,494.85	1,433.84	61.01	24.503		
8,600.00	8,589.10	8,600.60	8,588.10	30.90	31.00	-90.51	295.81	-1,576.92	1,494.85	1,433.14	61.71	24.223		
8,700.00	8,689.10	8,700.60	8,688.10	31.25	31.35	-90.51	295.81	-1,576.92	1,494.85	1,432.43	62.42	23.949		
8,800.00	8,789.10	8,800.60	8,788.10	31.60	31.71	-90.51	295.81	-1,576.92	1,494.85	1,431.72	63.12	23.681		
8,900.00	8,889.10	8,900.60	8,888.10	31.96	32.06	-90.51	295.81	-1,576.92	1,494.85	1,431.02	63.83	23.419		
9,000.00	8,989.10	9,000.60	8,988.10	32.31	32.41	-90.51	295.81	-1,576.92	1,494.85	1,430.31	64.54	23.163		
9,100.00	9,089.10	9,100.60	9,088.10	32.66	32.76	-90.51	295.81	-1,576.92	1,494.85	1,429.60	65.24	22.912		
9,200.00	9,189.10	9,200.60	9,188.10	33.02	33.11	-90.51	295.81	-1,576.92	1,494.85	1,428.90	65.95	22.666		
9,300.00	9,289.10	9,300.60	9,288.10	33.37	33.47	-90.51	295.81	-1,576.92	1,494.85	1,428.19	66.66	22.426		
9,400.00	9,389.10	9,400.60	9,388.10	33.73	33.82	-90.51	295.81	-1,576.92	1,494.85	1,427.48	67.36	22.190		
9,500.00	9,489.10	9,500.60	9,488.10	34.08	34.17	-90.51	295.81	-1,576.92	1,494.85	1,426.78	68.07	21.960		
9,600.00	9,589.10	9,600.60	9,588.10	34.43	34.52	-90.51	295.81	-1,576.92	1,494.85	1,426.07	68.78	21.734		
9,700.00	9,689.10	9,700.60	9,688.10	34.79	34.88	-90.51	295.81	-1,576.92	1,494.85	1,425.36	69.49	21.512		
9,800.00	9,789.10	9,800.60	9,788.10	35.14	35.23	-90.51	295.81	-1,576.92	1,494.85	1,424.65	70.20	21.295		
9,900.00	9,889.10	9,900.60	9,888.10	35.50	35.58	-90.51	295.81	-1,576.92	1,494.85	1,423.94	70.90	21.083		
10,000.00	9,989.10	10,000.60	9,988.10	35.85	35.93	-90.51	295.81	-1,576.92	1,494.85	1,423.23	71.61	20.874		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #211H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
10,100.00	10,089.10	10,100.60	10,088.10	36.21	36.29	-90.51	295.81	-1,576.92	1,494.85	1,422.53	72.32	20.669	
10,200.00	10,189.10	10,200.60	10,188.10	36.56	36.64	-90.51	295.81	-1,576.92	1,494.85	1,421.82	73.03	20.469	
10,300.00	10,289.10	10,300.60	10,288.10	36.92	36.99	-90.51	295.81	-1,576.92	1,494.85	1,421.11	73.74	20.272	
10,400.00	10,389.10	10,400.60	10,388.10	37.27	37.35	-90.51	295.81	-1,576.92	1,494.85	1,420.40	74.45	20.079	
10,500.00	10,489.10	10,500.60	10,488.10	37.63	37.70	-90.51	295.81	-1,576.92	1,494.85	1,419.69	75.16	19.889	
10,600.00	10,589.10	10,600.60	10,588.10	37.98	38.05	-90.51	295.81	-1,576.92	1,494.85	1,418.98	75.87	19.703	
10,700.00	10,689.10	10,700.60	10,688.10	38.34	38.41	-90.51	295.81	-1,576.92	1,494.85	1,418.27	76.58	19.521	
10,800.00	10,789.10	10,800.60	10,788.10	38.69	38.76	-90.51	295.81	-1,576.92	1,494.85	1,417.56	77.29	19.342	
10,900.00	10,889.10	10,900.60	10,888.10	39.05	39.12	-90.51	295.81	-1,576.92	1,494.85	1,416.85	78.00	19.166	
11,000.00	10,989.10	11,000.60	10,988.10	39.40	39.47	-90.51	295.81	-1,576.92	1,494.85	1,416.14	78.71	18.993	
11,100.00	11,089.10	11,100.60	11,088.10	39.76	39.82	-90.51	295.81	-1,576.92	1,494.85	1,415.43	79.42	18.823	
11,200.00	11,189.10	11,200.60	11,188.10	40.11	40.18	-90.51	295.81	-1,576.92	1,494.85	1,414.72	80.13	18.656	
11,300.00	11,289.10	11,300.60	11,288.10	40.47	40.53	-90.51	295.81	-1,576.92	1,494.85	1,414.01	80.84	18.492	
11,400.00	11,389.10	11,400.60	11,388.10	40.82	40.89	-90.51	295.81	-1,576.92	1,494.85	1,413.30	81.55	18.331	
11,443.94	11,433.04	11,444.55	11,432.04	40.98	41.04	-90.51	295.81	-1,576.92	1,494.85	1,412.99	81.86	18.261	
11,450.00	11,439.10	11,450.60	11,438.10	41.00	41.06	-90.51	295.81	-1,576.92	1,494.84	1,412.94	81.90	18.252	
11,500.00	11,489.01	11,500.51	11,488.01	41.16	41.24	-90.41	295.81	-1,576.92	1,494.29	1,412.06	82.23	18.171	
11,550.00	11,538.49	11,550.00	11,537.49	41.31	41.42	-90.14	295.81	-1,576.92	1,492.87	1,410.32	82.55	18.083	
11,600.00	11,587.17	11,598.68	11,586.17	41.45	41.59	-89.72	295.81	-1,576.92	1,490.67	1,407.80	82.86	17.990	
11,650.00	11,634.68	11,646.19	11,633.68	41.58	41.76	-89.13	295.81	-1,576.92	1,487.78	1,404.62	83.16	17.891	
11,700.00	11,680.66	11,692.16	11,679.66	41.70	41.92	-88.38	295.81	-1,576.92	1,484.35	1,400.92	83.44	17.790	
11,750.00	11,724.75	11,736.25	11,723.75	41.81	42.08	-87.49	295.81	-1,576.92	1,480.57	1,396.87	83.70	17.689	
11,800.00	11,766.62	11,778.12	11,765.62	41.91	42.22	-86.44	295.81	-1,576.92	1,476.65	1,392.70	83.95	17.590	
11,850.00	11,805.95	11,817.45	11,804.95	42.00	42.36	-85.25	295.81	-1,576.92	1,472.81	1,388.64	84.18	17.496	
11,900.00	11,842.44	11,853.95	11,841.44	42.09	42.49	-83.93	295.81	-1,576.92	1,469.31	1,384.92	84.39	17.410	
11,950.00	11,875.82	11,887.32	11,874.82	42.17	42.61	-82.48	295.81	-1,576.92	1,466.39	1,381.79	84.60	17.334	
12,000.00	11,905.83	11,917.33	11,904.83	42.25	42.72	-80.92	295.81	-1,576.92	1,464.30	1,379.51	84.79	17.270	
12,050.00	11,932.24	11,943.74	11,931.24	42.34	42.81	-79.26	295.81	-1,576.92	1,463.27	1,378.31	84.96	17.222	
12,072.94	11,943.09	11,965.60	11,953.09	42.39	42.88	-78.48	295.43	-1,576.92	1,463.18	1,378.12	85.06	17.201	
12,100.00	11,954.85	11,994.79	11,982.23	42.44	42.97	-77.59	293.62	-1,576.91	1,463.31	1,378.13	85.18	17.179	
12,150.00	11,973.49	12,057.80	12,044.57	42.53	43.16	-76.12	284.69	-1,576.85	1,464.21	1,378.85	85.36	17.153	
12,200.00	11,988.01	12,139.98	12,123.72	42.63	43.38	-75.07	262.87	-1,576.70	1,465.84	1,380.38	85.46	17.153	
12,250.00	11,998.31	12,258.83	12,230.83	42.73	43.66	-75.09	211.85	-1,576.35	1,467.76	1,382.45	85.32	17.204	
12,300.00	12,004.31	12,452.69	12,376.22	42.84	43.98	-78.03	85.02	-1,575.48	1,468.72	1,384.08	84.64	17.353	
12,343.94	12,008.00	12,728.35	12,493.42	42.93	44.40	-86.22	-161.55	-1,573.80	1,466.15	1,382.28	83.87	17.482	
12,400.00	12,006.00	12,855.50	12,509.36	43.06	44.66	-89.15	-287.58	-1,572.94	1,458.24	1,374.27	83.96	17.367	
12,500.00	12,006.00	12,983.70	12,511.00	43.33	44.98	-90.39	-415.75	-1,572.06	1,442.93	1,358.54	84.39	17.098	
12,600.00	12,006.00	13,082.82	12,511.00	43.66	45.29	-90.39	-514.87	-1,571.39	1,430.60	1,345.70	84.90	16.851	
12,700.00	12,006.00	13,182.35	12,511.00	44.05	45.65	-90.39	-614.39	-1,570.71	1,421.52	1,335.99	85.53	16.620	
12,800.00	12,006.00	13,282.15	12,511.00	44.48	46.07	-90.39	-714.19	-1,570.03	1,415.71	1,329.42	86.28	16.408	
12,900.00	12,006.00	13,382.10	12,511.00	44.96	46.55	-90.39	-814.15	-1,569.34	1,413.15	1,325.99	87.16	16.214	
12,927.98	12,006.00	13,410.08	12,511.00	45.11	46.69	-90.39	-842.12	-1,569.15	1,413.01	1,325.59	87.42	16.164	
13,000.00	12,006.00	13,482.10	12,511.00	45.50	47.07	-90.39	-914.14	-1,568.66	1,413.00	1,324.86	88.14	16.031	
13,100.00	12,006.00	13,582.10	12,511.00	46.08	47.65	-90.39	-1,014.14	-1,567.98	1,412.98	1,323.75	89.23	15.835	
13,200.00	12,006.00	13,682.10	12,511.00	46.72	48.28	-90.39	-1,114.14	-1,567.29	1,412.97	1,322.55	90.42	15.627	
13,300.00	12,006.00	13,782.10	12,511.00	47.40	48.96	-90.39	-1,214.14	-1,566.61	1,412.95	1,321.26	91.69	15.409	
13,400.00	12,006.00	13,882.10	12,511.00	48.13	49.68	-90.39	-1,314.13	-1,565.93	1,412.93	1,319.87	93.06	15.183	
13,500.00	12,006.00	13,982.10	12,511.00	48.91	50.44	-90.39	-1,414.13	-1,565.25	1,412.91	1,318.41	94.51	14.950	
13,600.00	12,006.00	14,082.10	12,511.00	49.73	51.25	-90.39	-1,514.13	-1,564.56	1,412.90	1,316.86	96.04	14.712	
13,700.00	12,006.00	14,182.10	12,511.00	50.59	52.09	-90.39	-1,614.13	-1,563.88	1,412.88	1,315.24	97.64	14.470	
13,800.00	12,006.00	14,282.10	12,511.00	51.49	52.98	-90.39	-1,714.12	-1,563.20	1,412.86	1,313.54	99.32	14.225	
13,900.00	12,006.00	14,382.10	12,511.00	52.42	53.90	-90.39	-1,814.12	-1,562.51	1,412.85	1,311.77	101.07	13.978	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #211H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
14,000.00	12,006.00	14,482.10	12,511.00	53.39	54.85	-90.39	-1,914.12	-1,561.83	1,412.83	1,309.94	102.89	13.732		
14,100.00	12,006.00	14,582.10	12,511.00	54.39	55.84	-90.39	-2,014.12	-1,561.15	1,412.81	1,308.04	104.77	13.485		
14,200.00	12,006.00	14,682.10	12,511.00	55.43	56.85	-90.39	-2,114.11	-1,560.47	1,412.79	1,306.09	106.70	13.240		
14,300.00	12,006.00	14,782.10	12,511.00	56.49	57.90	-90.39	-2,214.11	-1,559.78	1,412.78	1,304.08	108.70	12.997		
14,400.00	12,006.00	14,882.10	12,511.00	57.58	58.97	-90.39	-2,314.11	-1,559.10	1,412.76	1,302.02	110.74	12.757		
14,500.00	12,006.00	14,982.10	12,511.00	58.70	60.08	-90.39	-2,414.11	-1,558.42	1,412.74	1,299.90	112.84	12.520		
14,600.00	12,006.00	15,082.10	12,511.00	59.84	61.20	-90.39	-2,514.11	-1,557.73	1,412.72	1,297.74	114.98	12.286		
14,700.00	12,006.00	15,182.10	12,511.00	61.01	62.35	-90.39	-2,614.10	-1,557.05	1,412.71	1,295.54	117.17	12.057		
14,800.00	12,006.00	15,282.10	12,511.00	62.19	63.52	-90.39	-2,714.10	-1,556.37	1,412.69	1,293.29	119.40	11.832		
14,900.00	12,006.00	15,382.10	12,511.00	63.40	64.71	-90.39	-2,814.10	-1,555.68	1,412.67	1,291.00	121.67	11.611		
15,000.00	12,006.00	15,482.10	12,511.00	64.63	65.93	-90.39	-2,914.10	-1,555.00	1,412.66	1,288.68	123.98	11.394		
15,100.00	12,006.00	15,582.10	12,511.00	65.88	67.16	-90.39	-3,014.09	-1,554.32	1,412.64	1,286.31	126.32	11.183		
15,200.00	12,006.00	15,682.10	12,511.00	67.14	68.40	-90.39	-3,114.09	-1,553.64	1,412.62	1,283.92	128.70	10.976		
15,300.00	12,006.00	15,782.10	12,511.00	68.42	69.67	-90.39	-3,214.09	-1,552.95	1,412.60	1,281.49	131.11	10.774		
15,400.00	12,006.00	15,882.10	12,511.00	69.72	70.95	-90.39	-3,314.09	-1,552.27	1,412.59	1,279.04	133.55	10.577		
15,500.00	12,006.00	15,982.10	12,511.00	71.03	72.25	-90.39	-3,414.08	-1,551.59	1,412.57	1,276.55	136.02	10.385		
15,600.00	12,006.00	16,082.10	12,511.00	72.35	73.56	-90.39	-3,514.08	-1,550.90	1,412.55	1,274.04	138.51	10.198		
15,700.00	12,006.00	16,182.10	12,511.00	73.69	74.88	-90.39	-3,614.08	-1,550.22	1,412.53	1,271.50	141.03	10.016		
15,800.00	12,006.00	16,282.10	12,511.00	75.04	76.22	-90.39	-3,714.08	-1,549.54	1,412.52	1,268.94	143.58	9.838		
15,900.00	12,006.00	16,382.10	12,511.00	76.41	77.57	-90.39	-3,814.07	-1,548.85	1,412.50	1,266.35	146.15	9.665		
16,000.00	12,006.00	16,482.10	12,511.00	77.78	78.93	-90.39	-3,914.07	-1,548.17	1,412.48	1,263.74	148.74	9.496		
16,100.00	12,006.00	16,582.10	12,511.00	79.16	80.30	-90.39	-4,014.07	-1,547.49	1,412.46	1,261.12	151.35	9.333		
16,200.00	12,006.00	16,682.10	12,511.00	80.56	81.68	-90.39	-4,114.07	-1,546.81	1,412.45	1,258.47	153.98	9.173		
16,300.00	12,006.00	16,782.10	12,511.00	81.96	83.07	-90.39	-4,214.07	-1,546.12	1,412.43	1,255.80	156.63	9.018		
16,400.00	12,006.00	16,882.10	12,511.00	83.38	84.47	-90.39	-4,314.06	-1,545.44	1,412.41	1,253.12	159.29	8.867		
16,500.00	12,006.00	16,982.10	12,511.00	84.80	85.88	-90.39	-4,414.06	-1,544.76	1,412.40	1,250.42	161.98	8.720		
16,600.00	12,006.00	17,082.10	12,511.00	86.23	87.30	-90.39	-4,514.06	-1,544.07	1,412.38	1,247.70	164.68	8.577		
16,700.00	12,006.00	17,182.10	12,511.00	87.67	88.73	-90.39	-4,614.06	-1,543.39	1,412.36	1,244.97	167.39	8.437		
16,778.77	12,006.00	17,260.87	12,511.00	88.80	89.86	-90.39	-4,692.82	-1,542.85	1,412.35	1,242.81	169.54	8.331		
16,779.05	12,006.00	17,260.91	12,511.00	88.81	89.86	-90.38	-4,692.86	-1,542.85	1,412.35	1,242.80	169.54	8.330		
16,779.28	12,006.00	17,260.91	12,511.00	88.82	89.86	-90.37	-4,692.86	-1,542.85	1,412.35	1,242.80	169.55	8.330 ES, SF		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #212H - Wellbore #1 - Design #1														Offset Site Error:	0.00 usft
Survey Program: 0-MWD														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)					
0.00	0.00	0.00	0.00	0.00	0.00	-90.39	-0.41	-60.00	60.01						
100.00	100.00	99.00	99.00	0.13	0.13	-90.39	-0.41	-60.00	60.00	59.75	0.26	235.272			
200.00	200.00	199.00	199.00	0.49	0.48	-90.39	-0.41	-60.00	60.00	59.03	0.97	61.877			
300.00	300.00	299.00	299.00	0.85	0.84	-90.39	-0.41	-60.00	60.00	58.31	1.69	35.575			
400.00	400.00	399.00	399.00	1.20	1.20	-90.39	-0.41	-60.00	60.00	57.60	2.40	24.963			
500.00	500.00	499.00	499.00	1.56	1.56	-90.39	-0.41	-60.00	60.00	56.88	3.12	19.228			
600.00	600.00	599.00	599.00	1.92	1.92	-90.39	-0.41	-60.00	60.00	56.16	3.84	15.636 CC			
700.00	700.00	698.44	698.44	2.28	2.27	-89.72	0.30	-60.45	60.46	55.91	4.55	13.285 ES			
800.00	800.00	797.82	797.78	2.64	2.63	-87.72	2.46	-61.84	61.90	56.64	5.26	11.762			
900.00	900.00	897.07	896.94	3.00	2.98	-84.59	6.07	-64.15	64.47	58.49	5.97	10.790			
1,000.00	1,000.00	996.15	995.84	3.35	3.34	-80.63	11.12	-67.38	68.36	61.68	6.69	10.225			
1,100.00	1,100.00	1,095.88	1,095.32	3.71	3.70	-76.58	16.97	-71.13	73.22	65.81	7.40	9.892			
1,200.00	1,200.00	1,195.64	1,194.83	4.07	4.07	-73.04	22.83	-74.88	78.39	70.27	8.12	9.656			
1,300.00	1,299.99	1,295.45	1,294.40	4.43	4.43	-70.45	28.69	-78.63	83.33	74.50	8.83	9.432			
1,400.00	1,399.96	1,395.34	1,394.05	4.79	4.80	-69.06	34.56	-82.38	87.39	77.84	9.55	9.149			
1,500.00	1,499.86	1,495.29	1,493.76	5.15	5.17	-68.68	40.43	-86.14	90.45	80.18	10.27	8.806			
1,600.00	1,599.68	1,595.26	1,593.49	5.51	5.54	-69.19	46.30	-89.90	92.48	81.49	10.99	8.414			
1,600.23	1,599.90	1,595.49	1,593.72	5.51	5.54	-69.19	46.31	-89.91	92.49	81.50	10.99	8.413			
1,700.00	1,699.43	1,695.24	1,693.23	5.87	5.91	-70.11	52.17	-93.66	94.02	82.31	11.71	8.026			
1,800.00	1,799.19	1,795.22	1,792.96	6.23	6.28	-71.01	58.04	-97.41	95.58	83.14	12.44	7.684			
1,900.00	1,898.94	1,895.20	1,892.69	6.59	6.65	-71.87	63.91	-101.17	97.17	84.00	13.17	7.380			
2,000.00	1,998.70	1,995.17	1,992.43	6.95	7.02	-72.71	69.78	-104.93	98.77	84.88	13.89	7.109			
2,100.00	2,098.46	2,095.15	2,092.16	7.32	7.39	-73.52	75.65	-108.69	100.40	85.78	14.62	6.866			
2,200.00	2,198.21	2,195.13	2,191.89	7.69	7.76	-74.31	81.52	-112.45	102.04	86.69	15.35	6.646			
2,300.00	2,297.97	2,295.10	2,291.63	8.05	8.13	-75.07	87.40	-116.20	103.71	87.62	16.09	6.447			
2,400.00	2,397.72	2,395.08	2,391.36	8.42	8.50	-75.80	93.27	-119.96	105.39	88.57	16.82	6.267			
2,500.00	2,497.48	2,495.06	2,491.09	8.79	8.87	-76.52	99.14	-123.72	107.09	89.54	17.55	6.102			
2,600.00	2,597.24	2,595.03	2,590.83	9.16	9.24	-77.21	105.01	-127.48	108.80	90.52	18.28	5.950			
2,700.00	2,696.99	2,695.01	2,690.56	9.52	9.62	-77.87	110.88	-131.24	110.53	91.51	19.02	5.811			
2,800.00	2,796.75	2,794.99	2,790.29	9.89	9.99	-78.52	116.75	-134.99	112.28	92.52	19.76	5.683			
2,900.00	2,896.50	2,894.96	2,890.03	10.26	10.36	-79.15	122.62	-138.75	114.03	93.54	20.49	5.565			
3,000.00	2,996.26	2,994.94	2,989.76	10.63	10.73	-79.76	128.49	-142.51	115.81	94.58	21.23	5.455			
3,100.00	3,096.02	3,094.92	3,089.49	11.00	11.11	-80.35	134.36	-146.27	117.59	95.62	21.97	5.353			
3,200.00	3,195.77	3,194.89	3,189.23	11.37	11.48	-80.92	140.23	-150.03	119.39	96.68	22.70	5.259			
3,300.00	3,295.53	3,294.87	3,288.96	11.74	11.85	-81.48	146.11	-153.78	121.19	97.75	23.44	5.170			
3,400.00	3,395.29	3,394.85	3,388.70	12.11	12.22	-82.02	151.98	-157.54	123.01	98.83	24.18	5.087			
3,500.00	3,495.04	3,494.83	3,488.43	12.48	12.60	-82.54	157.85	-161.30	124.84	99.92	24.92	5.010			
3,600.00	3,594.80	3,594.80	3,588.16	12.85	12.97	-83.05	163.72	-165.06	126.68	101.02	25.66	4.937			
3,700.00	3,694.55	3,694.78	3,687.90	13.22	13.34	-83.54	169.59	-168.82	128.53	102.13	26.40	4.869			
3,800.00	3,794.31	3,794.76	3,787.63	13.59	13.71	-84.02	175.46	-172.57	130.39	103.25	27.14	4.805			
3,900.00	3,894.07	3,894.73	3,887.36	13.96	14.09	-84.49	181.33	-176.33	132.26	104.38	27.88	4.744			
4,000.00	3,993.82	3,994.71	3,987.10	14.34	14.46	-84.94	187.20	-180.09	134.13	105.51	28.62	4.687			
4,100.00	4,093.58	4,094.69	4,086.83	14.71	14.83	-85.38	193.07	-183.85	136.02	106.66	29.36	4.632			
4,200.00	4,193.33	4,194.66	4,186.56	15.08	15.20	-85.81	198.94	-187.61	137.91	107.81	30.10	4.581			
4,300.00	4,293.09	4,294.64	4,286.30	15.45	15.58	-86.23	204.82	-191.36	139.81	108.96	30.84	4.533			
4,400.00	4,392.85	4,394.62	4,386.03	15.82	15.95	-86.63	210.69	-195.12	141.71	110.13	31.59	4.487			
4,500.00	4,492.60	4,494.59	4,485.76	16.19	16.32	-87.03	216.56	-198.88	143.63	111.30	32.33	4.443			
4,600.00	4,592.36	4,594.57	4,585.50	16.56	16.70	-87.41	222.43	-202.64	145.55	112.48	33.07	4.401			
4,700.00	4,692.12	4,694.55	4,685.23	16.94	17.07	-87.78	228.30	-206.39	147.47	113.66	33.81	4.361			
4,800.00	4,791.87	4,794.52	4,784.97	17.31	17.44	-88.15	234.17	-210.15	149.41	114.85	34.56	4.324			
4,900.00	4,891.63	4,894.50	4,884.70	17.68	17.81	-88.50	240.04	-213.91	151.35	116.05	35.30	4.288			
5,000.00	4,991.38	4,994.48	4,984.43	18.05	18.19	-88.85	245.91	-217.67	153.29	117.25	36.04	4.253			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #212H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Distance										Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
5,100.00	5,091.14	5,094.45	5,084.17	18.42	18.56	-89.19	251.78	-221.43	155.24	118.46	36.78	4.220		
5,200.00	5,190.90	5,194.43	5,183.90	18.79	18.93	-89.52	257.65	-225.18	157.20	119.67	37.53	4.189		
5,300.00	5,290.65	5,294.41	5,283.63	19.17	19.31	-89.84	263.53	-228.94	159.16	120.88	38.27	4.159		
5,400.00	5,390.41	5,394.39	5,383.37	19.54	19.68	-90.15	269.40	-232.70	161.12	122.10	39.02	4.130		
5,500.00	5,490.16	5,494.36	5,483.10	19.91	20.05	-90.46	275.27	-236.46	163.09	123.33	39.76	4.102		
5,600.00	5,589.92	5,594.34	5,582.83	20.28	20.42	-90.76	281.14	-240.22	165.06	124.56	40.50	4.075		
5,700.00	5,689.68	5,694.32	5,682.57	20.65	20.80	-91.05	287.01	-243.97	167.04	125.80	41.25	4.050		
5,800.00	5,789.43	5,794.29	5,782.30	21.03	21.17	-91.33	292.88	-247.73	169.03	127.03	41.99	4.025		
5,849.08	5,838.40	5,843.37	5,831.25	21.21	21.35	-91.47	295.76	-249.58	170.00	127.64	42.36	4.014		
5,900.00	5,889.21	5,894.27	5,882.03	21.40	21.54	-91.50	298.75	-251.49	171.09	128.36	42.73	4.004		
6,000.00	5,989.11	5,996.25	5,983.82	21.76	21.92	-91.15	303.94	-254.81	173.21	129.75	43.47	3.985		
6,100.00	6,089.10	6,098.68	6,086.19	22.11	22.29	-90.73	306.88	-256.69	174.59	130.40	44.18	3.951		
6,115.90	6,105.00	6,114.98	6,102.49	22.17	22.35	-90.65	307.13	-256.85	174.74	130.44	44.29	3.945		
6,200.00	6,189.10	6,200.59	6,188.10	22.46	22.64	-90.51	307.56	-257.13	175.00	130.12	44.88	3.899		
6,300.00	6,289.10	6,300.59	6,288.10	22.81	22.99	-90.51	307.56	-257.13	175.00	129.42	45.58	3.840		
6,400.00	6,389.10	6,400.59	6,388.10	23.16	23.33	-90.51	307.56	-257.13	175.00	128.73	46.27	3.782		
6,500.00	6,489.10	6,500.59	6,488.10	23.51	23.68	-90.51	307.56	-257.13	175.00	128.03	46.97	3.726		
6,600.00	6,589.10	6,600.59	6,588.10	23.86	24.02	-90.51	307.56	-257.13	175.00	127.33	47.67	3.671		
6,700.00	6,689.10	6,700.59	6,688.10	24.21	24.37	-90.51	307.56	-257.13	175.00	126.64	48.36	3.618		
6,800.00	6,789.10	6,800.59	6,788.10	24.56	24.72	-90.51	307.56	-257.13	175.00	125.94	49.06	3.567		
6,900.00	6,889.10	6,900.59	6,888.10	24.91	25.06	-90.51	307.56	-257.13	175.00	125.24	49.76	3.517		
7,000.00	6,989.10	7,000.59	6,988.10	25.26	25.41	-90.51	307.56	-257.13	175.00	124.54	50.46	3.468		
7,100.00	7,089.10	7,100.59	7,088.10	25.61	25.76	-90.51	307.56	-257.13	175.00	123.84	51.16	3.420		
7,200.00	7,189.10	7,200.59	7,188.10	25.96	26.11	-90.51	307.56	-257.13	175.00	123.14	51.86	3.374		
7,300.00	7,289.10	7,300.59	7,288.10	26.31	26.46	-90.51	307.56	-257.13	175.00	122.44	52.56	3.329		
7,400.00	7,389.10	7,400.59	7,388.10	26.67	26.80	-90.51	307.56	-257.13	175.00	121.73	53.27	3.285		
7,500.00	7,489.10	7,500.59	7,488.10	27.02	27.15	-90.51	307.56	-257.13	175.00	121.03	53.97	3.243		
7,600.00	7,589.10	7,600.59	7,588.10	27.37	27.50	-90.51	307.56	-257.13	175.00	120.33	54.67	3.201		
7,700.00	7,689.10	7,700.59	7,688.10	27.72	27.85	-90.51	307.56	-257.13	175.00	119.63	55.37	3.160		
7,800.00	7,789.10	7,800.59	7,788.10	28.07	28.20	-90.51	307.56	-257.13	175.00	118.92	56.08	3.121		
7,900.00	7,889.10	7,900.59	7,888.10	28.43	28.55	-90.51	307.56	-257.13	175.00	118.22	56.78	3.082		
8,000.00	7,989.10	8,000.59	7,988.10	28.78	28.90	-90.51	307.56	-257.13	175.00	117.52	57.48	3.044		
8,100.00	8,089.10	8,100.59	8,088.10	29.13	29.25	-90.51	307.56	-257.13	175.00	116.81	58.19	3.008		
8,200.00	8,189.10	8,200.59	8,188.10	29.48	29.60	-90.51	307.56	-257.13	175.00	116.11	58.89	2.972		
8,300.00	8,289.10	8,300.59	8,288.10	29.84	29.95	-90.51	307.56	-257.13	175.00	115.40	59.60	2.936		
8,400.00	8,389.10	8,400.59	8,388.10	30.19	30.30	-90.51	307.56	-257.13	175.00	114.70	60.30	2.902		
8,500.00	8,489.10	8,500.59	8,488.10	30.54	30.65	-90.51	307.56	-257.13	175.00	113.99	61.01	2.869		
8,600.00	8,589.10	8,600.59	8,588.10	30.90	31.00	-90.51	307.56	-257.13	175.00	113.29	61.71	2.836		
8,700.00	8,689.10	8,700.59	8,688.10	31.25	31.35	-90.51	307.56	-257.13	175.00	112.58	62.42	2.804		
8,800.00	8,789.10	8,800.59	8,788.10	31.60	31.71	-90.51	307.56	-257.13	175.00	111.88	63.12	2.772		
8,900.00	8,889.10	8,900.59	8,888.10	31.96	32.06	-90.51	307.56	-257.13	175.00	111.17	63.83	2.742		
9,000.00	8,989.10	9,000.59	8,988.10	32.31	32.41	-90.51	307.56	-257.13	175.00	110.46	64.54	2.712		
9,100.00	9,089.10	9,100.59	9,088.10	32.66	32.76	-90.51	307.56	-257.13	175.00	109.76	65.24	2.682		
9,200.00	9,189.10	9,200.59	9,188.10	33.02	33.11	-90.51	307.56	-257.13	175.00	109.05	65.95	2.654		
9,300.00	9,289.10	9,300.59	9,288.10	33.37	33.47	-90.51	307.56	-257.13	175.00	108.34	66.66	2.625		
9,400.00	9,389.10	9,400.59	9,388.10	33.73	33.82	-90.51	307.56	-257.13	175.00	107.64	67.36	2.598		
9,500.00	9,489.10	9,500.59	9,488.10	34.08	34.17	-90.51	307.56	-257.13	175.00	106.93	68.07	2.571		
9,600.00	9,589.10	9,600.59	9,588.10	34.43	34.52	-90.51	307.56	-257.13	175.00	106.22	68.78	2.544		
9,700.00	9,689.10	9,700.59	9,688.10	34.79	34.88	-90.51	307.56	-257.13	175.00	105.51	69.49	2.518		
9,800.00	9,789.10	9,800.59	9,788.10	35.14	35.23	-90.51	307.56	-257.13	175.00	104.80	70.20	2.493		
9,900.00	9,889.10	9,900.59	9,888.10	35.50	35.58	-90.51	307.56	-257.13	175.00	104.10	70.90	2.468		
10,000.00	9,989.10	10,000.59	9,988.10	35.85	35.93	-90.51	307.56	-257.13	175.00	103.39	71.61	2.444		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #212H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Distance Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,100.00	10,089.10	10,100.59	10,088.10	36.21	36.29	-90.51	307.56	-257.13	175.00	102.68	72.32	2.420	
10,200.00	10,189.10	10,200.59	10,188.10	36.56	36.64	-90.51	307.56	-257.13	175.00	101.97	73.03	2.396	
10,300.00	10,289.10	10,300.59	10,288.10	36.92	36.99	-90.51	307.56	-257.13	175.00	101.26	73.74	2.373	
10,400.00	10,389.10	10,400.59	10,388.10	37.27	37.35	-90.51	307.56	-257.13	175.00	100.55	74.45	2.351	
10,500.00	10,489.10	10,500.59	10,488.10	37.63	37.70	-90.51	307.56	-257.13	175.00	99.84	75.16	2.328	
10,600.00	10,589.10	10,600.59	10,588.10	37.98	38.05	-90.51	307.56	-257.13	175.00	99.13	75.87	2.307	
10,700.00	10,689.10	10,700.59	10,688.10	38.34	38.41	-90.51	307.56	-257.13	175.00	98.42	76.58	2.285	
10,800.00	10,789.10	10,800.59	10,788.10	38.69	38.76	-90.51	307.56	-257.13	175.00	97.71	77.29	2.264	
10,900.00	10,889.10	10,900.59	10,888.10	39.05	39.12	-90.51	307.56	-257.13	175.00	97.00	78.00	2.244	
11,000.00	10,989.10	11,000.59	10,988.10	39.40	39.47	-90.51	307.56	-257.13	175.00	96.29	78.71	2.223	
11,100.00	11,089.10	11,100.59	11,088.10	39.76	39.82	-90.51	307.56	-257.13	175.00	95.58	79.42	2.204	
11,200.00	11,189.10	11,200.59	11,188.10	40.11	40.18	-90.51	307.56	-257.13	175.00	94.87	80.13	2.184	
11,300.00	11,289.10	11,300.59	11,288.10	40.47	40.53	-90.51	307.56	-257.13	175.00	94.16	80.84	2.165	
11,400.00	11,389.10	11,400.59	11,388.10	40.82	40.89	-90.51	307.56	-257.13	175.00	93.45	81.55	2.146	
11,443.94	11,433.04	11,444.53	11,432.04	40.98	41.04	-90.51	307.56	-257.13	175.00	93.14	81.86	2.138	
11,450.00	11,439.10	11,450.59	11,438.10	41.00	41.06	-90.50	307.56	-257.13	174.99	93.09	81.90	2.137	
11,500.00	11,489.01	11,500.50	11,488.01	41.16	41.24	-89.63	307.56	-257.13	174.46	92.23	82.23	2.122	
11,550.00	11,538.49	11,549.98	11,537.49	41.31	41.42	-87.34	307.56	-257.13	173.26	90.73	82.53	2.099	
11,600.00	11,587.17	11,598.67	11,586.17	41.45	41.59	-83.60	307.56	-257.13	171.92	89.11	82.81	2.076	
11,647.60	11,632.44	11,643.93	11,631.44	41.57	41.75	-78.70	307.56	-257.13	171.30	88.24	83.06	2.062	
11,650.00	11,634.68	11,646.18	11,633.68	41.58	41.76	-78.42	307.56	-257.13	171.30	88.23	83.07	2.062 SF	
11,700.00	11,680.66	11,692.15	11,679.66	41.70	41.92	-71.89	307.56	-257.13	172.51	89.21	83.31	2.071	
11,750.00	11,724.75	11,736.24	11,723.75	41.81	42.08	-64.29	307.56	-257.13	176.86	93.33	83.53	2.117	
11,800.00	11,766.62	11,778.11	11,765.62	41.91	42.22	-56.10	307.56	-257.13	185.54	101.80	83.75	2.216	
11,850.00	11,805.95	11,817.44	11,804.95	42.00	42.36	-47.89	307.56	-257.13	199.44	115.47	83.97	2.375	
11,900.00	11,842.44	11,853.93	11,841.44	42.09	42.49	-40.19	307.56	-257.13	218.91	134.72	84.19	2.600	
11,950.00	11,875.82	11,887.31	11,874.82	42.17	42.61	-33.33	307.56	-257.13	243.82	159.42	84.40	2.889	
12,000.00	11,905.83	11,920.12	11,907.63	42.25	42.73	-27.45	307.52	-257.13	273.69	189.10	84.59	3.235	
12,050.00	11,932.24	11,973.46	11,960.85	42.34	42.90	-22.72	304.43	-257.11	306.50	222.05	84.44	3.630	
12,100.00	11,954.85	12,035.64	12,022.23	42.44	43.08	-19.07	294.60	-257.04	340.53	256.85	83.68	4.069	
12,150.00	11,973.49	12,088.40	12,073.10	42.53	43.22	-16.06	280.71	-256.95	374.71	291.81	82.90	4.520	
12,200.00	11,988.01	12,208.86	12,183.46	42.63	43.51	-14.60	233.12	-256.64	408.12	329.72	78.40	5.205	
12,250.00	11,998.31	12,341.84	12,290.56	42.73	43.76	-14.22	154.79	-256.12	438.34	366.40	71.94	6.093	
12,300.00	12,004.31	12,529.72	12,405.13	42.84	44.01	-17.75	6.96	-255.15	461.74	400.06	61.67	7.487	
12,343.94	12,006.00	12,746.26	12,470.05	42.93	44.39	-47.48	-198.26	-253.80	471.99	417.83	54.15	8.716	
12,400.00	12,006.00	12,856.27	12,474.00	43.06	44.62	-90.38	-308.12	-253.08	471.48	417.58	53.89	8.749	
12,500.00	12,006.00	12,954.88	12,474.00	43.33	44.87	-90.38	-406.73	-252.43	470.07	416.13	53.94	8.714	
12,600.00	12,006.00	13,054.01	12,474.00	43.66	45.18	-90.38	-505.85	-251.78	469.37	415.21	54.16	8.667	
12,700.00	12,006.00	13,153.53	12,474.00	44.05	45.55	-90.38	-605.38	-251.12	469.08	414.60	54.48	8.610	
12,800.00	12,006.00	13,253.34	12,474.00	44.48	45.97	-90.38	-705.18	-250.47	469.01	414.13	54.88	8.546	
12,891.21	12,006.00	13,344.50	12,474.00	44.92	46.40	89.62	-796.34	-249.87	469.00	413.72	55.29	8.483	
12,900.00	12,006.00	13,353.29	12,474.00	44.96	46.44	89.62	-805.13	-249.81	469.00	413.68	55.32	8.477	
12,927.98	12,006.00	13,381.27	12,474.00	45.11	46.59	89.62	-833.11	-249.62	469.00	413.55	55.45	8.458	
13,000.00	12,006.00	13,453.29	12,474.00	45.50	46.97	89.62	-905.13	-249.15	469.00	413.20	55.80	8.405	
13,100.00	12,006.00	13,553.29	12,474.00	46.08	47.56	89.62	-1,005.13	-248.49	469.00	412.69	56.32	8.328	
13,200.00	12,006.00	13,653.29	12,474.00	46.72	48.19	89.62	-1,105.13	-247.84	469.00	412.13	56.87	8.247	
13,300.00	12,006.00	13,753.29	12,474.00	47.40	48.86	89.62	-1,205.12	-247.18	469.00	411.54	57.46	8.162	
13,400.00	12,006.00	13,853.29	12,474.00	48.13	49.59	89.62	-1,305.12	-246.52	469.00	410.91	58.09	8.074	
13,500.00	12,006.00	13,953.29	12,474.00	48.91	50.35	89.62	-1,405.12	-245.86	469.00	410.25	58.75	7.983	
13,600.00	12,006.00	14,053.29	12,474.00	49.73	51.16	89.62	-1,505.12	-245.20	469.00	409.55	59.45	7.889	
13,700.00	12,006.00	14,153.29	12,474.00	50.59	52.01	89.62	-1,605.12	-244.55	469.00	408.82	60.18	7.793	
13,800.00	12,006.00	14,253.29	12,474.00	51.49	52.90	89.62	-1,705.11	-243.89	469.00	408.06	60.94	7.696	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #212H - Wellbore #1 - Design #1												Offset Site Error: 0.00 usft	
Survey Program: 0-MWD												Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
13,900.00	12,006.00	14,353.29	12,474.00	52.42	53.82	89.62	-1,805.11	-243.23	469.00	407.27	61.73	7.597	
14,000.00	12,006.00	14,453.29	12,474.00	53.39	54.78	89.62	-1,905.11	-242.57	469.00	406.45	62.56	7.497	
14,100.00	12,006.00	14,553.29	12,474.00	54.39	55.76	89.62	-2,005.11	-241.91	469.00	405.60	63.41	7.397	
14,200.00	12,006.00	14,653.29	12,474.00	55.43	56.78	89.62	-2,105.10	-241.26	469.00	404.72	64.28	7.296	
14,300.00	12,006.00	14,753.29	12,474.00	56.49	57.83	89.62	-2,205.10	-240.60	469.00	403.82	65.18	7.195	
14,400.00	12,006.00	14,853.29	12,474.00	57.58	58.91	89.62	-2,305.10	-239.94	469.00	402.89	66.11	7.094	
14,500.00	12,006.00	14,953.29	12,474.00	58.70	60.01	89.62	-2,405.10	-239.28	469.00	401.94	67.06	6.993	
14,600.00	12,006.00	15,053.29	12,474.00	59.84	61.14	89.62	-2,505.10	-238.62	469.00	400.96	68.04	6.893	
14,700.00	12,006.00	15,153.29	12,474.00	61.01	62.29	89.62	-2,605.09	-237.97	469.00	399.97	69.04	6.794	
14,800.00	12,006.00	15,253.29	12,474.00	62.19	63.46	89.62	-2,705.09	-237.31	469.00	398.95	70.05	6.695	
14,900.00	12,006.00	15,353.29	12,474.00	63.40	64.66	89.62	-2,805.09	-236.65	469.00	397.91	71.09	6.597	
15,000.00	12,006.00	15,453.29	12,474.00	64.63	65.87	89.62	-2,905.09	-235.99	469.00	396.85	72.15	6.501	
15,100.00	12,006.00	15,553.29	12,474.00	65.88	67.11	89.62	-3,005.09	-235.34	469.00	395.78	73.22	6.405	
15,200.00	12,006.00	15,653.29	12,474.00	67.14	68.36	89.62	-3,105.08	-234.68	469.00	394.69	74.32	6.311	
15,300.00	12,006.00	15,753.29	12,474.00	68.42	69.62	89.62	-3,205.08	-234.02	469.00	393.58	75.42	6.218	
15,400.00	12,006.00	15,853.29	12,474.00	69.72	70.91	89.62	-3,305.08	-233.36	469.00	392.45	76.55	6.127	
15,500.00	12,006.00	15,953.29	12,474.00	71.03	72.20	89.62	-3,405.08	-232.70	469.00	391.31	77.69	6.037	
15,600.00	12,006.00	16,053.29	12,474.00	72.35	73.52	89.62	-3,505.07	-232.05	469.00	390.15	78.85	5.948	
15,700.00	12,006.00	16,153.29	12,474.00	73.69	74.84	89.62	-3,605.07	-231.39	469.00	388.98	80.02	5.861	
15,800.00	12,006.00	16,253.29	12,474.00	75.04	76.18	89.62	-3,705.07	-230.73	469.00	387.80	81.20	5.776	
15,900.00	12,006.00	16,353.29	12,474.00	76.41	77.53	89.62	-3,805.07	-230.07	469.00	386.60	82.40	5.692	
16,000.00	12,006.00	16,453.29	12,474.00	77.78	78.89	89.62	-3,905.07	-229.41	469.00	385.40	83.61	5.610	
16,100.00	12,006.00	16,553.29	12,474.00	79.16	80.27	89.62	-4,005.06	-228.76	469.00	384.17	84.83	5.529	
16,200.00	12,006.00	16,653.29	12,474.00	80.56	81.65	89.62	-4,105.06	-228.10	469.00	382.94	86.06	5.450	
16,300.00	12,006.00	16,753.29	12,474.00	81.96	83.04	89.62	-4,205.06	-227.44	469.00	381.70	87.30	5.372	
16,400.00	12,006.00	16,853.29	12,474.00	83.38	84.44	89.62	-4,305.06	-226.78	469.00	380.45	88.55	5.296	
16,500.00	12,006.00	16,953.29	12,474.00	84.80	85.86	89.62	-4,405.05	-226.12	469.00	379.18	89.82	5.222	
16,600.00	12,006.00	17,053.29	12,474.00	86.23	87.28	89.62	-4,505.05	-225.47	469.00	377.91	91.09	5.149	
16,700.00	12,006.00	17,153.29	12,474.00	87.67	88.70	89.62	-4,605.05	-224.81	469.00	376.63	92.37	5.077	
16,778.77	12,006.00	17,232.06	12,474.00	88.80	89.83	0.00	-4,683.82	-224.29	469.00	375.62	93.38	5.022	
16,778.77	12,006.00	17,232.07	12,474.00	88.80	89.83	0.00	-4,683.82	-224.29	469.00	375.62	93.38	5.022	
16,779.28	12,006.00	17,232.07	12,474.00	88.82	89.83	-0.38	-4,683.82	-224.29	469.00	375.62	93.38	5.023	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #1H - Wellbore #1 - Surveys													Offset Site Error: 0.00 usft
Survey Program: 100-GYRO-NS, 10598-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
0.00	0.00	0.00	0.00	0.00	0.00	-165.12	-4,600.47	-1,222.01	4,760.04				
100.00	100.00	83.45	83.45	0.13	0.12	-165.13	-4,600.46	-1,221.94	4,759.98	4,759.73	0.25	N/A	
200.00	200.00	186.31	186.30	0.49	0.45	-165.13	-4,600.48	-1,221.49	4,759.88	4,758.95	0.93	5,105.780	
300.00	300.00	286.48	286.48	0.85	0.80	-165.14	-4,600.52	-1,220.83	4,759.76	4,758.11	1.64	2,900.543	
365.28	365.28	345.78	345.78	1.08	1.01	-165.14	-4,600.54	-1,220.58	4,759.71	4,757.62	2.08	2,286.091	
400.00	400.00	376.51	376.51	1.20	1.11	-165.14	-4,600.60	-1,220.42	4,759.72	4,757.41	2.31	2,057.108	
500.00	500.00	479.80	479.79	1.56	1.48	-165.15	-4,600.87	-1,219.77	4,759.81	4,756.78	3.03	1,569.378	
600.00	600.00	576.46	576.45	1.92	1.81	-165.16	-4,601.02	-1,219.27	4,759.84	4,756.11	3.73	1,276.527	
700.00	700.00	680.83	680.82	2.28	2.18	-165.17	-4,601.25	-1,218.68	4,759.90	4,755.45	4.45	1,069.254	
744.47	744.47	724.99	724.97	2.44	2.33	-165.17	-4,601.33	-1,218.34	4,759.90	4,755.13	4.77	998.889	
800.00	800.00	776.94	776.92	2.64	2.52	-165.17	-4,601.43	-1,218.05	4,759.92	4,754.77	5.15	925.050	
900.00	900.00	902.19	902.17	3.00	2.96	-165.18	-4,601.41	-1,217.51	4,759.81	4,753.87	5.94	801.161	
1,000.00	1,000.00	1,002.67	1,002.66	3.35	3.31	-165.18	-4,601.05	-1,217.12	4,759.36	4,752.71	6.65	715.638	
1,100.00	1,100.00	1,122.39	1,122.37	3.71	3.72	-165.18	-4,600.20	-1,216.85	4,758.60	4,751.18	7.43	640.705	
1,200.00	1,200.00	1,211.11	1,211.08	4.07	4.03	-165.18	-4,599.47	-1,216.99	4,757.85	4,749.75	8.10	587.689	
1,238.20	1,238.20	1,246.28	1,246.25	4.21	4.16	-165.18	-4,599.21	-1,217.13	4,757.72	4,749.37	8.36	569.400	
1,300.00	1,299.99	1,304.62	1,304.59	4.43	4.36	-165.18	-4,598.82	-1,217.38	4,758.04	4,749.26	8.78	541.855	
1,400.00	1,399.96	1,430.52	1,430.49	4.79	4.80	-165.18	-4,597.57	-1,218.06	4,759.48	4,749.90	9.58	496.848	
1,500.00	1,499.86	1,530.19	1,530.14	5.15	5.15	-165.19	-4,596.23	-1,218.87	4,762.18	4,751.89	10.29	462.946	
1,600.00	1,599.68	1,624.76	1,624.70	5.51	5.48	-165.22	-4,595.16	-1,219.46	4,766.55	4,755.57	10.98	434.241	
1,600.23	1,599.90	1,625.03	1,624.98	5.51	5.48	-165.22	-4,595.16	-1,219.46	4,766.56	4,755.58	10.98	434.171	
1,700.00	1,699.43	1,753.00	1,752.93	5.87	5.92	-165.24	-4,593.29	-1,220.56	4,771.44	4,759.65	11.78	404.891	
1,800.00	1,799.19	1,851.19	1,851.09	6.23	6.27	-165.27	-4,591.38	-1,221.39	4,775.85	4,763.36	12.49	382.431	
1,900.00	1,898.94	1,949.39	1,949.28	6.59	6.61	-165.30	-4,589.79	-1,222.31	4,780.58	4,767.39	13.19	362.375	
2,000.00	1,998.70	2,058.30	2,058.16	6.95	6.99	-165.31	-4,587.58	-1,223.64	4,785.00	4,771.06	13.93	343.391	
2,100.00	2,098.46	2,189.11	2,188.94	7.32	7.45	-165.33	-4,584.77	-1,224.87	4,789.28	4,774.52	14.75	324.623	
2,200.00	2,198.21	2,279.48	2,279.26	7.69	7.77	-165.35	-4,582.37	-1,226.01	4,793.10	4,777.67	15.43	310.594	
2,300.00	2,297.97	2,358.31	2,358.06	8.05	8.04	-165.38	-4,580.52	-1,227.17	4,797.29	4,781.22	16.07	298.515	
2,400.00	2,397.72	2,486.45	2,486.16	8.42	8.49	-165.39	-4,577.82	-1,228.76	4,801.70	4,784.82	16.88	284.441	
2,500.00	2,497.48	2,581.14	2,580.81	8.79	8.83	-165.41	-4,575.25	-1,230.11	4,805.52	4,787.94	17.58	273.418	
2,600.00	2,597.24	2,665.51	2,665.14	9.16	9.12	-165.43	-4,573.15	-1,231.53	4,809.61	4,791.38	18.23	263.769	
2,700.00	2,696.99	2,767.55	2,767.15	9.52	9.48	-165.44	-4,570.85	-1,233.22	4,813.93	4,794.98	18.95	253.973	
2,800.00	2,796.75	2,878.69	2,878.24	9.89	9.87	-165.46	-4,568.25	-1,234.45	4,818.03	4,798.32	19.71	244.488	
2,900.00	2,896.50	2,963.58	2,963.11	10.26	10.17	-165.49	-4,566.29	-1,235.23	4,822.12	4,801.75	20.37	236.764	
3,000.00	2,996.26	3,068.86	3,068.35	10.63	10.53	-165.50	-4,564.05	-1,236.66	4,826.49	4,805.39	21.10	228.759	
3,100.00	3,096.02	3,179.65	3,179.11	11.00	10.92	-165.53	-4,561.47	-1,237.59	4,830.52	4,808.67	21.85	221.078	
3,200.00	3,195.77	3,289.76	3,289.18	11.37	11.31	-165.56	-4,558.88	-1,237.82	4,834.39	4,811.79	22.60	213.923	
3,300.00	3,295.53	3,388.52	3,387.91	11.74	11.65	-165.59	-4,556.47	-1,237.93	4,838.14	4,814.84	23.31	207.575	
3,400.00	3,395.29	3,458.07	3,457.45	12.11	11.90	-165.62	-4,554.99	-1,237.97	4,842.20	4,818.29	23.91	202.480	
3,500.00	3,495.04	3,536.36	3,535.73	12.48	12.17	-165.66	-4,553.88	-1,238.03	4,846.91	4,822.36	24.55	197.421	
3,600.00	3,594.80	3,675.92	3,675.27	12.85	12.66	-165.70	-4,551.79	-1,237.92	4,851.61	4,826.21	25.40	190.973	
3,700.00	3,694.55	3,768.91	3,768.25	13.22	12.98	-165.73	-4,549.82	-1,237.60	4,855.59	4,829.49	26.09	186.082	
3,800.00	3,794.31	3,870.47	3,869.79	13.59	13.34	-165.77	-4,548.00	-1,237.17	4,859.85	4,833.03	26.81	181.248	
3,900.00	3,894.07	3,947.67	3,946.98	13.96	13.61	-165.81	-4,546.52	-1,237.20	4,864.12	4,836.68	27.45	177.223	
4,000.00	3,993.82	4,019.70	4,019.00	14.34	13.86	-165.84	-4,545.64	-1,237.43	4,869.10	4,841.04	28.06	173.523	
4,100.00	4,093.58	4,120.18	4,119.47	14.71	14.21	-165.88	-4,544.51	-1,237.80	4,874.20	4,845.43	28.78	169.387	
4,200.00	4,193.33	4,200.00	4,199.29	15.08	14.49	-165.91	-4,543.96	-1,237.88	4,879.65	4,850.23	29.42	165.881	
4,300.00	4,293.09	4,303.25	4,302.54	15.45	14.85	-165.95	-4,543.50	-1,237.72	4,885.29	4,855.15	30.14	162.076	
4,400.00	4,392.85	4,397.13	4,396.42	15.82	15.18	-165.99	-4,543.04	-1,237.53	4,890.88	4,860.04	30.83	158.621	
4,500.00	4,492.60	4,523.06	4,522.34	16.19	15.62	-166.04	-4,542.19	-1,236.38	4,896.08	4,864.44	31.64	154.740	
4,600.00	4,592.36	4,600.00	4,599.26	16.56	15.89	-166.10	-4,542.02	-1,234.87	4,901.49	4,869.22	32.27	151.887	
4,700.00	4,692.12	4,681.48	4,680.72	16.94	16.18	-166.16	-4,542.25	-1,233.02	4,907.32	4,874.41	32.92	149.087	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #1H - Wellbore #1 - Surveys													Offset Site Error: 0.00 usft	
Survey Program: 100-GYRO-NS, 10598-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Distance								
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
4,800.00	4,791.87	4,754.58	4,753.80	17.31	16.43	-166.22	-4,542.71	-1,231.35	4,913.52	4,879.99	33.53	146.542		
4,900.00	4,891.63	4,833.52	4,832.71	17.68	16.71	-166.29	-4,543.76	-1,229.25	4,920.30	4,886.14	34.16	144.019		
5,000.00	4,991.38	4,928.02	4,927.13	18.05	17.04	-166.37	-4,545.41	-1,225.81	4,927.26	4,892.40	34.86	141.360		
5,100.00	5,091.14	5,018.02	5,017.03	18.42	17.35	-166.45	-4,547.25	-1,222.17	4,934.43	4,898.89	35.53	138.874		
5,200.00	5,190.90	5,125.55	5,124.47	18.79	17.73	-166.54	-4,549.37	-1,218.14	4,941.61	4,905.34	36.27	136.237		
5,300.00	5,290.65	5,243.55	5,242.39	19.17	18.14	-166.63	-4,551.27	-1,214.08	4,948.53	4,911.48	37.05	133.559		
5,400.00	5,390.41	5,354.80	5,353.58	19.54	18.53	-166.71	-4,552.50	-1,210.96	4,955.10	4,917.30	37.80	131.071		
5,500.00	5,490.16	5,447.49	5,446.24	19.91	18.85	-166.77	-4,553.37	-1,208.78	4,961.63	4,923.14	38.49	128.908		
5,600.00	5,589.92	5,543.15	5,541.88	20.28	19.19	-166.83	-4,554.36	-1,207.13	4,968.39	4,929.21	39.19	126.793		
5,700.00	5,689.68	5,636.81	5,635.52	20.65	19.51	-166.89	-4,555.30	-1,205.22	4,975.08	4,935.21	39.87	124.773		
5,800.00	5,789.43	5,715.16	5,713.84	21.03	19.79	-166.95	-4,556.48	-1,203.53	4,982.20	4,941.70	40.50	123.006		
5,849.08	5,838.40	5,771.62	5,770.29	21.21	19.98	-166.98	-4,557.30	-1,202.60	4,985.74	4,944.86	40.88	121.960		
5,900.00	5,889.21	5,826.88	5,825.54	21.40	20.18	-167.01	-4,557.95	-1,202.03	4,989.05	4,947.79	41.26	120.923		
6,000.00	5,989.11	5,923.50	5,922.16	21.76	20.51	-167.05	-4,559.03	-1,201.13	4,993.76	4,951.81	41.95	119.033		
6,100.00	6,089.10	6,011.74	6,010.38	22.11	20.82	-167.07	-4,560.34	-1,199.87	4,996.41	4,953.80	42.61	117.252		
6,115.90	6,105.00	6,038.89	6,037.51	22.17	20.92	-167.08	-4,560.74	-1,199.41	4,996.61	4,953.85	42.77	116.835		
6,200.00	6,189.10	6,137.18	6,135.79	22.46	21.26	-167.10	-4,561.78	-1,197.76	4,997.14	4,953.73	43.41	115.115		
6,300.00	6,289.10	6,216.03	6,214.61	22.81	21.53	-167.12	-4,562.84	-1,196.36	4,998.04	4,954.01	44.03	113.506		
6,400.00	6,389.10	15,477.00	11,068.31	23.16	85.41	-102.58	-10.31	-1,513.76	4,922.34	4,863.68	58.66	83.914		
6,500.00	6,489.10	15,477.00	11,068.31	23.51	85.41	-102.58	-10.31	-1,513.76	4,826.98	4,767.83	59.15	81.605		
6,600.00	6,589.10	15,477.00	11,068.31	23.86	85.41	-102.58	-10.31	-1,513.76	4,731.80	4,672.14	59.66	79.313		
6,700.00	6,689.10	15,477.00	11,068.31	24.21	85.41	-102.58	-10.31	-1,513.76	4,636.83	4,576.64	60.19	77.039		
6,800.00	6,789.10	15,477.00	11,068.31	24.56	85.41	-102.58	-10.31	-1,513.76	4,542.08	4,481.34	60.74	74.783		
6,900.00	6,889.10	15,477.00	11,068.31	24.91	85.41	-102.58	-10.31	-1,513.76	4,447.55	4,386.25	61.31	72.545		
7,000.00	6,989.10	15,477.00	11,068.31	25.26	85.41	-102.58	-10.31	-1,513.76	4,353.27	4,291.37	61.90	70.327		
7,100.00	7,089.10	15,477.00	11,068.31	25.61	85.41	-102.58	-10.31	-1,513.76	4,259.25	4,196.74	62.52	68.129		
7,200.00	7,189.10	15,477.00	11,068.31	25.96	85.41	-102.58	-10.31	-1,513.76	4,165.51	4,102.35	63.16	65.951		
7,300.00	7,289.10	15,477.00	11,068.31	26.31	85.41	-102.58	-10.31	-1,513.76	4,072.07	4,008.24	63.83	63.794		
7,400.00	7,389.10	15,477.00	11,068.31	26.67	85.41	-102.58	-10.31	-1,513.76	3,978.95	3,914.42	64.53	61.658		
7,500.00	7,489.10	15,477.00	11,068.31	27.02	85.41	-102.58	-10.31	-1,513.76	3,886.17	3,820.90	65.26	59.545		
7,600.00	7,589.10	15,477.00	11,068.31	27.37	85.41	-102.58	-10.31	-1,513.76	3,793.75	3,727.72	66.03	57.455		
7,700.00	7,689.10	15,477.00	11,068.31	27.72	85.41	-102.58	-10.31	-1,513.76	3,701.73	3,634.90	66.83	55.389		
7,800.00	7,789.10	15,477.00	11,068.31	28.07	85.41	-102.58	-10.31	-1,513.76	3,610.13	3,542.46	67.67	53.348		
7,900.00	7,889.10	15,477.00	11,068.31	28.43	85.41	-102.58	-10.31	-1,513.76	3,518.99	3,450.44	68.55	51.333		
8,000.00	7,989.10	15,477.00	11,068.31	28.78	85.41	-102.58	-10.31	-1,513.76	3,428.35	3,358.87	69.48	49.344		
8,100.00	8,089.10	15,477.00	11,068.31	29.13	85.41	-102.58	-10.31	-1,513.76	3,338.24	3,267.79	70.45	47.384		
8,200.00	8,189.10	15,477.00	11,068.31	29.48	85.41	-102.58	-10.31	-1,513.76	3,248.71	3,177.23	71.47	45.453		
8,300.00	8,289.10	15,477.00	11,068.31	29.84	85.41	-102.58	-10.31	-1,513.76	3,159.80	3,087.25	72.55	43.552		
8,400.00	8,389.10	15,477.00	11,068.31	30.19	85.41	-102.58	-10.31	-1,513.76	3,071.58	2,997.89	73.69	41.683		
8,500.00	8,489.10	15,477.00	11,068.31	30.54	85.41	-102.58	-10.31	-1,513.76	2,984.10	2,909.21	74.89	39.847		
8,600.00	8,589.10	15,477.00	11,068.31	30.90	85.41	-102.58	-10.31	-1,513.76	2,897.43	2,821.28	76.15	38.047		
8,700.00	8,689.10	15,477.00	11,068.31	31.25	85.41	-102.58	-10.31	-1,513.76	2,811.65	2,734.16	77.49	36.283		
8,800.00	8,789.10	15,477.00	11,068.31	31.60	85.41	-102.58	-10.31	-1,513.76	2,726.84	2,647.93	78.90	34.558		
8,900.00	8,889.10	15,477.00	11,068.31	31.96	85.41	-102.58	-10.31	-1,513.76	2,643.08	2,562.68	80.40	32.874		
9,000.00	8,989.10	15,477.00	11,068.31	32.31	85.41	-102.58	-10.31	-1,513.76	2,560.50	2,478.52	81.98	31.233		
9,100.00	9,089.10	15,477.00	11,068.31	32.66	85.41	-102.58	-10.31	-1,513.76	2,479.20	2,395.55	83.65	29.638		
9,200.00	9,189.10	15,477.00	11,068.31	33.02	85.41	-102.58	-10.31	-1,513.76	2,399.31	2,313.89	85.41	28.090		
9,300.00	9,289.10	15,477.00	11,068.31	33.37	85.41	-102.58	-10.31	-1,513.76	2,320.98	2,233.70	87.28	26.593		
9,400.00	9,389.10	15,477.00	11,068.31	33.73	85.41	-102.58	-10.31	-1,513.76	2,244.37	2,155.12	89.24	25.149		
9,500.00	9,489.10	15,477.00	11,068.31	34.08	85.41	-102.58	-10.31	-1,513.76	2,169.66	2,078.35	91.31	23.761		
9,600.00	9,589.10	15,477.00	11,068.31	34.43	85.41	-102.58	-10.31	-1,513.76	2,097.07	2,003.59	93.48	22.433		
9,700.00	9,689.10	15,477.00	11,068.31	34.79	85.41	-102.58	-10.31	-1,513.76	2,026.81	1,931.06	95.75	21.168		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #1H - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 100-GYRO-NS, 10598-MWD													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference Offset (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
9,800.00	9,789.10	15,477.00	11,068.31	35.14	85.41	-102.58	-10.31	-1,513.76	1,959.14	1,861.02	98.11	19.968		
9,900.00	9,889.10	15,477.00	11,068.31	35.50	85.41	-102.58	-10.31	-1,513.76	1,894.33	1,793.77	100.56	18.838		
10,000.00	9,989.10	15,477.00	11,068.31	35.85	85.41	-102.58	-10.31	-1,513.76	1,832.68	1,729.61	103.07	17.781		
10,100.00	10,089.10	15,477.00	11,068.31	36.21	85.41	-102.58	-10.31	-1,513.76	1,774.54	1,668.91	105.63	16.799		
10,200.00	10,189.10	15,477.00	11,068.31	36.56	85.41	-102.58	-10.31	-1,513.76	1,720.25	1,612.04	108.21	15.897		
10,300.00	10,289.10	15,477.00	11,068.31	36.92	85.41	-102.58	-10.31	-1,513.76	1,670.18	1,559.41	110.77	15.078		
10,400.00	10,389.10	15,477.00	11,068.31	37.27	85.41	-102.58	-10.31	-1,513.76	1,624.74	1,511.46	113.27	14.343		
10,500.00	10,489.10	15,477.00	11,068.31	37.63	85.41	-102.58	-10.31	-1,513.76	1,584.31	1,468.64	115.66	13.698		
10,600.00	10,589.10	15,477.00	11,068.31	37.98	85.41	-102.58	-10.31	-1,513.76	1,549.28	1,431.40	117.88	13.143		
10,700.00	10,689.10	15,477.00	11,068.31	38.34	85.41	-102.58	-10.31	-1,513.76	1,520.05	1,400.17	119.88	12.680		
10,800.00	10,789.10	15,477.00	11,068.31	38.69	85.41	-102.58	-10.31	-1,513.76	1,496.93	1,375.35	121.58	12.312		
10,900.00	10,889.10	15,477.00	11,068.31	39.05	85.41	-102.58	-10.31	-1,513.76	1,480.22	1,357.27	122.95	12.039		
11,000.00	10,989.10	15,477.00	11,068.31	39.40	85.41	-102.58	-10.31	-1,513.76	1,470.14	1,346.21	123.93	11.863		
11,098.71	11,087.81	15,477.00	11,068.31	39.75	85.41	-102.58	-10.31	-1,513.76	1,466.82	1,342.33	124.50	11.782		
11,100.00	11,089.10	15,477.00	11,068.31	39.76	85.41	-102.58	-10.31	-1,513.76	1,466.82	1,342.32	124.50	11.781 SF		
11,200.00	11,189.10	15,477.00	11,068.31	40.11	85.41	-102.58	-10.31	-1,513.76	1,470.32	1,345.66	124.65	11.795		
11,300.00	11,289.10	15,477.00	11,068.31	40.47	85.41	-102.58	-10.31	-1,513.76	1,480.57	1,356.18	124.39	11.903		
11,400.00	11,389.10	15,477.00	11,068.31	40.82	85.41	-102.58	-10.31	-1,513.76	1,497.45	1,373.71	123.74	12.102		
11,443.94	11,433.04	15,477.00	11,068.31	40.98	85.41	-102.58	-10.31	-1,513.76	1,506.90	1,383.56	123.34	12.217		
11,450.00	11,439.10	15,477.00	11,068.31	41.00	85.41	-102.58	-10.31	-1,513.76	1,508.29	1,385.01	123.28	12.235		
11,500.00	11,489.01	15,477.00	11,068.31	41.16	85.41	-102.48	-10.31	-1,513.76	1,519.63	1,396.90	122.73	12.382		
11,550.00	11,538.49	15,477.00	11,068.31	41.31	85.41	-102.23	-10.31	-1,513.76	1,530.74	1,408.62	122.12	12.535		
11,600.00	11,587.17	15,477.00	11,068.31	41.45	85.41	-101.82	-10.31	-1,513.76	1,541.53	1,420.07	121.46	12.692		
11,650.00	11,634.68	15,477.00	11,068.31	41.58	85.41	-101.26	-10.31	-1,513.76	1,551.92	1,431.18	120.74	12.853		
11,700.00	11,680.66	15,477.00	11,068.31	41.70	85.41	-100.54	-10.31	-1,513.76	1,561.85	1,441.86	119.99	13.016		
11,750.00	11,724.75	15,477.00	11,068.31	41.81	85.41	-99.67	-10.31	-1,513.76	1,571.26	1,452.05	119.21	13.181		
11,800.00	11,766.62	15,477.00	11,068.31	41.91	85.41	-98.64	-10.31	-1,513.76	1,580.07	1,461.67	118.40	13.345		
11,850.00	11,806.95	15,477.00	11,068.31	42.00	85.41	-97.47	-10.31	-1,513.76	1,588.24	1,470.65	117.59	13.507		
11,900.00	11,842.44	15,477.00	11,068.31	42.09	85.41	-96.15	-10.31	-1,513.76	1,595.71	1,478.94	116.76	13.666		
11,950.00	11,875.82	15,477.00	11,068.31	42.17	85.41	-94.69	-10.31	-1,513.76	1,602.43	1,486.48	115.95	13.820		
12,000.00	11,905.83	15,477.00	11,068.31	42.25	85.41	-93.10	-10.31	-1,513.76	1,608.36	1,493.21	115.15	13.968		
12,050.00	11,932.24	15,460.97	11,068.34	42.34	85.17	-92.06	-26.33	-1,513.20	1,613.40	1,499.20	114.20	14.128		
12,100.00	11,954.85	15,413.27	11,068.46	42.44	84.46	-92.24	-74.01	-1,511.53	1,616.62	1,503.65	112.97	14.311		
12,150.00	11,973.49	15,356.84	11,068.95	42.53	83.61	-92.72	-130.39	-1,509.40	1,617.43	1,505.71	111.72	14.477		
12,200.00	11,988.01	15,309.57	11,069.63	42.63	82.91	-92.76	-177.61	-1,507.52	1,615.70	1,505.03	110.67	14.599		
12,250.00	11,998.31	15,269.65	11,070.13	42.73	82.31	-92.43	-217.50	-1,506.05	1,611.74	1,501.94	109.80	14.679		
12,300.00	12,004.31	15,228.94	11,070.53	42.84	81.71	-92.11	-258.19	-1,504.71	1,605.55	1,496.53	109.02	14.727		
12,343.94	12,006.00	15,192.16	11,070.71	42.93	81.16	-91.85	-294.95	-1,503.57	1,598.24	1,489.83	108.40	14.743		
12,400.00	12,006.00	15,150.66	11,070.68	43.06	80.55	-91.26	-336.43	-1,502.29	1,588.37	1,480.63	107.74	14.743		
12,500.00	12,006.00	14,989.04	11,073.23	43.33	78.16	-94.10	-497.87	-1,495.35	1,570.63	1,464.93	105.70	14.859		
12,600.00	12,006.00	14,895.70	11,075.35	43.66	76.78	-93.88	-591.04	-1,490.22	1,554.77	1,450.25	104.52	14.875		
12,700.00	12,006.00	14,792.07	11,077.02	44.05	75.26	-94.11	-694.50	-1,484.49	1,542.10	1,438.77	103.33	14.924		
12,800.00	12,006.00	14,696.77	11,078.51	44.48	73.87	-93.93	-789.62	-1,478.70	1,531.84	1,429.50	102.33	14.969		
12,900.00	12,006.00	14,586.26	11,079.97	44.96	72.27	-94.43	-899.91	-1,471.99	1,524.54	1,423.27	101.27	15.054		
12,927.98	12,006.00	14,559.75	11,080.39	45.11	71.89	-94.37	-926.36	-1,470.23	1,522.83	1,421.78	101.05	15.070		
13,000.00	12,006.00	14,502.00	11,080.94	45.50	71.06	-93.71	-983.99	-1,466.58	1,519.14	1,418.52	100.62	15.098		
13,100.00	12,006.00	14,391.07	11,081.09	46.08	69.47	-94.23	-1,094.68	-1,459.37	1,514.41	1,414.73	99.67	15.194		
13,200.00	12,006.00	14,274.71	11,080.71	46.72	67.81	-95.02	-1,210.65	-1,449.82	1,508.57	1,409.92	98.65	15.292		
13,300.00	12,006.00	14,154.38	11,080.93	47.40	66.11	-96.01	-1,330.38	-1,437.83	1,500.95	1,403.35	97.60	15.378		
13,400.00	12,006.00	14,066.51	11,081.28	48.13	64.88	-95.44	-1,417.83	-1,429.31	1,493.52	1,396.47	97.05	15.389		
13,500.00	12,006.00	13,980.20	11,081.25	48.91	63.68	-94.80	-1,503.80	-1,421.56	1,486.94	1,390.36	96.57	15.397		
13,600.00	12,006.00	13,892.26	11,080.55	49.73	62.48	-94.22	-1,591.42	-1,414.20	1,481.31	1,385.19	96.12	15.412		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #1H - Wellbore #1 - Surveys														Offset Site Error:	0.00 usft
Survey Program: 100-GYRO-NS, 10598-MVD														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
13,700.00	12,006.00	13,792.28	11,080.45	50.59	61.13	-94.23	-1,691.12	-1,406.74	1,475.99	1,380.41	95.58	15.442			
13,800.00	12,006.00	13,682.12	11,080.88	51.49	59.66	-94.75	-1,801.00	-1,398.83	1,470.64	1,375.66	94.98	15.484			
13,900.00	12,006.00	13,572.66	11,081.57	52.42	58.21	-95.23	-1,910.04	-1,389.32	1,463.89	1,369.49	94.40	15.507			
14,000.00	12,006.00	13,459.29	11,082.08	53.39	56.74	-95.92	-2,022.96	-1,379.18	1,457.16	1,363.36	93.81	15.534			
14,100.00	12,006.00	13,368.36	11,084.03	54.39	55.58	-95.48	-2,113.53	-1,371.39	1,449.67	1,356.06	93.60	15.487			
14,200.00	12,006.00	13,281.75	11,085.21	55.43	54.49	-94.82	-2,199.87	-1,364.60	1,443.20	1,349.70	93.50	15.436			
14,300.00	12,006.00	13,191.93	11,085.77	56.49	53.38	-94.32	-2,289.43	-1,357.91	1,437.52	1,344.14	93.38	15.395			
14,400.00	12,006.00	13,098.58	11,085.69	57.58	52.26	-93.99	-2,382.53	-1,351.15	1,432.44	1,339.19	93.25	15.362			
14,500.00	12,006.00	12,966.32	11,086.36	58.70	50.70	-95.67	-2,514.42	-1,341.25	1,426.96	1,334.29	92.67	15.398			
14,600.00	12,006.00	12,843.51	11,089.67	59.84	49.29	-96.87	-2,636.66	-1,329.98	1,418.58	1,326.30	92.28	15.372			
14,700.00	12,006.00	12,751.53	11,091.65	61.01	48.27	-96.48	-2,728.19	-1,321.16	1,410.29	1,317.98	92.31	15.278			
14,800.00	12,006.00	12,648.64	11,092.42	62.19	47.15	-96.67	-2,830.41	-1,309.50	1,401.57	1,309.40	92.17	15.206			
14,900.00	12,006.00	12,568.47	11,091.20	63.40	46.31	-95.64	-2,910.02	-1,300.06	1,393.97	1,301.64	92.33	15.098			
15,000.00	12,006.00	12,466.35	11,090.59	64.63	45.28	-95.77	-3,011.58	-1,289.38	1,386.85	1,294.58	92.27	15.030			
15,100.00	12,006.00	12,366.77	11,090.78	65.88	44.32	-95.77	-3,110.66	-1,279.52	1,379.69	1,287.36	92.34	14.942			
15,200.00	12,006.00	12,270.77	11,090.94	67.14	43.42	-95.58	-3,206.20	-1,270.05	1,372.60	1,280.13	92.47	14.843			
15,300.00	12,006.00	12,166.36	11,090.91	68.42	42.50	-95.85	-3,310.13	-1,260.16	1,365.97	1,273.41	92.57	14.756			
15,400.00	12,006.00	12,058.78	11,092.79	69.72	41.61	-96.30	-3,417.19	-1,249.73	1,357.98	1,265.26	92.72	14.646			
15,500.00	12,006.00	11,970.42	11,093.93	71.03	40.93	-95.67	-3,505.17	-1,241.61	1,350.71	1,257.56	93.15	14.501			
15,600.00	12,006.00	11,875.79	11,094.61	72.35	40.25	-95.38	-3,599.42	-1,233.16	1,344.04	1,250.50	93.54	14.368			
15,700.00	12,006.00	11,779.91	11,095.47	73.69	39.62	-95.17	-3,694.95	-1,225.06	1,337.64	1,243.64	93.99	14.231			
15,800.00	12,006.00	11,673.56	11,096.33	75.04	38.98	-95.56	-3,800.92	-1,216.19	1,331.39	1,237.01	94.38	14.106			
15,900.00	12,006.00	11,579.95	11,098.04	76.41	38.48	-95.21	-3,894.21	-1,208.58	1,324.64	1,229.65	94.99	13.944			
16,000.00	12,006.00	11,462.54	11,099.57	77.78	37.94	-96.25	-4,011.22	-1,199.00	1,318.30	1,222.88	95.42	13.816			
16,100.00	12,006.00	11,386.00	11,101.12	79.16	37.62	-94.89	-4,087.43	-1,192.11	1,310.98	1,214.70	96.28	13.616			
16,200.00	12,006.00	11,354.00	11,099.84	80.56	37.51	-90.85	-4,119.29	-1,189.56	1,307.94	1,210.43	97.51	13.413			
16,208.24	12,006.00	11,354.00	11,099.84	80.67	37.51	-90.36	-4,119.29	-1,189.56	1,307.92	1,210.28	97.64	13.396 CC, ES			
16,300.00	12,006.00	11,323.00	11,098.88	81.96	37.41	-86.72	-4,150.06	-1,187.19	1,309.77	1,211.12	98.65	13.277			
16,400.00	12,006.00	11,289.00	11,091.49	83.38	37.30	-82.77	-4,183.51	-1,184.49	1,316.42	1,216.79	99.64	13.212			
16,500.00	12,006.00	11,257.00	11,084.16	84.80	37.21	-78.73	-4,214.56	-1,182.07	1,328.27	1,227.76	100.51	13.216			
16,600.00	12,006.00	11,226.00	11,075.01	86.23	37.13	-74.71	-4,244.10	-1,180.09	1,345.43	1,244.18	101.26	13.287			
16,700.00	12,006.00	11,180.80	11,058.69	87.67	37.03	-71.48	-4,286.13	-1,176.94	1,367.15	1,265.45	101.70	13.443			
16,778.77	12,006.00	11,163.00	11,051.52	88.80	37.00	-68.15	-4,302.36	-1,175.61	1,387.34	1,285.16	102.18	13.578			
16,779.28	12,006.00	11,163.00	11,051.52	88.82	37.00	-68.12	-4,302.36	-1,175.61	1,387.48	1,285.68	101.80	13.629			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #2H - Wellbore #1 - Surveys														Offset Site Error:	0.00 usft
Survey Program: 100-MWD														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N-S (usft)	+E-W (usft)				Between Centres (usft)	Between Ellipses (usft)		
0.00	0.00	0.00	0.00	0.00	0.00	179.92	-4,730.34	6.22	4,730.38						
100.00	100.00	86.61	86.61	0.13	0.13	179.92	-4,730.30	6.34	4,730.30	4,730.05	0.26	N/A			
200.00	200.00	184.06	184.06	0.49	0.45	179.92	-4,730.20	6.58	4,730.21	4,729.28	0.93	5,059.550			
300.00	300.00	281.89	281.89	0.85	0.80	179.92	-4,730.18	6.80	4,730.18	4,728.54	1.64	2,877.668			
315.81	315.81	297.41	297.41	0.90	0.85	179.92	-4,730.18	6.85	4,730.18	4,728.43	1.76	2,693.732			
400.00	400.00	376.55	376.55	1.20	1.14	179.91	-4,730.22	7.15	4,730.22	4,727.88	2.34	2,020.843			
500.00	500.00	473.58	473.58	1.56	1.48	179.91	-4,730.35	7.59	4,730.37	4,727.32	3.05	1,553.269			
600.00	600.00	565.81	565.81	1.92	1.81	179.90	-4,730.57	7.96	4,730.60	4,726.87	3.73	1,267.387			
700.00	700.00	667.42	667.42	2.28	2.17	179.90	-4,730.93	8.49	4,730.96	4,726.51	4.45	1,062.364			
800.00	800.00	772.35	772.34	2.64	2.55	179.89	-4,731.18	8.92	4,731.20	4,726.01	5.19	912.185			
900.00	900.00	876.01	876.00	3.00	2.92	179.88	-4,731.34	9.60	4,731.35	4,725.43	5.92	799.691			
1,000.00	1,000.00	1,004.59	1,004.57	3.35	3.38	179.86	-4,731.16	11.29	4,731.23	4,724.49	6.73	702.485			
1,100.00	1,100.00	1,121.78	1,121.75	3.71	3.80	179.84	-4,730.41	13.20	4,730.60	4,723.09	7.51	629.843			
1,200.00	1,200.00	1,248.08	1,248.02	4.07	4.25	179.82	-4,728.89	15.05	4,729.39	4,721.07	8.32	568.687			
1,282.24	1,282.24	1,329.54	1,329.46	4.37	4.53	179.80	-4,727.72	16.33	4,728.77	4,719.87	8.90	531.365			
1,300.00	1,299.99	1,345.00	1,344.91	4.43	4.59	179.80	-4,727.50	16.56	4,728.80	4,719.78	9.02	524.390			
1,400.00	1,399.96	1,429.32	1,429.23	4.79	4.89	179.78	-4,726.49	17.59	4,730.14	4,720.47	9.67	489.038			
1,500.00	1,499.86	1,500.00	1,499.90	5.15	5.13	179.76	-4,725.91	17.70	4,733.58	4,723.30	10.27	460.694			
1,600.00	1,599.68	1,580.04	1,579.94	5.51	5.40	179.75	-4,725.67	17.21	4,739.21	4,728.31	10.90	434.799			
1,600.23	1,599.90	1,580.21	1,580.11	5.51	5.40	179.75	-4,725.67	17.21	4,739.22	4,728.32	10.90	434.746			
1,700.00	1,699.43	1,658.35	1,658.24	5.87	5.66	179.74	-4,725.89	16.55	4,746.23	4,734.71	11.52	412.053			
1,800.00	1,799.19	1,747.05	1,746.95	6.23	5.95	179.72	-4,726.46	15.99	4,753.62	4,741.45	12.17	390.477			
1,900.00	1,898.94	1,842.23	1,842.11	6.59	6.28	179.71	-4,727.18	15.51	4,761.12	4,748.26	12.85	370.372			
2,000.00	1,998.70	1,941.12	1,941.00	6.95	6.61	179.69	-4,728.02	15.10	4,768.72	4,755.17	13.55	351.874			
2,100.00	2,098.46	2,043.55	2,043.43	7.32	6.97	179.67	-4,728.80	14.90	4,776.23	4,761.97	14.27	334.809			
2,200.00	2,198.21	2,145.33	2,145.21	7.69	7.32	179.65	-4,729.60	14.78	4,783.77	4,768.80	14.98	319.361			
2,300.00	2,297.97	2,261.24	2,261.12	8.05	7.73	179.63	-4,730.26	14.72	4,791.10	4,775.36	15.74	304.328			
2,400.00	2,397.72	2,370.58	2,370.45	8.42	8.10	179.61	-4,730.53	14.47	4,798.11	4,781.62	16.48	291.123			
2,500.00	2,497.48	2,469.84	2,469.72	8.79	8.45	179.60	-4,730.71	14.16	4,805.04	4,787.85	17.18	279.630			
2,600.00	2,597.24	2,573.60	2,573.47	9.16	8.80	179.58	-4,730.89	13.76	4,811.97	4,794.06	17.90	268.798			
2,700.00	2,696.99	2,676.23	2,676.10	9.52	9.16	179.56	-4,730.96	13.42	4,818.79	4,800.18	18.62	258.845			
2,800.00	2,796.75	2,779.65	2,779.52	9.89	9.51	179.55	-4,730.98	13.08	4,825.57	4,806.23	19.33	249.585			
2,900.00	2,896.50	2,879.52	2,879.39	10.26	9.86	179.53	-4,730.95	12.78	4,832.29	4,812.25	20.04	241.127			
3,000.00	2,996.26	2,974.26	2,974.13	10.63	10.19	179.51	-4,730.96	12.49	4,839.07	4,818.34	20.73	233.432			
3,100.00	3,096.02	3,067.45	3,067.32	11.00	10.51	179.49	-4,731.10	12.27	4,845.97	4,824.55	21.42	226.276			
3,200.00	3,195.77	3,165.52	3,165.39	11.37	10.86	179.48	-4,731.34	12.17	4,852.98	4,830.86	22.12	219.380			
3,300.00	3,295.53	3,273.72	3,273.59	11.74	11.24	179.45	-4,731.53	12.46	4,859.92	4,837.06	22.86	212.568			
3,400.00	3,395.29	3,375.37	3,375.23	12.11	11.60	179.43	-4,731.56	12.85	4,866.71	4,843.13	23.58	206.389			
3,500.00	3,495.04	3,470.35	3,470.21	12.48	11.93	179.40	-4,731.62	13.16	4,873.55	4,849.27	24.27	200.768			
3,600.00	3,594.80	3,563.66	3,563.53	12.85	12.26	179.38	-4,731.80	13.45	4,880.50	4,855.54	24.96	195.502			
3,700.00	3,694.55	3,658.90	3,658.77	13.22	12.59	179.36	-4,732.10	13.69	4,887.58	4,861.92	25.66	190.467			
3,800.00	3,794.31	3,757.35	3,757.22	13.59	12.94	179.33	-4,732.47	13.84	4,894.72	4,868.35	26.37	185.615			
3,900.00	3,894.07	3,850.97	3,850.83	13.96	13.27	179.31	-4,732.85	13.94	4,901.90	4,874.84	27.06	181.137			
4,000.00	3,993.82	3,949.84	3,949.71	14.34	13.62	179.29	-4,733.42	13.86	4,909.24	4,881.47	27.77	176.772			
4,100.00	4,093.58	4,048.18	4,048.05	14.71	13.97	179.28	-4,733.89	13.50	4,916.48	4,888.00	28.48	172.638			
4,200.00	4,193.33	4,142.30	4,142.16	15.08	14.30	179.26	-4,734.50	13.34	4,923.89	4,894.72	29.17	168.797			
4,300.00	4,293.09	4,281.91	4,281.77	15.45	14.79	179.25	-4,735.08	12.66	4,931.13	4,901.10	30.03	164.231			
4,400.00	4,392.85	4,433.26	4,433.11	15.82	15.31	179.24	-4,733.81	11.86	4,936.96	4,906.05	30.91	159.710			
4,500.00	4,492.60	4,516.42	4,516.27	16.19	15.60	179.21	-4,732.95	12.21	4,942.71	4,911.15	31.56	156.620			
4,600.00	4,592.36	4,600.00	4,599.84	16.56	15.88	179.19	-4,732.41	12.64	4,948.83	4,916.62	32.21	153.655			
4,700.00	4,692.12	4,680.83	4,680.67	16.94	16.17	179.17	-4,732.17	13.04	4,955.30	4,922.45	32.85	150.855			
4,800.00	4,791.87	4,764.95	4,764.78	17.31	16.46	179.13	-4,732.16	14.15	4,962.09	4,928.59	33.50	148.114			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #2H - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 100-MWD													Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Distance		Warning								
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
4,900.00	4,891.63	4,829.87	4,829.67	17.68	16.69	179.09	-4,732.39	16.15	4,969.30	4,935.22	34.09	145.790		
5,000.00	4,991.38	4,900.00	4,899.73	18.05	16.93	179.04	-4,733.43	19.03	4,977.50	4,942.82	34.69	143.497		
5,100.00	5,091.14	4,944.61	4,944.29	18.42	17.09	179.00	-4,734.46	21.02	4,986.46	4,951.27	35.19	141.695		
5,200.00	5,190.90	5,030.14	5,029.71	18.79	17.39	178.94	-4,736.83	24.47	4,996.06	4,960.21	35.85	139.359		
5,300.00	5,290.65	5,181.17	5,180.63	19.17	17.93	178.87	-4,740.34	29.13	5,005.23	4,968.47	36.76	136.156		
5,400.00	5,390.41	5,306.16	5,305.56	19.54	18.37	178.81	-4,742.20	32.31	5,013.54	4,975.97	37.57	133.442		
5,500.00	5,490.16	5,400.00	5,399.36	19.91	18.71	178.77	-4,743.34	34.70	5,021.59	4,983.33	38.26	131.238		
5,600.00	5,589.92	5,479.81	5,479.13	20.28	18.99	178.72	-4,744.50	36.96	5,029.92	4,991.01	38.90	129.296		
5,700.00	5,689.68	5,567.82	5,567.09	20.65	19.30	178.67	-4,746.21	39.59	5,038.69	4,999.12	39.57	127.327		
5,800.00	5,789.43	5,679.58	5,678.79	21.03	19.70	178.62	-4,748.37	42.65	5,047.48	5,007.14	40.33	125.141		
5,849.08	5,838.40	5,729.10	5,728.28	21.21	19.88	178.60	-4,749.22	44.02	5,051.68	5,010.99	40.69	124.157		
5,900.00	5,889.21	5,775.21	5,774.37	21.40	20.04	178.57	-4,750.05	45.27	5,055.75	5,014.72	41.03	123.209		
6,000.00	5,989.11	5,872.36	5,871.46	21.76	20.39	178.53	-4,751.88	47.79	5,061.92	5,020.18	41.74	121.280		
6,100.00	6,089.10	15,660.00	11,101.11	22.11	88.30	164.84	-2.04	2.18	5,040.83	4,988.57	52.26	96.457		
6,115.90	6,105.00	15,660.00	11,101.11	22.17	88.30	164.84	-2.04	2.18	5,024.96	4,972.67	52.29	96.093		
6,200.00	6,189.10	15,660.00	11,101.11	22.46	88.30	164.84	-2.04	2.18	4,941.04	4,888.58	52.46	94.185		
6,300.00	6,289.10	15,660.00	11,101.11	22.81	88.30	164.84	-2.04	2.18	4,841.26	4,788.60	52.66	91.927		
6,400.00	6,389.10	15,660.00	11,101.11	23.16	88.30	164.84	-2.04	2.18	4,741.49	4,688.62	52.87	89.681		
6,500.00	6,489.10	15,660.00	11,101.11	23.51	88.30	164.84	-2.04	2.18	4,641.72	4,588.64	53.08	87.448		
6,600.00	6,589.10	15,660.00	11,101.11	23.86	88.30	164.84	-2.04	2.18	4,541.97	4,488.68	53.29	85.228		
6,700.00	6,689.10	15,660.00	11,101.11	24.21	88.30	164.84	-2.04	2.18	4,442.23	4,388.72	53.51	83.021		
6,800.00	6,789.10	15,660.00	11,101.11	24.56	88.30	164.84	-2.04	2.18	4,342.50	4,288.77	53.73	80.828		
6,900.00	6,889.10	15,660.00	11,101.11	24.91	88.30	164.84	-2.04	2.18	4,242.78	4,188.83	53.95	78.647		
7,000.00	6,989.10	15,660.00	11,101.11	25.26	88.30	164.84	-2.04	2.18	4,143.08	4,088.91	54.17	76.481		
7,100.00	7,089.10	15,660.00	11,101.11	25.61	88.30	164.84	-2.04	2.18	4,043.39	3,988.99	54.40	74.328		
7,200.00	7,189.10	15,660.00	11,101.11	25.96	88.30	164.84	-2.04	2.18	3,943.71	3,889.08	54.63	72.189		
7,300.00	7,289.10	15,660.00	11,101.11	26.31	88.30	164.84	-2.04	2.18	3,844.06	3,789.19	54.86	70.064		
7,400.00	7,389.10	15,660.00	11,101.11	26.67	88.30	164.84	-2.04	2.18	3,744.42	3,689.32	55.10	67.954		
7,500.00	7,489.10	15,660.00	11,101.11	27.02	88.30	164.84	-2.04	2.18	3,644.80	3,589.46	55.34	65.858		
7,600.00	7,589.10	15,660.00	11,101.11	27.37	88.30	164.84	-2.04	2.18	3,545.20	3,489.62	55.59	63.776		
7,700.00	7,689.10	15,660.00	11,101.11	27.72	88.30	164.84	-2.04	2.18	3,445.63	3,389.79	55.84	61.710		
7,800.00	7,789.10	15,660.00	11,101.11	28.07	88.30	164.84	-2.04	2.18	3,346.08	3,289.99	56.09	59.658		
7,900.00	7,889.10	15,660.00	11,101.11	28.43	88.30	164.84	-2.04	2.18	3,246.56	3,190.22	56.34	57.621		
8,000.00	7,989.10	15,660.00	11,101.11	28.78	88.30	164.84	-2.04	2.18	3,147.07	3,090.47	56.60	55.599		
8,100.00	8,089.10	15,660.00	11,101.11	29.13	88.30	164.84	-2.04	2.18	3,047.61	2,990.75	56.87	53.592		
8,200.00	8,189.10	15,660.00	11,101.11	29.48	88.30	164.84	-2.04	2.18	2,948.19	2,891.06	57.13	51.601		
8,300.00	8,289.10	15,660.00	11,101.11	29.84	88.30	164.84	-2.04	2.18	2,848.82	2,791.41	57.41	49.625		
8,400.00	8,389.10	15,660.00	11,101.11	30.19	88.30	164.84	-2.04	2.18	2,749.48	2,691.80	57.68	47.664		
8,500.00	8,489.10	15,660.00	11,101.11	30.54	88.30	164.84	-2.04	2.18	2,650.20	2,592.23	57.97	45.720		
8,600.00	8,589.10	15,660.00	11,101.11	30.90	88.30	164.84	-2.04	2.18	2,550.97	2,492.71	58.25	43.791		
8,700.00	8,689.10	15,660.00	11,101.11	31.25	88.30	164.84	-2.04	2.18	2,451.80	2,393.26	58.55	41.878		
8,800.00	8,789.10	15,660.00	11,101.11	31.60	88.30	164.84	-2.04	2.18	2,352.71	2,293.86	58.85	39.981		
8,900.00	8,889.10	15,660.00	11,101.11	31.96	88.30	164.84	-2.04	2.18	2,253.69	2,194.54	59.15	38.100		
9,000.00	8,989.10	15,660.00	11,101.11	32.31	88.30	164.84	-2.04	2.18	2,154.77	2,095.30	59.47	36.235		
9,100.00	9,089.10	15,660.00	11,101.11	32.66	88.30	164.84	-2.04	2.18	2,055.95	1,996.16	59.79	34.387		
9,200.00	9,189.10	15,660.00	11,101.11	33.02	88.30	164.84	-2.04	2.18	1,957.25	1,897.13	60.12	32.555		
9,300.00	9,289.10	15,660.00	11,101.11	33.37	88.30	164.84	-2.04	2.18	1,858.69	1,798.22	60.46	30.741		
9,400.00	9,389.10	15,660.00	11,101.11	33.73	88.30	164.84	-2.04	2.18	1,760.29	1,699.47	60.82	28.943		
9,500.00	9,489.10	15,660.00	11,101.11	34.08	88.30	164.84	-2.04	2.18	1,662.08	1,600.89	61.19	27.162		
9,600.00	9,589.10	15,660.00	11,101.11	34.43	88.30	164.84	-2.04	2.18	1,564.10	1,502.52	61.58	25.399		
9,700.00	9,689.10	15,660.00	11,101.11	34.79	88.30	164.84	-2.04	2.18	1,466.39	1,404.40	62.00	23.653		
9,800.00	9,789.10	15,660.00	11,101.11	35.14	88.30	164.84	-2.04	2.18	1,369.01	1,306.58	62.44	21.926		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #2H - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 100-MWD													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
9,900.00	9,889.10	15,660.00	11,101.11	35.50	88.30	164.84		-2.04	2.18	1,272.04	1,209.13	62.92	20.218	
10,000.00	9,989.10	15,660.00	11,101.11	35.85	88.30	164.84		-2.04	2.18	1,175.58	1,112.14	63.44	18.531	
10,100.00	10,089.10	15,660.00	11,101.11	36.21	88.30	164.84		-2.04	2.18	1,079.76	1,015.74	64.03	16.864	
10,200.00	10,189.10	15,660.00	11,101.11	36.56	88.30	164.84		-2.04	2.18	984.78	920.08	64.70	15.222	
10,300.00	10,289.10	15,660.00	11,101.11	36.92	88.30	164.84		-2.04	2.18	890.89	825.41	65.48	13.606	
10,400.00	10,389.10	15,660.00	11,101.11	37.27	88.30	164.84		-2.04	2.18	798.49	732.07	66.42	12.022	
10,500.00	10,489.10	15,660.00	11,101.11	37.63	88.30	164.84		-2.04	2.18	708.15	640.56	67.59	10.477	
10,600.00	10,589.10	15,660.00	11,101.11	37.98	88.30	164.84		-2.04	2.18	620.78	551.70	69.09	8.985	
10,700.00	10,689.10	15,660.00	11,101.11	38.34	88.30	164.84		-2.04	2.18	537.84	466.78	71.05	7.569	
10,800.00	10,789.10	15,660.00	11,101.11	38.69	88.30	164.84		-2.04	2.18	461.70	388.04	73.66	6.268	
10,900.00	10,889.10	15,660.00	11,101.11	39.05	88.30	164.84		-2.04	2.18	396.31	319.31	77.00	5.147	
11,000.00	10,989.10	15,660.00	11,101.11	39.40	88.30	164.84		-2.04	2.18	347.79	267.05	80.74	4.308	
11,100.00	11,089.10	15,660.00	11,101.11	39.76	88.30	164.84		-2.04	2.18	323.82	240.18	83.64	3.872	
11,130.52	11,119.61	15,660.00	11,101.11	39.87	88.30	164.84		-2.04	2.18	322.38	238.29	84.09	3.834 CC, ES, SF	
11,200.00	11,189.10	15,660.00	11,101.11	40.11	88.30	164.84		-2.04	2.18	329.78	245.65	84.13	3.920	
11,300.00	11,289.10	15,660.00	11,101.11	40.47	88.30	164.84		-2.04	2.18	364.21	281.96	82.25	4.428	
11,400.00	11,389.10	15,660.00	11,101.11	40.82	88.30	164.84		-2.04	2.18	420.18	340.65	79.52	5.284	
11,443.94	11,433.04	15,660.00	11,101.11	40.98	88.30	164.84		-2.04	2.18	449.63	371.25	78.38	5.737	
11,450.00	11,439.10	15,660.00	11,101.11	41.00	88.30	164.83		-2.04	2.18	453.85	375.62	78.23	5.802	
11,500.00	11,489.01	15,660.00	11,101.11	41.16	88.30	164.62		-2.04	2.18	488.68	411.63	77.04	6.343	
11,550.00	11,538.49	15,660.00	11,101.11	41.31	88.30	164.04		-2.04	2.18	523.29	447.32	75.97	6.888	
11,600.00	11,587.17	15,660.00	11,101.11	41.45	88.30	163.06		-2.04	2.18	557.49	482.48	75.01	7.432	
11,650.00	11,634.68	15,660.00	11,101.11	41.58	88.30	161.61		-2.04	2.18	591.11	516.95	74.16	7.971	
11,700.00	11,680.66	15,660.00	11,101.11	41.70	88.30	159.57		-2.04	2.18	624.01	550.60	73.41	8.501	
11,750.00	11,724.75	15,660.00	11,101.11	41.81	88.30	156.77		-2.04	2.18	656.06	583.29	72.77	9.016	
11,800.00	11,766.62	15,660.00	11,101.11	41.91	88.30	152.94		-2.04	2.18	687.16	614.92	72.24	9.513	
11,850.00	11,805.95	15,660.00	11,101.11	42.00	88.30	147.66		-2.04	2.18	717.21	645.39	71.82	9.986	
11,900.00	11,842.44	15,660.00	11,101.11	42.09	88.30	140.34		-2.04	2.18	746.11	674.59	71.52	10.432	
11,950.00	11,875.82	15,660.00	11,101.11	42.17	88.30	130.19		-2.04	2.18	773.80	702.46	71.34	10.847	
12,000.00	11,905.83	15,660.00	11,101.11	42.25	88.30	116.60		-2.04	2.18	800.20	728.91	71.28	11.226	
12,050.00	11,932.24	15,660.00	11,101.11	42.34	88.30	100.05		-2.04	2.18	825.23	753.88	71.35	11.567	
12,100.00	11,954.85	15,623.35	11,102.28	42.44	87.75	96.71		-38.61	4.25	848.05	776.65	71.40	11.877	
12,150.00	11,973.49	15,582.84	11,103.44	42.53	87.14	94.51		-79.04	6.39	867.20	795.74	71.47	12.135	
12,200.00	11,988.01	15,539.37	11,104.39	42.63	86.49	93.08		-122.46	8.41	882.68	811.14	71.54	12.338	
12,250.00	11,998.31	15,494.51	11,105.23	42.73	85.82	91.91		-167.26	10.55	894.29	822.64	71.65	12.482	
12,300.00	12,004.31	15,453.39	11,105.81	42.84	85.21	89.61		-208.33	12.51	902.07	830.26	71.81	12.562	
12,343.94	12,006.00	15,418.61	11,105.95	42.93	84.69	87.35		-243.08	14.03	905.91	833.91	71.99	12.583	
12,400.00	12,006.00	15,372.43	11,105.62	43.06	84.01	85.19		-289.22	15.86	909.27	837.04	72.23	12.589	
12,500.00	12,006.00	15,280.90	11,104.32	43.33	82.66	83.86		-380.65	19.86	915.75	843.22	72.53	12.625	
12,600.00	12,006.00	15,181.27	11,102.71	43.66	81.20	84.33		-480.16	24.36	921.89	849.20	72.69	12.683	
12,700.00	12,006.00	15,073.02	11,100.77	44.05	79.62	86.41		-588.33	28.22	927.23	854.61	72.63	12.767	
12,800.00	12,006.00	14,962.66	11,101.52	44.48	78.02	88.66		-698.62	31.89	929.12	856.67	72.45	12.824	
12,900.00	12,006.00	14,877.61	11,101.04	44.96	76.79	85.68		-783.59	35.51	931.53	859.21	72.32	12.881	
12,927.98	12,006.00	14,849.63	11,100.72	45.11	76.39	85.70		-811.55	36.62	932.16	859.93	72.22	12.906	
13,000.00	12,006.00	14,758.48	11,100.11	45.50	75.09	89.51		-902.64	39.63	933.27	861.42	71.85	12.989	
13,080.74	12,006.00	14,677.15	11,101.20	45.97	73.93	89.62		-983.93	41.93	932.79	861.20	71.59	13.030	
13,100.00	12,006.00	14,661.76	11,101.28	46.08	73.72	88.86		-999.31	42.38	932.83	861.28	71.55	13.038	
13,200.00	12,006.00	14,572.95	11,100.77	46.72	72.47	86.67		-1,088.08	44.99	934.06	862.75	71.31	13.099	
13,300.00	12,006.00	14,480.22	11,099.47	47.40	71.17	85.28		-1,180.78	47.38	935.99	864.95	71.05	13.174	
13,400.00	12,006.00	14,366.27	11,097.34	48.13	69.59	87.98		-1,294.69	49.55	938.24	867.61	70.62	13.285	
13,500.00	12,006.00	14,259.77	11,097.16	48.91	68.14	89.24		-1,401.18	50.04	938.29	868.04	70.25	13.356	
13,600.00	12,006.00	14,125.07	11,100.85	49.73	66.31	95.90		-1,535.80	51.59	935.57	865.76	69.82	13.401	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #2H - Wellbore #1 - Surveys													Offset Site Error: 0.00 usft
Survey Program: 100-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre N-S (usft)	E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
13,700.00	12,006.00	14,046.75	11,103.57	50.59	65.26	91.70	-1,614.00	54.70	933.31	863.46	69.85	13.361	
13,800.00	12,006.00	13,956.52	11,105.34	51.49	64.05	89.81	-1,704.12	58.79	932.71	862.84	69.87	13.349	
13,900.00	12,006.00	13,856.97	11,107.01	52.42	62.74	89.71	-1,803.53	63.74	932.53	862.65	69.88	13.344	
13,902.83	12,006.00	13,854.60	11,107.05	52.45	62.71	89.62	-1,805.90	63.87	932.53	862.64	69.89	13.344	
14,000.00	12,006.00	13,772.00	11,107.63	53.39	61.63	86.92	-1,888.38	68.20	933.35	863.35	70.00	13.334	
14,100.00	12,006.00	13,691.68	11,106.72	54.39	60.60	83.38	-1,968.57	72.61	936.03	865.87	70.16	13.341	
14,200.00	12,006.00	13,601.72	11,104.29	55.43	59.45	81.67	-2,058.35	77.91	940.33	870.04	70.29	13.378	
14,300.00	12,006.00	13,468.57	11,102.14	56.49	57.79	87.57	-2,191.30	84.56	943.34	873.20	70.14	13.450	
14,400.00	12,006.00	13,378.95	11,102.22	57.58	56.69	85.78	-2,280.77	89.78	945.06	874.70	70.35	13.433	
14,500.00	12,006.00	13,297.88	11,101.16	58.70	55.72	82.60	-2,361.65	95.16	948.39	877.73	70.66	13.422	
14,600.00	12,006.00	13,179.58	11,099.66	59.84	54.32	85.75	-2,479.68	103.00	951.69	880.91	70.78	13.446	
14,700.00	12,006.00	13,058.36	11,100.39	61.01	52.93	89.27	-2,600.62	111.13	953.39	882.41	70.98	13.432	
14,774.23	12,006.00	12,981.83	11,102.47	61.89	52.07	89.62	-2,676.98	115.77	952.97	881.76	71.21	13.382	
14,800.00	12,006.00	12,963.42	11,102.77	62.19	51.87	88.43	-2,695.35	116.83	953.07	881.74	71.33	13.362	
14,900.00	12,006.00	12,879.77	11,102.43	63.40	50.96	85.81	-2,778.88	121.32	955.13	883.44	71.69	13.323	
15,000.00	12,006.00	12,776.23	11,101.20	64.63	49.86	86.40	-2,882.34	125.03	957.32	885.43	71.89	13.317	
15,100.00	12,006.00	12,626.68	11,101.66	65.88	48.34	94.20	-3,031.83	128.56	958.09	886.25	71.84	13.337	
15,200.00	12,006.00	12,534.71	11,104.53	67.14	47.45	92.93	-3,123.74	129.82	955.47	883.32	72.15	13.243	
15,300.00	12,006.00	12,441.00	11,107.51	68.42	46.57	91.93	-3,217.39	131.89	953.15	880.62	72.52	13.142	
15,378.99	12,006.00	12,376.82	11,109.00	69.45	45.99	89.60	-3,281.52	133.81	952.24	879.33	72.91	13.061	
15,400.00	12,006.00	12,361.49	11,109.12	69.72	45.86	88.72	-3,296.84	134.32	952.31	879.29	73.01	13.043	
15,500.00	12,006.00	12,257.89	11,109.29	71.03	44.97	89.27	-3,400.39	137.44	953.07	879.68	73.38	12.987	
15,600.00	12,006.00	12,177.43	11,108.81	72.35	44.32	86.26	-3,480.83	139.17	954.23	880.36	73.86	12.919	
15,700.00	12,006.00	12,087.61	11,106.37	73.69	43.62	84.71	-3,570.60	140.91	957.20	882.92	74.28	12.886	
15,800.00	12,006.00	11,966.56	11,103.81	75.04	42.74	87.94	-3,691.59	143.66	959.84	885.27	74.57	12.872	
15,900.00	12,006.00	11,879.80	11,102.73	76.41	42.17	85.93	-3,778.32	145.74	961.67	886.55	75.11	12.803	
16,000.00	12,006.00	11,787.62	11,100.33	77.78	41.60	84.75	-3,870.45	147.67	964.62	888.99	75.63	12.755	
16,100.00	12,006.00	11,645.11	11,099.97	79.16	40.82	91.19	-4,012.91	149.71	964.90	888.96	75.95	12.705	
16,182.38	12,006.00	11,573.09	11,100.72	80.31	40.47	89.62	-4,084.92	150.98	964.47	887.98	76.49	12.609	
16,200.00	12,006.00	11,557.37	11,100.79	80.56	40.40	89.33	-4,100.64	151.28	964.49	887.88	76.61	12.589	
16,300.00	12,006.00	11,467.08	11,100.33	81.96	40.02	87.87	-4,190.91	152.54	965.23	887.97	77.26	12.493	
16,400.00	12,006.00	11,409.28	11,098.69	83.38	39.80	81.56	-4,248.69	153.17	968.27	890.20	78.07	12.403	
16,500.00	12,006.00	11,365.00	11,094.84	84.80	39.64	73.53	-4,292.79	153.54	976.52	897.58	78.94	12.370	
16,600.00	12,006.00	11,306.00	11,086.43	86.23	39.44	67.92	-4,351.17	153.84	989.70	910.03	79.66	12.424	
16,700.00	12,006.00	11,274.00	11,079.65	87.67	39.33	59.57	-4,382.44	154.19	1,008.66	928.04	80.62	12.512	
16,778.77	12,006.00	11,242.00	11,071.07	88.80	39.23	54.48	-4,413.26	154.80	1,027.98	946.71	81.28	12.648	
16,779.28	12,006.00	11,242.00	11,071.07	88.82	39.23	54.43	-4,413.26	154.80	1,028.12	947.61	80.51	12.771	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Stevens "11" - Stevens 11 1 - Wellbore #1 - Surveys											Offset Site Error: 0.00 usft		
Survey Program: 170-INC-ONLY											Offset Well Error: 0.00 usft		
Reference		Offset		Semi Major Axis		Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		Separation Factor
0.00	0.00	6.50	6.50	0.00	0.05	178.33	-2,939.41	85.51	2,940.65				
100.00	100.00	106.50	106.50	0.13	0.89	178.33	-2,939.41	85.51	2,940.65	2,939.64	1.02	2,891.695	
200.00	200.00	206.50	206.50	0.49	2.11	178.33	-2,939.41	85.51	2,940.65	2,938.05	2.60	1,131.036	
280.49	280.49	286.86	286.85	0.78	3.64	178.33	-2,939.03	85.51	2,940.27	2,935.86	4.42	665.600	
300.00	300.00	303.59	303.58	0.85	3.96	178.33	-2,939.04	85.51	2,940.28	2,935.48	4.81	611.818	
400.00	400.00	406.52	406.50	1.20	5.92	178.33	-2,939.41	85.51	2,940.65	2,933.53	7.12	412.843	
500.00	500.00	506.52	506.50	1.56	7.82	178.33	-2,939.41	85.51	2,940.65	2,931.27	9.39	313.323	
517.73	517.73	522.37	522.35	1.63	8.13	178.33	-2,939.18	85.51	2,940.43	2,930.68	9.75	301.560	
600.00	600.00	595.69	595.67	1.92	9.52	178.33	-2,939.34	85.51	2,940.61	2,929.17	11.44	257.010	
698.46	698.46	704.99	704.96	2.27	11.72	178.33	-2,939.10	85.51	2,940.35	2,926.35	14.00	210.089	
700.00	700.00	706.27	706.23	2.28	11.75	178.33	-2,939.10	85.51	2,940.35	2,926.32	14.03	209.617	
800.00	800.00	806.55	806.50	2.64	13.79	178.33	-2,939.41	85.51	2,940.65	2,924.23	16.43	179.032	
900.00	900.00	906.55	906.50	3.00	15.83	178.33	-2,939.41	85.51	2,940.65	2,921.83	18.82	156.222	
1,000.00	1,000.00	1,006.55	1,006.50	3.35	17.87	178.33	-2,939.41	85.51	2,940.65	2,919.43	21.22	138.567	
1,038.67	1,038.67	1,041.97	1,041.91	3.49	18.59	178.33	-2,938.48	85.51	2,939.73	2,917.64	22.08	133.122	
1,100.00	1,100.00	1,096.81	1,096.75	3.71	19.71	178.33	-2,938.60	85.51	2,939.86	2,916.44	23.42	125.520	
1,200.00	1,200.00	1,186.24	1,186.17	4.07	21.53	178.33	-2,939.06	85.51	2,940.37	2,914.77	25.60	114.841	
1,300.00	1,299.99	1,306.60	1,306.49	4.43	23.94	178.33	-2,939.41	85.51	2,941.50	2,913.14	28.36	103.703	
1,400.00	1,399.96	1,406.56	1,406.46	4.79	25.90	178.32	-2,939.41	85.51	2,944.05	2,913.36	30.69	95.922	
1,500.00	1,499.86	1,504.68	1,504.57	5.15	27.84	178.30	-2,938.60	85.51	2,947.49	2,914.50	32.98	89.363	
1,600.00	1,599.68	1,597.35	1,597.24	5.51	29.66	178.27	-2,938.76	85.51	2,953.61	2,918.44	35.17	83.987	
1,600.23	1,599.90	1,597.57	1,597.45	5.51	29.67	178.27	-2,938.76	85.51	2,953.63	2,918.45	35.17	83.975	
1,700.00	1,699.43	1,689.94	1,689.83	5.87	31.49	178.24	-2,939.16	85.51	2,960.83	2,923.48	37.35	79.274	
1,800.00	1,799.19	1,805.83	1,805.69	6.23	33.72	178.21	-2,939.41	85.51	2,967.84	2,927.90	39.94	74.309	
1,900.00	1,898.94	1,905.59	1,905.44	6.59	35.61	178.18	-2,939.41	85.51	2,974.63	2,932.44	42.19	70.501	
2,000.00	1,998.70	2,003.34	2,003.19	6.95	37.47	178.15	-2,938.61	85.51	2,980.64	2,936.23	44.41	67.118	
2,100.00	2,098.46	2,095.76	2,095.60	7.32	39.22	178.12	-2,938.79	85.51	2,987.63	2,941.11	46.52	64.218	
2,200.00	2,198.21	2,188.15	2,187.99	7.69	40.98	178.09	-2,939.19	85.51	2,994.87	2,946.23	48.64	61.576	
2,300.00	2,297.97	2,304.64	2,304.47	8.05	43.19	178.06	-2,939.41	85.51	3,001.84	2,950.63	51.21	58.615	
2,400.00	2,397.72	2,404.40	2,404.22	8.42	45.09	178.03	-2,939.41	85.51	3,008.64	2,955.17	53.47	56.269	
2,500.00	2,497.48	2,502.59	2,502.42	8.79	46.96	178.00	-2,938.87	85.51	3,014.91	2,959.21	55.70	54.131	
2,600.00	2,597.24	2,597.34	2,597.16	9.16	48.76	177.97	-2,939.00	85.51	3,021.85	2,963.99	57.86	52.229	
2,700.00	2,696.99	2,692.06	2,691.88	9.52	50.56	177.94	-2,939.29	85.51	3,028.95	2,968.94	60.02	50.468	
2,800.00	2,796.75	2,803.46	2,803.25	9.89	52.85	177.91	-2,939.41	85.51	3,035.86	2,973.19	62.67	48.445	
2,900.00	2,896.50	2,903.21	2,903.00	10.26	54.95	177.88	-2,939.41	85.51	3,042.67	2,977.54	65.13	46.716	
3,000.00	2,996.26	3,000.56	3,000.34	10.63	57.00	177.85	-2,938.61	85.51	3,048.67	2,981.13	67.54	45.136	
3,100.00	3,096.02	3,092.89	3,092.67	11.00	58.95	177.82	-2,938.79	85.51	3,055.68	2,985.83	69.85	43.746	
3,200.00	3,195.77	3,185.20	3,184.98	11.37	60.90	177.80	-2,939.20	85.51	3,062.93	2,990.78	72.16	42.448	
3,300.00	3,295.53	3,300.56	3,300.27	11.74	63.33	177.77	-2,938.99	85.51	3,069.48	2,994.52	74.96	40.950	
3,400.00	3,395.29	3,402.09	3,401.79	12.11	65.44	177.74	-2,939.41	85.51	3,076.71	2,999.29	77.42	39.739	
3,500.00	3,495.04	3,501.85	3,501.54	12.48	67.40	177.71	-2,939.41	85.51	3,083.52	3,003.77	79.75	38.665	
3,600.00	3,594.80	3,597.76	3,597.45	12.85	69.29	177.68	-2,938.82	85.51	3,089.75	3,007.75	82.00	37.680	
3,700.00	3,694.55	3,687.82	3,687.51	13.22	71.07	177.65	-2,939.07	85.51	3,096.84	3,012.71	84.13	36.809	
3,800.00	3,794.31	3,801.15	3,800.81	13.59	73.30	177.63	-2,939.41	85.51	3,103.96	3,017.23	86.73	35.790	
3,900.00	3,894.07	3,894.11	3,893.76	13.96	75.13	177.60	-2,939.09	85.51	3,110.47	3,021.55	88.92	34.981	
4,000.00	3,993.82	4,000.68	4,000.32	14.34	77.26	177.57	-2,939.41	85.51	3,117.59	3,026.19	91.41	34.107	
4,100.00	4,093.58	4,100.44	4,100.08	14.71	79.29	177.54	-2,939.41	85.51	3,124.41	3,030.60	93.80	33.308	
4,200.00	4,193.33	4,191.29	4,190.93	15.08	81.15	177.52	-2,938.99	85.51	3,130.82	3,034.80	96.02	32.606	
4,300.00	4,293.09	4,299.99	4,299.59	15.45	83.44	177.49	-2,939.41	85.51	3,138.04	3,039.36	98.68	31.801	
4,400.00	4,392.85	4,399.74	4,399.35	15.82	85.86	177.46	-2,939.41	85.51	3,144.86	3,043.40	101.46	30.997	
4,500.00	4,492.60	4,499.50	4,499.10	16.19	88.28	177.43	-2,939.41	85.51	3,151.68	3,047.44	104.24	30.236	
4,600.00	4,592.36	4,599.25	4,598.86	16.56	90.70	177.41	-2,939.41	85.51	3,158.50	3,051.48	107.02	29.514	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Stevens "11" - Stevens 11 1 - Wellbore #1 - Surveys														Offset Site Error:	0.00 usft
Survey Program: 170-JNC-ONLY														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
4,700.00	4,692.12	4,693.22	4,692.81	16.94	92.98	177.38	-2,937.99	85.51	3,163.90	3,054.25	109.66	28.853			
4,800.00	4,791.87	4,785.51	4,785.09	17.31	95.21	177.35	-2,938.26	85.51	3,171.02	3,058.77	112.25	28.249			
4,900.00	4,891.63	4,877.77	4,877.35	17.68	97.45	177.33	-2,938.76	85.51	3,178.38	3,063.53	114.85	27.675			
5,000.00	4,991.38	4,998.52	4,997.88	18.05	100.33	177.30	-2,939.41	85.51	3,185.78	3,067.69	118.09	26.977			
5,100.00	5,091.14	5,098.28	5,097.64	18.42	102.61	177.27	-2,939.41	85.51	3,192.61	3,071.87	120.73	26.443			
5,200.00	5,190.90	5,172.04	5,171.37	18.79	104.29	177.25	-2,938.44	85.51	3,198.56	3,075.79	122.77	26.053			
5,300.00	5,290.65	5,297.87	5,297.15	19.17	106.97	177.22	-2,939.41	85.51	3,206.25	3,080.43	125.82	25.483			
5,400.00	5,390.41	5,397.62	5,396.91	19.54	108.85	177.20	-2,939.41	85.51	3,213.08	3,085.02	128.06	25.090			
5,500.00	5,490.16	5,492.31	5,491.60	19.91	110.63	177.17	-2,939.07	85.51	3,219.57	3,089.36	130.20	24.727			
5,600.00	5,589.92	5,584.82	5,584.10	20.28	112.38	177.14	-2,939.32	85.51	3,226.66	3,094.36	132.31	24.388			
5,700.00	5,689.68	5,696.91	5,696.18	20.65	114.56	177.12	-2,939.41	85.51	3,233.56	3,098.70	134.86	23.977			
5,800.00	5,789.43	5,796.67	5,795.93	21.03	116.52	177.09	-2,939.41	85.51	3,240.38	3,103.20	137.18	23.621			
5,849.08	5,838.40	5,841.93	5,841.19	21.21	117.41	177.08	-2,938.77	85.51	3,243.10	3,104.86	138.25	23.459			
5,900.00	5,889.21	5,887.87	5,887.13	21.40	118.32	177.07	-2,938.86	85.51	3,246.35	3,107.01	139.33	23.299			
6,000.00	5,989.11	5,978.18	5,977.44	21.76	120.09	177.05	-2,939.23	85.51	3,251.00	3,109.54	141.46	22.981			
6,100.00	6,089.10	6,096.37	6,095.60	22.11	122.35	177.05	-2,939.41	85.51	3,252.82	3,108.74	144.08	22.576			
6,115.90	6,105.00	6,112.27	6,111.50	22.17	122.65	177.05	-2,939.41	85.51	3,252.85	3,108.41	144.44	22.521			
6,200.00	6,189.10	6,196.37	6,195.60	22.46	124.24	177.05	-2,939.41	85.51	3,252.85	3,106.52	146.33	22.230			
6,300.00	6,289.10	6,296.37	6,295.60	22.81	126.13	177.05	-2,939.41	85.51	3,252.85	3,104.28	148.57	21.894			
6,400.00	6,389.10	6,396.37	6,395.60	23.16	128.02	177.05	-2,939.41	85.51	3,252.85	3,102.03	150.82	21.568			
6,500.00	6,489.10	6,496.37	6,495.60	23.51	129.91	177.05	-2,939.41	85.51	3,252.85	3,099.79	153.06	21.252			
6,584.27	6,573.36	6,580.55	6,579.77	23.81	131.50	177.04	-2,937.54	85.51	3,250.98	3,096.03	154.95	20.981			
6,600.00	6,589.10	6,595.73	6,594.94	23.86	131.78	177.04	-2,937.54	85.51	3,250.98	3,095.69	155.29	20.934			
6,700.00	6,689.10	6,692.15	6,691.36	24.21	133.61	177.04	-2,937.61	85.51	3,251.06	3,093.59	157.47	20.645			
6,800.00	6,789.10	6,788.57	6,787.79	24.56	135.43	177.04	-2,937.79	85.51	3,251.24	3,091.60	159.65	20.365			
6,900.00	6,889.10	6,885.00	6,884.21	24.91	137.25	177.04	-2,938.08	85.51	3,251.54	3,089.71	161.82	20.093			
7,000.00	6,989.10	6,981.43	6,980.63	25.26	139.07	177.04	-2,938.47	85.51	3,251.94	3,087.94	164.00	19.829			
7,100.00	7,089.10	7,077.86	7,077.06	25.61	140.89	177.05	-2,938.97	85.51	3,252.46	3,086.28	166.18	19.572			
7,200.00	7,189.10	7,196.44	7,195.60	25.96	143.14	177.05	-2,939.41	85.51	3,252.85	3,084.07	168.78	19.272			
7,300.00	7,289.10	7,296.44	7,295.60	26.31	145.03	177.05	-2,939.41	85.51	3,252.85	3,081.82	171.03	19.019			
7,374.05	7,363.15	7,370.49	7,369.65	26.57	146.43	177.05	-2,938.93	85.51	3,252.37	3,079.67	172.70	18.833			
7,400.00	7,389.10	7,394.87	7,394.03	26.67	146.89	177.05	-2,938.93	85.51	3,252.37	3,079.13	173.25	18.773			
7,500.00	7,489.10	7,488.83	7,487.99	27.02	148.67	177.05	-2,939.07	85.51	3,252.52	3,077.13	175.38	18.545			
7,600.00	7,589.10	7,596.46	7,595.60	27.37	150.73	177.05	-2,939.41	85.51	3,252.85	3,075.05	177.80	18.295			
7,700.00	7,689.10	7,696.46	7,695.60	27.72	153.00	177.05	-2,939.41	85.51	3,252.85	3,072.42	180.43	18.028			
7,800.00	7,789.10	7,796.46	7,795.60	28.07	155.28	177.05	-2,939.41	85.51	3,252.85	3,069.79	183.06	17.769			
7,886.47	7,875.56	7,882.93	7,882.05	28.38	157.24	177.04	-2,938.45	85.51	3,251.89	3,066.56	185.33	17.546			
7,900.00	7,889.10	7,895.54	7,894.67	28.43	157.53	177.04	-2,938.46	85.51	3,251.90	3,066.23	185.67	17.514			
8,000.00	7,989.10	7,988.77	7,987.89	28.78	159.65	177.04	-2,938.58	85.51	3,252.03	3,063.89	188.14	17.285			
8,100.00	8,089.10	8,081.99	8,081.11	29.13	161.77	177.05	-2,938.90	85.51	3,252.37	3,061.75	190.62	17.062			
8,200.00	8,189.10	8,196.61	8,195.60	29.48	164.41	177.05	-2,939.41	85.51	3,252.85	3,059.23	193.62	16.800			
8,264.22	8,253.31	8,259.18	8,258.16	29.71	165.93	177.05	-2,938.79	85.51	3,252.23	3,056.85	195.37	16.646			
8,300.00	8,289.10	8,281.43	8,280.41	29.84	166.48	177.05	-2,938.84	85.51	3,252.32	3,056.28	196.04	16.590			
8,400.00	8,389.10	8,396.66	8,395.60	30.19	169.24	177.05	-2,939.41	85.51	3,252.85	3,053.69	199.16	16.333			
8,455.66	8,444.76	8,451.27	8,450.19	30.39	170.53	177.05	-2,938.81	85.51	3,252.25	3,051.60	200.65	16.209			
8,500.00	8,489.10	8,484.81	8,483.73	30.54	171.32	177.05	-2,938.88	85.51	3,252.34	3,050.74	201.60	16.133			
8,600.00	8,589.10	8,596.73	8,595.60	30.90	173.99	177.05	-2,939.41	85.51	3,252.85	3,048.22	204.63	15.896			
8,700.00	8,689.10	8,696.73	8,695.60	31.25	176.44	177.05	-2,939.41	85.51	3,252.85	3,045.41	207.44	15.681			
8,737.64	8,726.74	8,732.03	8,730.88	31.38	177.30	177.04	-2,938.33	85.51	3,251.77	3,043.34	208.43	15.601			
8,800.00	8,789.10	8,781.63	8,780.48	31.60	178.52	177.04	-2,938.47	85.51	3,251.94	3,042.08	209.86	15.496			
8,900.00	8,889.10	8,896.84	8,895.60	31.96	181.33	177.05	-2,939.41	85.51	3,252.85	3,039.81	213.04	15.269			
8,959.87	8,948.96	8,955.84	8,954.59	32.17	182.73	177.05	-2,938.97	85.51	3,252.41	3,037.77	214.65	15.152			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Stevens "11" - Stevens 11 1 - Wellbore #1 - Surveys												Offset Site Error:	0.00 usft
Survey Program: 170-INC-ONLY												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,000.00	8,989.10	8,980.33	8,979.07	32.31	183.31	177.05	-2,939.04	85.51	3,252.52	3,037.16	215.36	15.102	
9,100.00	9,089.10	9,096.88	9,095.60	32.66	186.01	177.05	-2,939.41	85.51	3,252.85	3,034.42	218.43	14.892	
9,200.00	9,189.10	9,196.92	9,195.60	33.02	188.28	177.05	-2,939.41	85.51	3,252.85	3,031.79	221.06	14.715	
9,300.00	9,289.10	9,296.92	9,295.60	33.37	190.49	177.05	-2,939.41	85.51	3,252.85	3,029.22	223.63	14.546	
9,400.00	9,389.10	9,396.92	9,395.60	33.73	192.70	177.05	-2,939.41	85.51	3,252.85	3,026.66	226.19	14.381	
9,440.66	9,429.75	9,435.14	9,433.80	33.87	193.54	177.04	-2,938.09	85.51	3,251.54	3,024.36	227.18	14.313	
9,500.00	9,489.10	9,486.93	9,485.59	34.08	194.69	177.04	-2,938.19	85.51	3,251.65	3,023.12	228.53	14.228	
9,600.00	9,589.10	9,574.21	9,572.86	34.43	196.61	177.04	-2,938.63	85.51	3,252.15	3,021.34	230.81	14.090	
9,700.00	9,689.10	9,697.01	9,695.60	34.79	199.39	177.05	-2,939.41	85.51	3,252.85	3,018.90	233.95	13.904	
9,800.00	9,789.10	9,797.01	9,795.60	35.14	201.76	177.05	-2,939.41	85.51	3,252.85	3,016.16	236.69	13.743	
9,888.92	9,878.02	9,885.93	9,884.51	35.46	203.88	177.04	-2,938.43	85.51	3,251.87	3,012.75	239.12	13.600	
9,900.00	9,889.10	9,895.77	9,894.35	35.50	204.11	177.04	-2,938.43	85.51	3,251.87	3,012.48	239.39	13.584	
10,000.00	9,989.10	9,984.60	9,983.17	35.85	206.22	177.04	-2,938.62	85.51	3,252.08	3,010.23	241.85	13.447	
10,100.00	10,089.10	10,073.43	10,072.00	36.21	208.33	177.05	-2,939.11	85.51	3,252.64	3,008.32	244.31	13.313	
10,191.82	10,180.92	10,188.77	10,187.21	36.53	211.34	177.05	-2,938.82	85.51	3,252.26	3,004.60	247.66	13.132	
10,200.00	10,189.10	10,193.75	10,192.20	36.56	211.47	177.05	-2,938.82	85.51	3,252.26	3,004.44	247.82	13.123	
10,300.00	10,289.10	10,297.23	10,295.60	36.92	214.26	177.05	-2,939.41	85.51	3,252.85	3,001.88	250.97	12.961	
10,352.16	10,341.26	10,348.39	10,346.75	37.10	215.61	177.05	-2,938.70	85.51	3,252.14	2,999.64	252.50	12.880	
10,400.00	10,389.10	10,376.54	10,374.90	37.27	216.35	177.05	-2,938.80	85.51	3,252.30	2,998.90	253.41	12.834	
10,500.00	10,489.10	10,497.30	10,495.60	37.63	219.48	177.05	-2,939.41	85.51	3,252.85	2,995.95	256.90	12.662	
10,526.19	10,515.28	10,522.38	10,520.66	37.72	220.12	177.05	-2,938.81	85.51	3,252.25	2,994.61	257.64	12.623	
10,600.00	10,589.10	10,572.87	10,571.15	37.98	221.41	177.05	-2,939.01	85.51	3,252.54	2,993.36	259.18	12.549	
10,700.00	10,689.10	10,697.38	10,695.60	38.34	224.74	177.05	-2,939.41	85.51	3,252.85	2,989.96	262.88	12.374	
10,724.45	10,713.55	10,717.10	10,715.31	38.42	225.28	177.05	-2,938.68	85.51	3,252.13	2,988.62	263.51	12.342	
10,800.00	10,789.10	10,766.93	10,765.13	38.69	226.65	177.05	-2,938.95	85.51	3,252.54	2,987.41	265.12	12.268	
10,883.97	10,873.07	10,881.45	10,879.56	38.99	229.85	177.05	-2,938.73	85.51	3,252.17	2,983.53	268.65	12.106	
10,900.00	10,889.10	10,890.71	10,888.81	39.05	230.11	177.05	-2,938.74	85.51	3,252.19	2,983.23	268.96	12.092	
11,000.00	10,989.10	10,997.57	10,995.60	39.40	233.17	177.05	-2,939.41	85.51	3,252.85	2,980.47	272.38	11.942	
11,100.00	11,089.10	11,097.57	11,095.60	39.76	236.10	177.05	-2,939.41	85.51	3,252.85	2,977.18	275.67	11.800	
11,136.85	11,125.95	11,129.80	11,127.80	39.89	237.04	177.04	-2,938.04	85.51	3,251.49	2,974.75	276.74	11.749	
11,200.00	11,189.10	11,176.30	11,174.29	40.11	238.40	177.04	-2,938.23	85.51	3,251.74	2,973.42	278.32	11.684	
11,300.00	11,289.10	11,297.79	11,295.60	40.47	241.92	177.05	-2,939.41	85.51	3,252.85	2,970.65	282.20	11.527	
11,339.88	11,328.98	11,337.57	11,335.36	40.61	243.01	177.05	-2,938.80	85.51	3,252.24	2,968.80	283.44	11.474	
11,400.00	11,389.10	11,367.34	11,365.13	40.82	243.83	177.05	-2,938.94	85.51	3,252.52	2,968.06	284.46	11.434	
11,443.94	11,433.04	11,441.80	11,439.54	40.98	245.85	177.05	-2,939.41	85.51	3,252.85	2,966.20	286.65	11.348	
11,450.00	11,439.10	11,447.86	11,445.60	41.00	246.01	177.05	-2,939.41	85.51	3,252.82	2,965.99	286.83	11.340	
11,500.00	11,489.01	11,497.77	11,495.51	41.16	247.35	177.03	-2,939.41	85.51	3,250.19	2,961.87	288.32	11.273	
11,550.00	11,538.49	11,547.25	11,544.99	41.31	248.67	177.00	-2,939.41	85.51	3,243.36	2,953.56	289.80	11.192	
11,600.00	11,587.17	11,595.94	11,593.67	41.45	249.97	176.95	-2,939.41	85.51	3,232.38	2,941.13	291.26	11.098	
11,650.00	11,634.68	11,636.50	11,634.21	41.58	251.05	176.88	-2,938.12	85.51	3,216.05	2,923.57	292.48	10.996	
11,700.00	11,680.66	11,674.67	11,672.38	41.70	252.07	176.80	-2,938.25	85.51	3,197.22	2,903.58	293.63	10.889	
11,750.00	11,724.75	11,711.38	11,709.09	41.81	253.05	176.69	-2,938.46	85.51	3,174.68	2,879.95	294.73	10.771	
11,800.00	11,766.62	11,746.37	11,744.07	41.91	253.99	176.57	-2,938.74	85.51	3,148.61	2,852.83	295.78	10.645	
11,850.00	11,805.95	11,814.90	11,812.45	42.00	255.85	176.42	-2,939.41	85.51	3,119.32	2,821.56	297.76	10.476	
11,900.00	11,842.44	11,851.40	11,848.94	42.09	256.96	176.26	-2,939.41	85.51	3,086.32	2,787.35	298.97	10.323	
11,950.00	11,875.82	11,884.77	11,882.32	42.17	257.98	176.08	-2,939.41	85.51	3,050.40	2,750.34	300.06	10.166	
12,000.00	11,905.83	11,909.47	11,907.00	42.25	258.73	175.88	-2,938.60	85.51	3,011.04	2,710.16	300.88	10.007	
12,050.00	11,932.24	11,926.56	11,924.09	42.34	259.25	175.66	-2,938.65	85.51	2,970.24	2,668.79	301.46	9.853	
12,100.00	11,954.85	11,941.37	11,938.89	42.44	259.71	175.42	-2,938.75	85.51	2,927.49	2,625.53	301.95	9.695	
12,150.00	11,973.49	11,953.76	11,951.28	42.53	260.08	175.17	-2,938.86	85.51	2,883.07	2,580.70	302.37	9.535	
12,200.00	11,988.01	11,997.11	11,994.51	42.63	261.40	174.90	-2,939.41	85.51	2,837.56	2,533.82	303.74	9.342	
12,250.00	11,998.31	12,007.41	12,004.81	42.73	261.69	174.62	-2,939.41	85.51	2,790.67	2,486.61	304.06	9.178	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Stevens "11" - Stevens 11 1 - Wellbore #1 - Surveys														Offset Site Error:	0.00 usft
Survey Program: 170-INC-ONLY														Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Distance		Minimum		Separation		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre N-S (usft)	Offset Wellbore Centre E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor			
12,300.00	12,004.31	12,013.41	12,010.81	42.84	261.86	174.32	-2,939.41	85.51	2,743.18	2,438.91	304.26	9.016			
12,343.94	12,006.00	12,015.10	12,012.50	42.93	261.91	174.05	-2,939.41	85.51	2,701.22	2,396.89	304.33	8.876			
12,400.00	12,006.00	12,015.10	12,012.50	43.06	261.91	173.70	-2,939.41	85.51	2,647.57	2,343.21	304.36	8.699			
12,500.00	12,006.00	12,015.10	12,012.50	43.33	261.91	173.10	-2,939.41	85.51	2,551.34	2,246.92	304.42	8.381			
12,600.00	12,006.00	12,015.10	12,012.50	43.66	261.91	172.54	-2,939.41	85.51	2,454.47	2,149.99	304.48	8.061			
12,700.00	12,006.00	12,015.10	12,012.50	44.05	261.91	172.00	-2,939.41	85.51	2,357.00	2,052.46	304.54	7.740			
12,800.00	12,006.00	12,015.10	12,012.50	44.48	261.91	171.51	-2,939.41	85.51	2,258.98	1,954.38	304.61	7.416			
12,900.00	12,006.00	12,015.10	12,012.50	44.96	261.91	171.07	-2,939.41	85.51	2,160.47	1,855.81	304.67	7.091			
12,927.98	12,006.00	12,015.10	12,012.50	45.11	261.91	170.95	-2,939.41	85.51	2,132.83	1,828.15	304.69	7.000			
13,000.00	12,006.00	12,015.10	12,012.50	45.50	261.91	170.65	-2,939.41	85.51	2,061.66	1,756.93	304.73	6.766			
13,100.00	12,006.00	12,015.10	12,012.50	46.08	261.91	170.20	-2,939.41	85.51	1,962.95	1,658.14	304.80	6.440			
13,200.00	12,006.00	12,015.10	12,012.50	46.72	261.91	169.69	-2,939.41	85.51	1,864.37	1,559.48	304.89	6.115			
13,300.00	12,006.00	12,015.10	12,012.50	47.40	261.91	169.13	-2,939.41	85.51	1,765.95	1,460.97	304.98	5.790			
13,400.00	12,006.00	12,015.10	12,012.50	48.13	261.91	168.51	-2,939.41	85.51	1,667.72	1,362.62	305.09	5.466			
13,500.00	12,006.00	12,015.10	12,012.50	48.91	261.91	167.80	-2,939.41	85.51	1,569.71	1,264.48	305.23	5.143			
13,600.00	12,006.00	12,015.10	12,012.50	49.73	261.91	167.01	-2,939.41	85.51	1,471.97	1,166.59	305.38	4.820			
13,700.00	12,006.00	12,015.10	12,012.50	50.59	261.91	166.10	-2,939.41	85.51	1,374.56	1,068.98	305.57	4.498			
13,800.00	12,006.00	12,015.10	12,012.50	51.49	261.91	165.05	-2,939.41	85.51	1,277.54	971.74	305.80	4.178			
13,900.00	12,006.00	12,015.10	12,012.50	52.42	261.91	163.83	-2,939.41	85.51	1,181.03	874.94	306.09	3.858			
14,000.00	12,006.00	12,015.10	12,012.50	53.39	261.91	162.39	-2,939.41	85.51	1,085.14	778.69	306.45	3.541			
14,100.00	12,006.00	12,015.10	12,012.50	54.39	261.91	160.68	-2,939.41	85.51	990.07	683.17	306.91	3.226			
14,200.00	12,006.00	12,015.10	12,012.50	55.43	261.91	158.60	-2,939.41	85.51	896.08	588.57	307.50	2.914			
14,300.00	12,006.00	12,015.10	12,012.50	56.49	261.91	156.04	-2,939.41	85.51	803.53	495.24	308.29	2.606			
14,400.00	12,006.00	12,015.10	12,012.50	57.58	261.91	152.83	-2,939.41	85.51	713.00	403.63	309.37	2.305			
14,500.00	12,006.00	12,015.10	12,012.50	58.70	261.91	148.69	-2,939.41	85.51	625.36	314.51	310.85	2.012			
14,600.00	12,006.00	12,015.10	12,012.50	59.84	261.91	143.25	-2,939.41	85.51	542.02	229.11	312.91	1.732			
14,700.00	12,006.00	12,015.10	12,012.50	61.01	261.91	135.93	-2,939.41	85.51	465.29	149.53	315.76	1.474 Level 3			
14,800.00	12,006.00	12,015.10	12,012.50	62.19	261.91	125.96	-2,939.41	85.51	399.00	79.52	319.48	1.249 Level 2			
14,900.00	12,006.00	12,015.10	12,012.50	63.40	261.91	112.62	-2,939.41	85.51	349.16	25.56	323.60	1.079 Level 2			
15,000.00	12,006.00	12,015.10	12,012.50	64.63	261.91	96.09	-2,939.41	85.51	323.45	-3.07	326.52	0.991 Level 1			
15,036.46	12,006.00	12,015.10	12,012.50	65.08	261.91	89.62	-2,939.41	85.51	321.39	-5.49	326.88	0.983 Level 1, CC, ES, SF			
15,100.00	12,006.00	12,015.10	12,012.50	65.88	261.91	78.44	-2,939.41	85.51	327.61	1.22	326.39	1.004 Level 2			
15,200.00	12,006.00	12,015.10	12,012.50	67.14	261.91	62.65	-2,939.41	85.51	360.61	37.15	323.46	1.115 Level 2			
15,300.00	12,006.00	12,015.10	12,012.50	68.42	261.91	50.27	-2,939.41	85.51	415.63	95.97	319.65	1.300 Level 3			
15,400.00	12,006.00	12,015.10	12,012.50	69.72	261.91	41.10	-2,939.41	85.51	485.24	168.93	316.30	1.534			
15,500.00	12,006.00	12,015.10	12,012.50	71.03	261.91	34.35	-2,939.41	85.51	564.06	250.32	313.74	1.798			
15,600.00	12,006.00	12,015.10	12,012.50	72.35	261.91	29.32	-2,939.41	85.51	648.75	336.87	311.87	2.080			
15,700.00	12,006.00	12,015.10	12,012.50	73.69	261.91	25.46	-2,939.41	85.51	737.28	426.76	310.52	2.374			
15,800.00	12,006.00	12,015.10	12,012.50	75.04	261.91	22.45	-2,939.41	85.51	828.43	518.90	309.53	2.676			
15,900.00	12,006.00	12,015.10	12,012.50	76.41	261.91	20.03	-2,939.41	85.51	921.41	612.61	308.80	2.984			
16,000.00	12,006.00	12,015.10	12,012.50	77.78	261.91	18.07	-2,939.41	85.51	1,015.73	707.48	308.25	3.295			
16,100.00	12,006.00	12,015.10	12,012.50	79.16	261.91	16.43	-2,939.41	85.51	1,111.04	803.21	307.84	3.609			
16,200.00	12,006.00	12,015.10	12,012.50	80.56	261.91	15.06	-2,939.41	85.51	1,207.11	899.59	307.52	3.925			
16,300.00	12,006.00	12,015.10	12,012.50	81.96	261.91	13.89	-2,939.41	85.51	1,303.78	996.50	307.27	4.243			
16,400.00	12,006.00	12,015.10	12,012.50	83.38	261.91	12.88	-2,939.41	85.51	1,400.91	1,093.82	307.08	4.562			
16,500.00	12,006.00	12,015.10	12,012.50	84.80	261.91	12.00	-2,939.41	85.51	1,498.42	1,191.48	306.94	4.882			
16,600.00	12,006.00	12,015.10	12,012.50	86.23	261.91	11.23	-2,939.41	85.51	1,596.23	1,289.41	306.82	5.202			
16,700.00	12,006.00	12,015.10	12,012.50	87.67	261.91	10.55	-2,939.41	85.51	1,694.30	1,387.57	306.73	5.524			
16,778.77	12,006.00	12,015.10	12,012.50	88.80	261.91	10.07	-2,939.41	85.51	1,771.71	1,465.03	306.68	5.777			
16,779.28	12,006.00	12,015.10	12,012.50	88.82	261.91	10.07	-2,939.41	85.51	1,772.21	1,460.35	311.86	5.683			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to WELL @ 3640.50usft (Patterson 282) Coordinates are relative to: Charles Ling Fed Com #132H
Offset Depths are relative to Offset Datum
Central Meridian is 104° 20' 0.000 W
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.42°

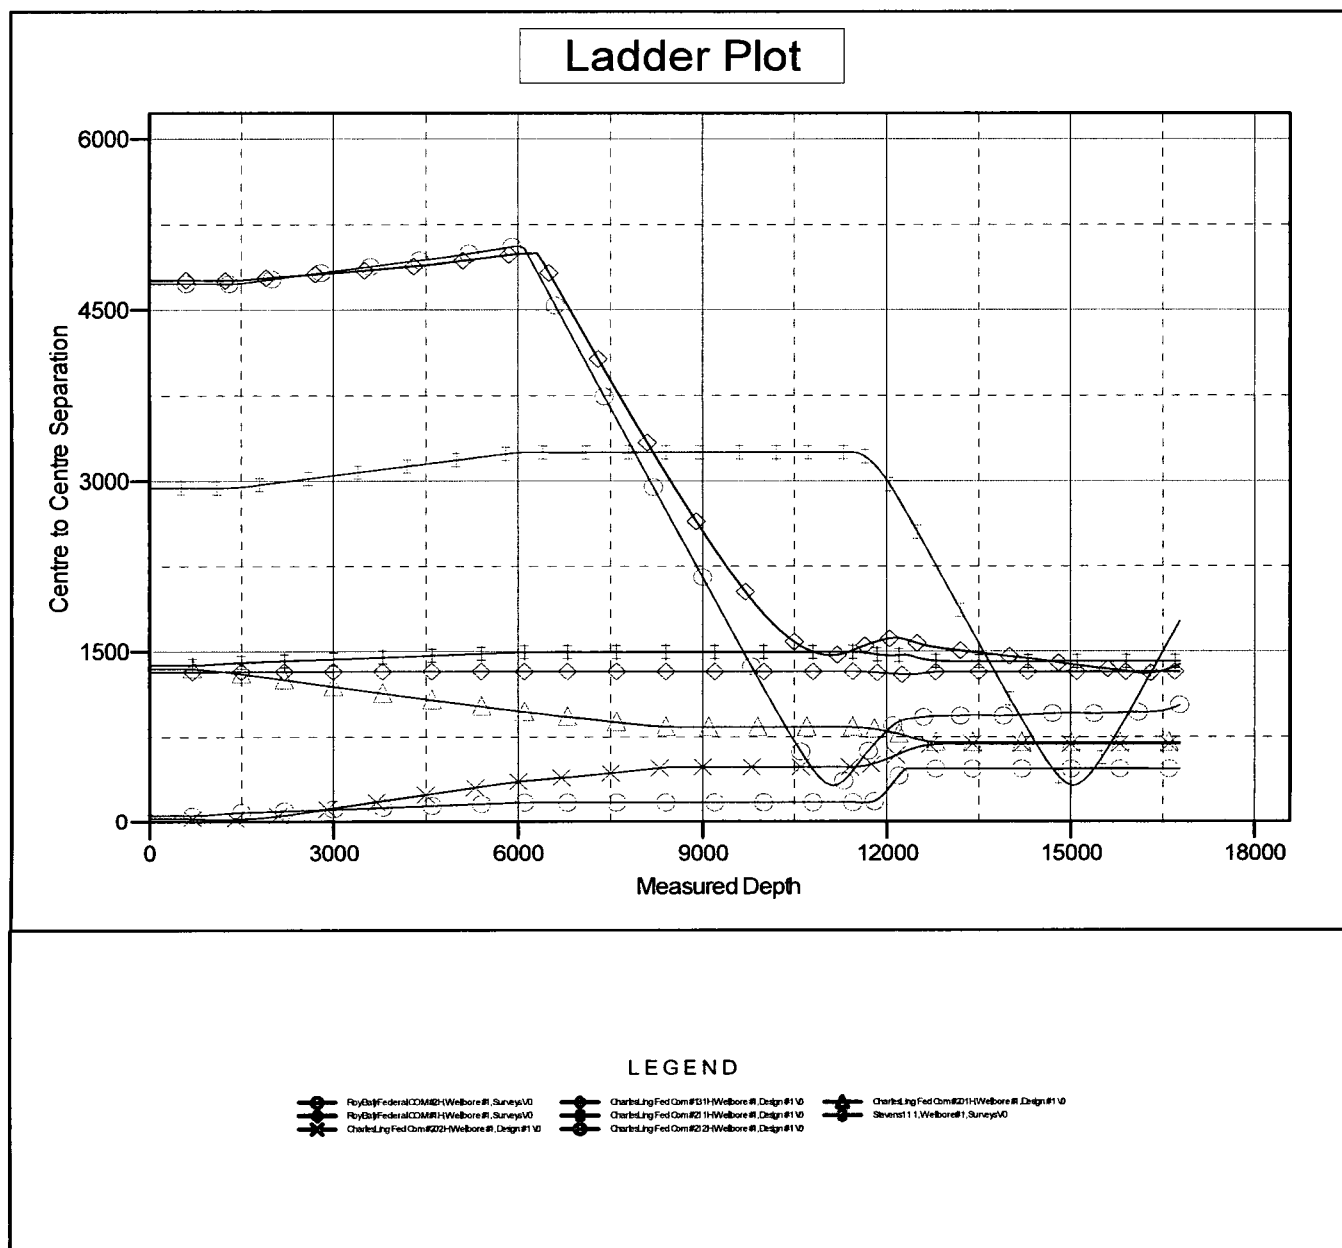

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #132H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3640.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3640.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #132H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to WELL @ 3640.50usft (Patterson 282) Coordinates are relative to: Charles Ling Fed Com #132H
Offset Depths are relative to Offset Datum Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Central Meridian is 104° 20' 0.000 W Grid Convergence at Surface is: 0.42°

Separation Factor Plot

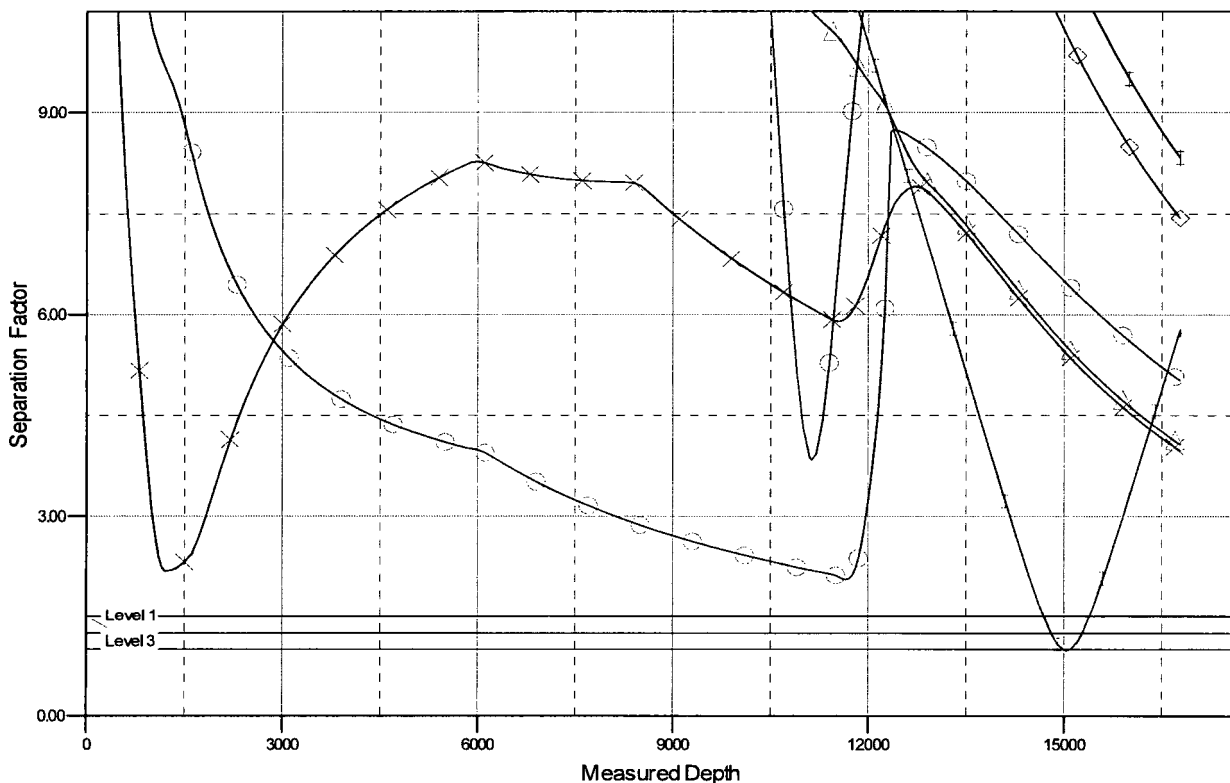

LEGEND

	Roybal Federal COM#1H-Wellbore #1, Survey#10		Charles Ling Fed Com #101H-Wellbore #1, Design#1110		Charles Ling Fed Com #102H-Wellbore #1, Design#1110
	Roybal Federal COM#1H-Wellbore #1, Survey#10		Charles Ling Fed Com #101H-Wellbore #1, Design#1110		Steven #11, Wellbore#11, Survey#10

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation