

**PECOS DISTRICT
DRILLING CONDITIONS OF APPROVAL**

HOBBS OCD
OCT 24 2018

RECEIVED

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMLC0063798
WELL NAME & NO.:	134H: Charles Ling Fed Com
SURFACE HOLE FOOTAGE:	330'/N & 731'/E
BOTTOM HOLE FOOTAGE:	240'/S & 330'/E
LOCATION:	T-24S, R-33E, S11. NMPM
COUNTY:	LEA, NM

Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	
Other	☐ 4 String Area	☐ Capitan Reef	☐ WIPP

A. Hydrogen Sulfide

1. Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The 13 3/8 inch surface casing shall be set at approximately **1365** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours

after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **9 5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The minimum required fill of cement behind the **5 1/2** inch production casing is:
 - Cement should tie-back at least **200** feet into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
- 2.

Option 1:

- i. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **13 3/8** inch surface casing shoe shall be **2000 (2M)** psi.
- ii. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9 5/8** inch intermediate casing shoe shall be **5000 (5M)** psi.

Option 2:

- i. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
- e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

D. SPECIAL REQUIREMENT(S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Waste Minimization Plan (WMP)

In the interest of resource development, submission of additional well gas capture development plan information is deferred but may be required by the BLM Authorized Officer at a later date.

MHH 09292018

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Chaves and Roosevelt Counties

Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.

During office hours call (575) 627-0272.

After office hours call (575)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the

plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMLC0063798
WELL NAME & NO.:	134H:Charles Ling Fed Com
SURFACE HOLE FOOTAGE:	330'/N & 731'/E
BOTTOM HOLE FOOTAGE	240'/S & 330'/E
LOCATION:	T-24S, R-33E, S11. NMPM
COUNTY:	LEA, NM

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Karst
 - Range
 - Watershed
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Cattle Guard Requirement

Any new or existing cattle guards on the access route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations. Once the road is abandoned, the fence would be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Livestock Watering Requirement

Structures that provide water to livestock, such as windmills, pipelines, drinking troughs, and earthen reservoirs, will be avoided by moving the proposed action.

Any damage to fences, cattle guards, and pipelines or structures that provide water to livestock during construction, throughout the life of the project, and caused by its operation, must be immediately corrected by Matador. Matador must notify the grazing allottee or the private surface landowner and the BLM-CFO (575-234-5972) if any damage occurs to pipelines or structures that provide water to livestock.

Production facilities on the well pads would be bermed to prevent oil, salt, and other chemical contaminants from leaving the pads. Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The berm shall be maintained through the life of the well and after interim reclamation has been completed.

Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion. Stockpiling of topsoil is required. The top soil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control.

Roads will be routed around sinkholes and other karst features to avoid or lessen the possibility of encountering near surface voids and to minimize changes to runoff or possible leaks and spills from entering karst systems. Turnout ditches and drainage leadoffs will not be constructed in such a manner as to increase or decrease the natural flow of water into or out of cave or karst features. The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, cave passages, or voids are penetrated during construction and no further construction will be done until clearance has been issued by the Authorized Officer. Special restoration stipulations or realignment may be required.

All spills or leaks should be reported to the BLM immediately for their immediate and proper treatment.

To avoid or lessen the potential of subsidence or collapse of karst features, toxic or combustible gas buildup, or other possible impacts to cave and karst resources from buried pipelines or cables, alignments may be rerouted to avoid karst features. The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, passages, or voids are intersected by trenching, and no pipe will be laid in the trench at that point until clearance has been issued by the Authorized Officer. Special restoration stipulations or realignment may be required at such intersections, if any. Leak detection systems, back flow eliminators, and differential pressure shut-off valves may be required to minimize the impacts of leaking or ruptured pipelines. To eliminate these extreme possibilities, good record keeping is needed to quickly identify leaks for their immediate and proper treatment.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch



All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

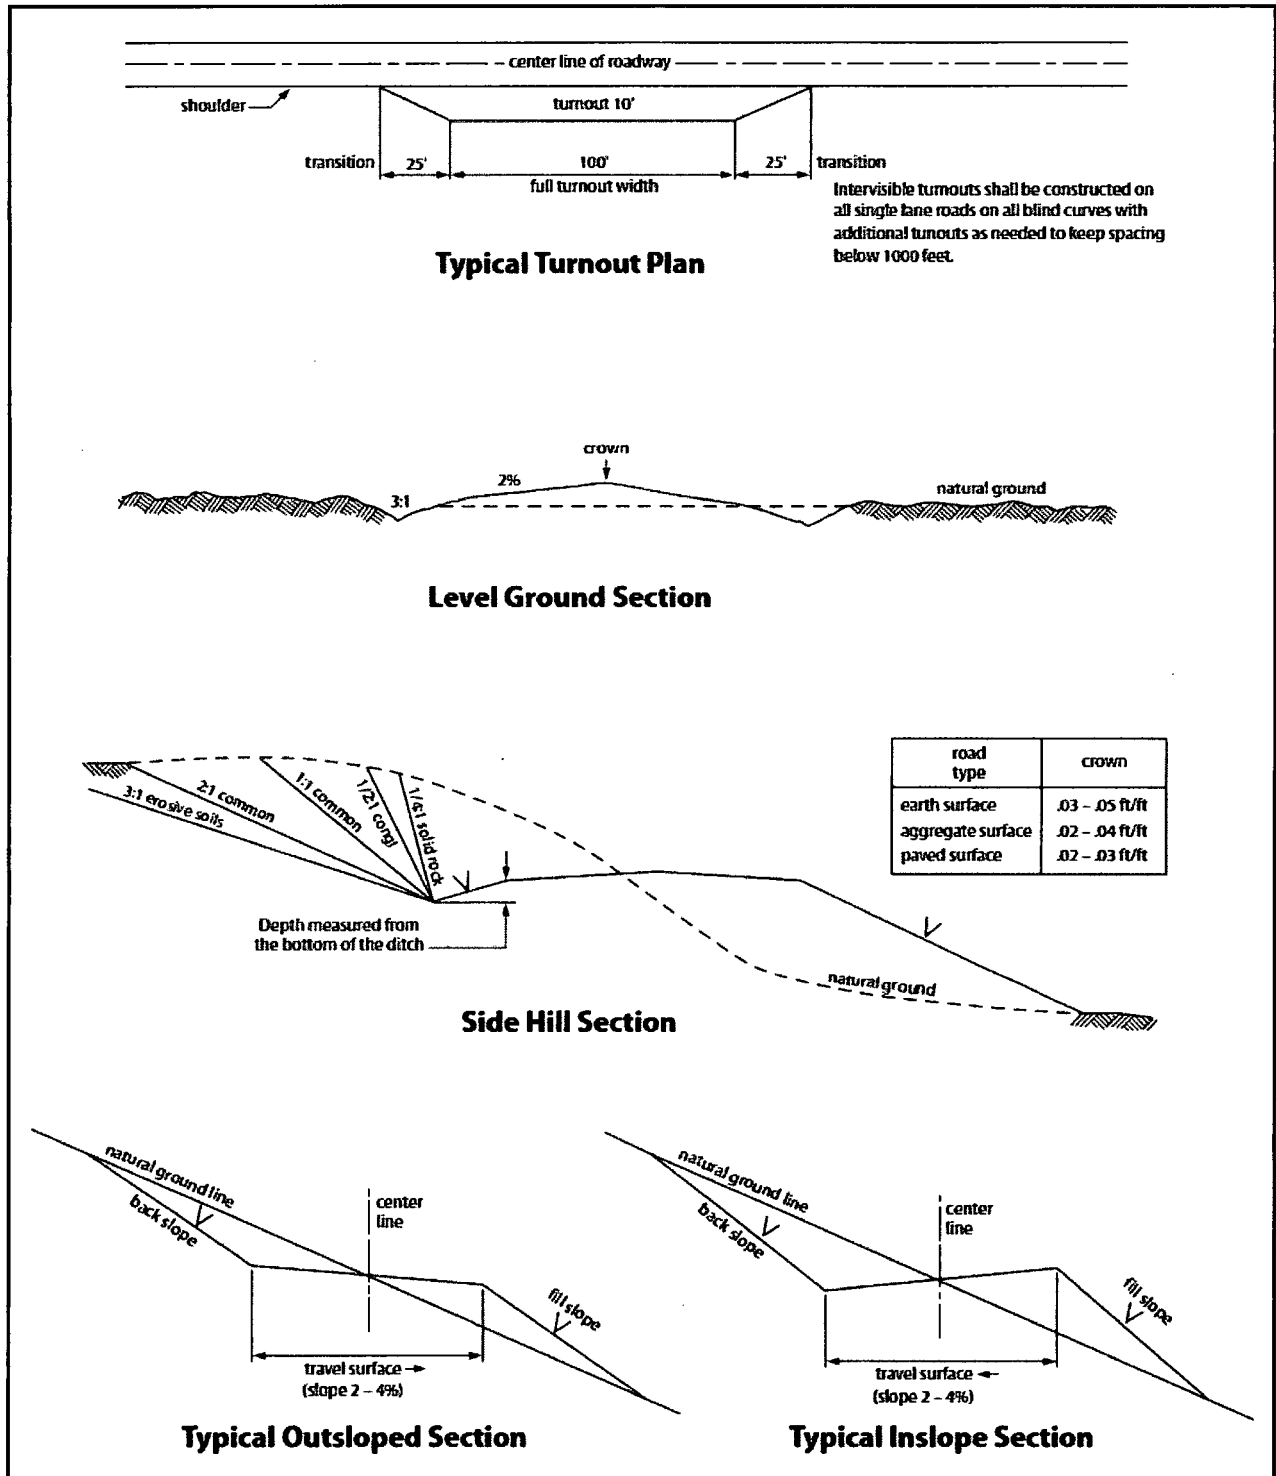


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:
- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| ☐ seed mixture 1 | ☐ seed mixture 3 |
| ☒ seed mixture 2 | ☐ seed mixture 4 |
| ☐ seed mixture 2/LPC | ☐ Aplomado Falcon Mixture |

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or

other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.

5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the

Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species	lb/acre
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

10/08/2018

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Brian Wood

Signed on: 07/31/2018

Title: President

Street Address: 37 Verano Loop

City: Santa Fe

State: NM

Zip: 87508

Phone: (505)466-8120

Email address: afmss@permitswest.com

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



Hydrogen Sulfide Drilling

Operations Plan

Matador Resources

1 H2S safety instructions to the following:

- Characteristics of H2S
- Physical effects and hazards
- Principal and operation of H2S detectors, warning system and briefing areas
- Evacuation procedures, routes and first aid
- Proper use of safety equipment & life support systems
- Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30min pressure demand air packs

2 H2S Detection and Alarm Systems:

- H2S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure / cellar area, on the mud pits in the shale shaker area. Additional H2S detectors may be placed as deemed necessary
- An audio alarm system will be installed on the derrick floor and in the doghouse

3 Windsocks and / Wind Streamers:

- Windsocks at mud pit area should be high enough to be visible
- Windsock on the rig floor and / top of doghouse should be high enough to be visible

4 Condition Flags and Signs:

- Warning sign on access road to location
- Flags to be displayed on sign at entrance to location
 - Green Flag – Normal Safe Operation Condition
 - Yellow Flag – Potential Pressure and Danger
 - Red Flag – Danger (H2S present in dangerous concentrations) Only H2S trained personnel admitted on location

5 Well Control Equipment:

- See Exhibit E-1

6 Communication:

- While working under masks chalkboards will be used for communications
- Hand signals will be used where chalk board is inappropriate
- Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.



7 Drilling Stem Testing:

- No DST cores are planned at this time

8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubulars good and other mechanical equipment

9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary

11 Emergency Contacts

- See exhibit E-6

Exhibit E-6: H2S Contingency Plan Emergency Contacts
Charles Ling Fed Com Slot 4
Wells 134H, 204H, & 214H
Matador Resources Company
Sec. 11, 24S, 33E
Lea County, NM


<u>Company Office</u>			
Matador Resources Company		(972)-371-5200	
<u>Key Personnel</u>			
Name	Title	Office	Mobile
Billy Goodwin	Vice President Drilling	972-371-5210	817-522-2928
Dee Smith	Drilling Superintendent	972-371-5447	972-822-1010
Blake Hermes	Drilling Engineer	972-371-5485	713-876-8558
	Construction Superintendent		
	Construction Superintendent		
<u>Artesia</u>			
Ambulance		911	
State Police		575-746-2703	
City Police		575-746-2703	
Sheriff's Office		575-746-9888	
Fire Department		575-746-2701	
Local Emergency Planning Committee		575-746-2122	
New Mexico Oil Conservation Division		575-748-1283	
<u>Carlsbad</u>			
Ambulance		911	
State Police		575-885-3137	
City Police		575-885-2111	
Sheriff's Office		575-887-7551	
Fire Department		575-887-3798	
Local Emergency Planning Committee		575-887-6544	
New Mexico Oil Conservation Division		575-887-6544	
<u>Santa Fe</u>			
New Mexico Emergency Response Comission (Santa Fe)		505-476-9600	
New Mexico Emergency Response Comission (Santa Fe) 24 hrs		505-827-9126	
New Mexico State Emergency Operations Center		505-476-9635	
<u>National</u>			
National Emegency Response Center (Washington, D.C.)		800-424-8802	
<u>Medical</u>			
Flight for Life- 4000 24th St.; Lubbock, TX		806-743-9911	
Aerocare- R3, Box 49F; Lubbock, TX		806-747-8923	
Med Flight Air Amb- 2301 Yale Blvd S.E., D3; Albuquerque, NM		505-842-4433	
SB Air Med Service- 2505 Clark Carr Loop S.E.; Albuquerque, NM		505-842-4949	
<u>Other</u>			
Boots & Coots IWC		800-256-9688	or 281-931-8884
Cudd Pressure Control		432-699-0139	or 432-563-3356
Haliburton		575-746-2757	
B.J. Services		575-746-3569	

Matador Production Company

Charles Ling Fed Com Slot 4 Pad
Well #'s 134H, 204H, & 214H
H2S Contingency Plan:
2 Mile Radius Map

Section 11, T.23S R.33E
Lea County, New Mexico



 Surface Hole Location



NAD 1983 New Mexico State Plane East
FIPS 3001 Feet

PERMITS WEST
A DIVISION OF

Prepared by Permits West, Inc., May 15, 2018
for Matador Production Company

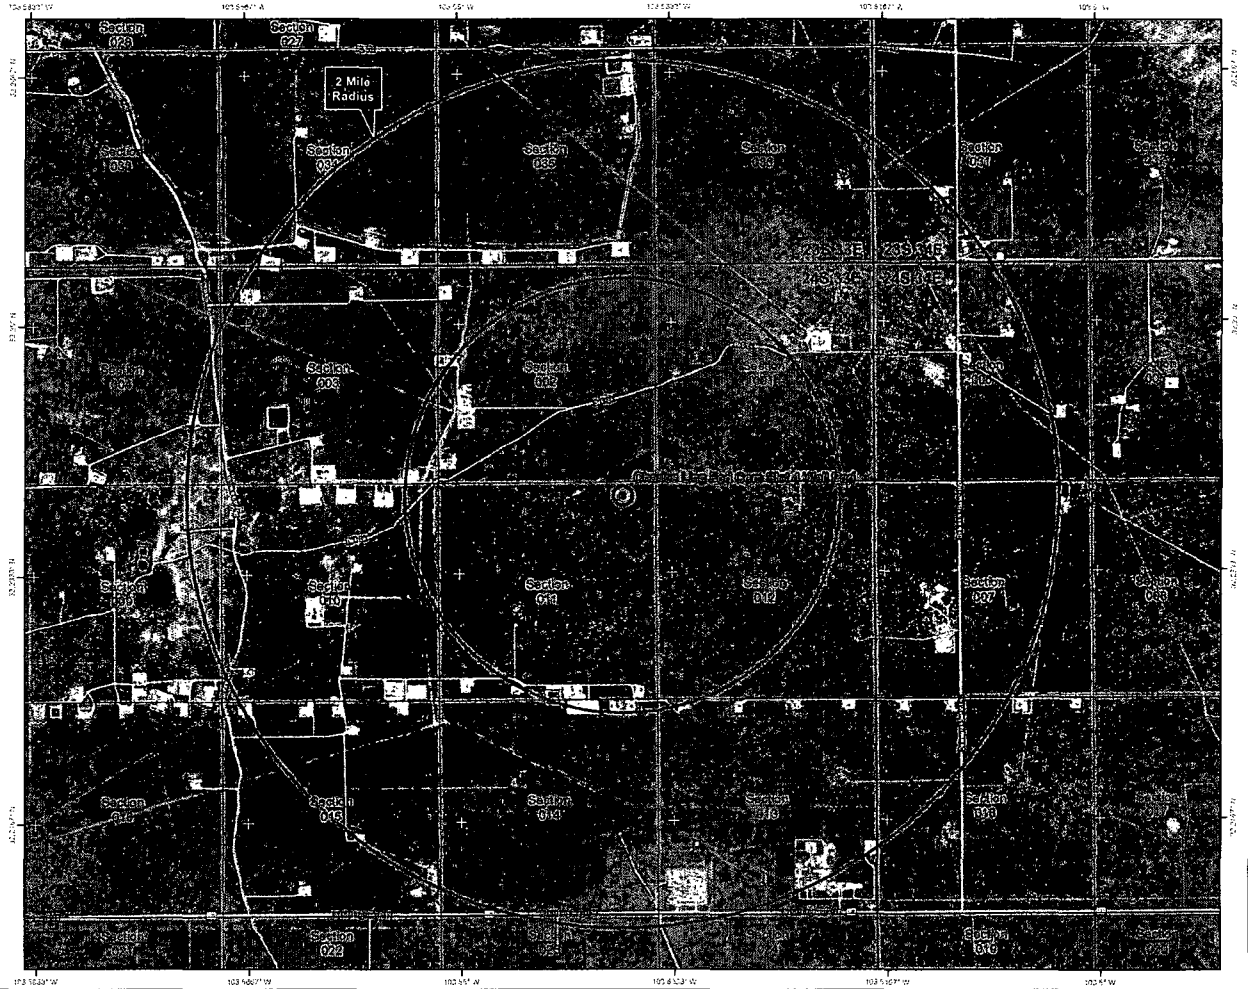

Rig Diagram

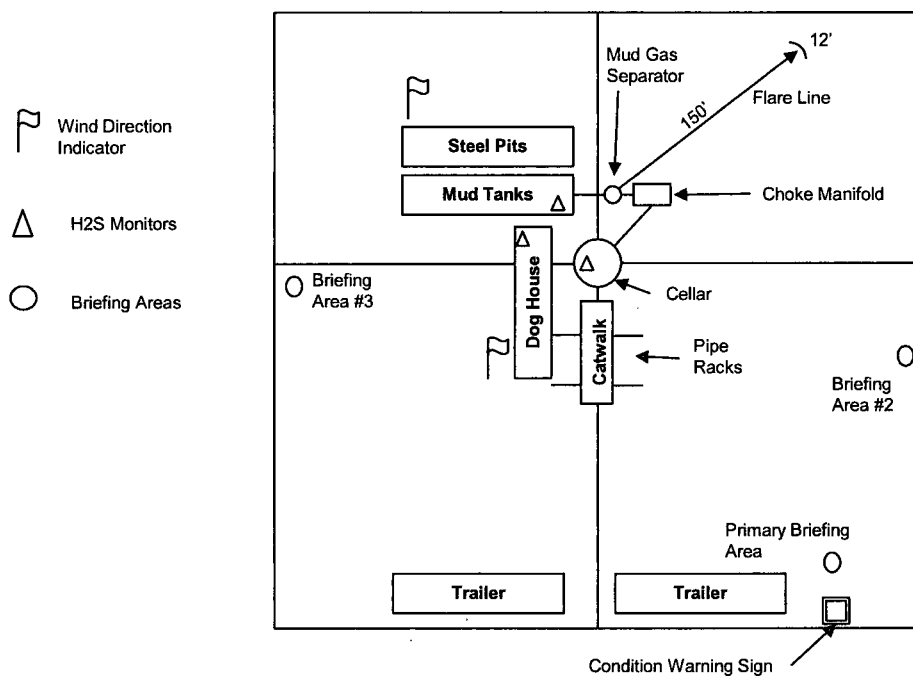


Exhibit E-3: Rig Diagram
Charles Ling Fed Com
Slots 1, 2, 3, & 4 Well Pads
Matador Resources Company
11-24S-33E
Lea County, NM



Figure 3:
Drilling Rig Layout



HYDROGEN SULFIDE CONTINGENCY PLAN Drilling, Testing, & Completion

MRC ENERGY CO.

Charles Ling Fed Com Slot 4 Wells

Reviewers

----- Operations Manager
----- Operations Supt.
----- Staff RES
----- Field Supv.
Blake Hermes---Engineering

**Latitude: 32.2384" N
Longitude: 103.5367" W**

**Charles Ling Fed Com #134
SHL 330' FNL & 731' FEL, Sec. 11
BHL 240' FSL & 988' FEL, Sec. 11**

**Charles Ling Fed Com #204
SHL 330' FNL & 761' FEL, Sec. 11
BHL 240' FSL & 330' FEL, Sec. 11**

**Charles Ling Fed Com #214
SHL 330' FNL & 791' FEL, Sec. 11
BHL 240' FSL & 988' FEL, Sec. 11**

H2S Contingency Plan # 0165

Revision# 0

This H2S Contingency Plan is subject to updating

Effective date: July 8, 2015

TABLE OF CONTENTS

I.	INTRODUCTION	3
II.	PURPOSE	4
	A. Operating Procedures	5
	B. Procedures to be Initiated Prior to reaching H2S Contingency Plan Compliance	6
	C. Drilling Below Contingency Plan Depth	7
	D. Procedures program	7
III.	CONDITIONS & H₂S EMERGENCY PROCEDURES	10
	A. Definition of Operational "Conditions"	10
	B. H2S Emergency Procedures; In Scope Personnel	12
	C. Instructions for Igniting the Well	16
	D. Coring	17
	E. Normal Operations	18
IV.	SAFETY EQUIPMENT	21
V.	TOXICITY OF VARIOUS GASES	23
VI.	PROPERTIES OF GASES	24
VII.	TREATMENT PROCEDURES FOR H2S POISONING	25
VIII.	BREATHING AIR EQUIPMENT DRILLS ON/OFF DUTY	26
IX.	HYDROGEN SULFIDE TRAINING CURRICULUM	27
X.	FIT TEST	29
XI.	H2S EQUIPMENT LIST	30
XII.	EMERGENCY PHONE NUMBERS	32
XIII.	EVACUATION OF GENERAL PUBLIC	37
XIV.	SEPCO EMERGENCY PHONE NUMBERS AND DIRECTIONS TO WELL SITE	38
XV.	ROE MAP (RADIUS OF EXPOSURE)	39
XVI.	RESIDENCE LIST WITHIN ROE	40

INTRODUCTION

The H₂S equipment will be rigged up 2 days prior to reaching a potential H₂S containing zone. Drilling into any potential H₂S zone shall not commence until the on-site MRC Drilling Supervisor has confirmed this plan in place.

The onsite Drilling Foreman will give Total Safety one week (7 days) notice to prepare for rig up of H₂S equipment)

To be effective, the plan requires the cooperation and effort of each person participating in the drilling of an H₂S well. Each person must know his/her responsibilities and all emergency and safety procedures. He/she should thoroughly understand and be able to use with accuracy, all safety equipment while performing his/her normal duties, if the circumstance should arise. He/she should therefore familiarize himself/herself with the location of all safety equipment and check to see that it is properly stored, easily accessible at all times, and routinely maintained.

It is the intention of MRC ENERGY CO. and the Drilling Contractor to make every effort to provide adequate safeguards against harm to persons on the rig and in the immediate vicinity from the effects of hydrogen sulfide, which may be released into the atmosphere under emergency conditions. However, the initiative rests with the individual in utilizing the safeguards provided. The ideas and suggestions of the individuals involved in the drilling of this well are highly welcomed and act as a fundamental tool for providing the safest working conditions possible.

The drilling representative is required to enforce these procedures. They are set up for your safety and the safety of all others.

II. PURPOSE

It is MRC Energy Co.'s intent to provide a safe working place, not only for its employees, but also for other contractors who are aiding in the drilling of this well. The safety of the general public is of utmost concern. All precautions will be taken to keep a safe working environment and protect the public.

There is a possibility of encountering toxic hydrogen sulfide gas. Safety procedures must be adhered to in order to protect all personnel connected with the operations as well as people living within the area.

The MRC Energy Co. representative will enforce all aspects of the H2S Contingency Plan. This job will become easier by a careful study of the following pages and training and informing all personnel that will be working on the well, their duties and responsibilities.

A. OPERATING PROCEDURES

DEFINITIONS:

For purpose of this plan, on-site personnel shall be referred to as “In Scope Personnel” or “Out of Scope Personnel”, per the following definitions:

In Scope Personnel – Personnel who will be working or otherwise present in potential H₂S release areas, including the rig floor, cellar, pits, and shaker areas.

Out of Scope Personnel – Personnel who will not be working or Otherwise present in potential H₂S areas. Such personnel include rig Site visitor, delivery and camp services personnel.

GENERAL:

Before this H₂S contingency plan becomes operational, all regularly assigned In Scope Personnel (primarily the MRC, drilling contractor, and certain service personnel,) shall be thoroughly trained in the use of breathing equipment, emergency procedures, and responsibilities. Total Safety Technician or a designee assigned by the MRC Drilling Foreman shall keep a list of all personnel who have been through the on-site H₂S training program at the drill site.

All In Scope Personnel shall be given H₂S training and the steps to be taken during H₂S conditions under which the well may be drilled. General information will be explained about toxic gases, as well as the physiological effects of H₂S and the various classified operating conditions. In addition, the reader will be informed his/her general responsibility concerning safety equipment and emergency procedures.

The Total Safety H₂S Safety Technician or MRC on-site RSE Technician shall make available the H₂S Contingency Plan for all personnel to review.

Without exception, all personnel that arrive on location must proceed directly to and sign-in with the on-site MRC RSE Technician. In Scope Personnel will be required to complete an on-site H₂S training and respirator fit testing before starting work, or produce evidence that they have received equivalent training. Out of Scope Personnel will be required to complete a site H₂S awareness and general safety briefing. This briefing will consist of a H₂S hazard overview, alarm review and required response to alarms.

B. PROCEDURES TO BE INITIATED PRIOR TO H₂S CONTINGENCY PLAN COMPLIANCE:

A list of emergency phone numbers and contacts will be on location and posted at the following locations:

1. MRC ENERGY CO.'S Representative's Office
2. Drilling Contractor's, Toolpusher Office
3. Living Quarters Area

All safety equipment and H₂S related hardware must be set up as required by MRC Energy Co. with regard to location of briefing areas, breathing equipment, etc. All safety equipment must be inspected periodically (at least weekly) with particular attention to resuscitators and breathing equipment.

In Scope Personnel working in the well site area will be assigned breathing apparatus. Operator and drilling contractor personnel required to work in the following areas will be provided with Self Contained Breathing Apparatus:

1. Rig Floor
2. Mud Pits
3. Derrick
4. Shale Shaker
5. Cellar

The Total Safety H₂S Safety Technician will be responsible for rigging up all H₂S continuous monitoring-type detectors. The Total Safety Technician will monitor and bump test the detector units periodically (at least at least once a week to test alarm function during drilling conditions. In the event H₂S is detected, or when drilling in a zone confirmed to contain H₂S, the units shall be bump tested at least once every 24 hours. A bump test/calibration log will be kept on location. All results will be reported to the MRC on-site Drilling Foreman.

All Total Safety H₂S equipment will be maintained and inspected by a Total Safety Technician on at least a Weekly basis.

C. DRILLING BELOW CONTINGENCY PLAN DEPTH

H₂S response drills will be held at least once per week if possible or as often as necessary to acquaint the crews and service company personnel of their responsibilities and the proper procedures to shut-in a well. Initial drills will be performed until crews demonstrate competency donning and working under mask. After the MRC Energy Co.'s representative is satisfied with initial blowout drill procedures, a drill will be conducted weekly with each crew, as necessary. The H₂S Safety Technician or designee will conduct safety talks and maintain the safety equipment, consult and carry out the instructions of the drilling supervisor. All personnel allowed in the well work area during drilling or testing operations will be instructed in the use of breathing equipment until supervisory personnel are satisfied that they are capable of using it.

After familiarization, each person must perform a drill with breathing equipment. The drill should include getting the breathing equipment, donning the breathing apparatus, and performing expected duties for a short period. A record shall be kept of all personnel drilled and the date of the drill. H₂S training records will be kept on location for all personnel.

Rig crews and service company personnel shall be made aware of the location of spare air bottles, resuscitation equipment, portable fire extinguishers, H₂S monitors and detectors. Knowledge of the location of the H₂S monitors and detectors are vital in determining as our gas location and the severity of the emergency conditions.

After any device has initially detected H₂S, all areas of poor ventilation shall be inspected periodically by means of a portable H₂S detector instrument. The buddy system will be utilized. (When an alarm sounds, personnel will don an SCBA, shut the well in, and proceed to SBA for roll call. The H₂S Technician or designee will mask up, with a buddy and will verify source of H₂S and report back to the on-site MRC Foreman.)

D. PROCEDURES PROGRAM

1. Drill Site

- a. The drilling rig will be located to allow prevailing winds to blow across the reserve pit.
- b. A Safe Briefing Area will be provided with a breathing air cascade trailer and or 30-minute SCBA's at the Primary Area. Personnel will assemble at the most up-wind station under alarm conditions, or when so ordered by the MRC Energy Co. representative, the Contractor representative, or

the Total Safety H₂S Safety Technician. Windsocks or streamers will be anchored to various strategic places on a pole about 10 feet high, so it is in easy view from the rig floor at all times.

- c. Warning signs will be posted on the perimeters. "No Smoking" signs will be posted by MRC Energy Co. as well.
- d. One multi-channel automatic H₂S monitor will be provided by Total Safety and the detector heads will be at the shale shaker, bell nipple, mud pits, rig floor, and quarter's area. The monitor will be located inside HSE or Company man trailer. Should the alarm be shut off to silence the sirens, the blinker light must continue to warn of H₂S presence. The Total Safety H₂S Safety Technician or designee will continuously monitor the detectors and will reactivate the alarm if H₂S concentrations increase to a dangerous level.
- e. A method of escape will be open at all times.
- f. If available, land line telephone service will be provided or cell phones provided. (Primary communications provided)
- g. A rig communication system will be provided, as needed.
- h. A gas trap, choke manifold, and degasser will be installed.
- i. A kill line, securely anchored and of ample strength, will be laid to the well-head from a safe location. This line is to be used only in an emergency.

General

- a. The MRC Energy Co. representative and/or the Contractor's Toolpusher will be available at all times. The drilling supervisor, while on duty, will have complete charge of the rig and location operations and will take whatever action is deemed necessary to insure personnel safety, to protect the well, and to prevent damage.
- b. A Mud Engineer will be on location at all times when drilling takes place at the depth H₂S may be expected. The mud engineer will be able to verify the presence or absence of H₂S.

III. CONDITIONS AND EMERGENCY PROCEDURES

A. DEFINITION OF OPERATIONAL "CONDITIONS"

CONDITION I	"POSSIBLE DANGER"
Warning Flags	Green
Alarms	No Alarm. Less than 10 ppm
Characterized By:	Drilling operations in zones that may contain hydrogen sulfide. This condition remains in effect unless H ₂ S is detected and it becomes necessary to go to Condition II.
General Action:	a. Be alert for a condition change b. Check all safety equipment for availability and proper functioning. c. Perform all drills for familiarization and proficiency.
CONDITION II	"MODERATE DANGER"
Warning Flags	Yellow
Alarms:	Actuates at 10 ppm. Continuous flashing light.
Characterized By:	Drilling operations in zones containing hydrogen sulfide. This condition will remain in effect until adding chemicals to the mud system neutralizes the hydrogen sulfide or it becomes necessary to go to Condition III.
General Action:	a. Be alert for a condition change b. WHEN DRILLING AHEAD - Driller and designated crewmember will don 30 min SCBA, shut-in the well and immediately proceed to the Safe Briefing Area. WHEN TRIPPING – Driller and two designated crewmembers will don 30 min SCBA, shut in the well and immediately proceed to the Safe Briefing Area. The Derrickman will

don a 5-minute escape pack, descend to the rig floor, don a 30-min SCBA (if necessary) and immediately proceed to the Safe Briefing Area.

- c. All In Scope Personnel will proceed directly to the appropriate Safe Briefing Area.
- d. Remain in safe briefing area, take roll call and wait for instructions
- e. Contact the Total H₂S Technician if not on location.
- f. Personnel shall ensure that their breathing apparatus is properly fitted and operational before entering an H₂S contaminated area to provide assistance to anyone who may be injured or overcome by toxic gases.
- g. All Out of Scope Personnel will report to the appropriate Safe Briefing Area.

CONDITION III “EXTREME DANGER”

Warning Flags

Red

Alarms

Actuate at 15 ppm. Continuous Sirens and Flashing Lights

Characterized by:

Critical well operations which pose an immediate threat of H₂S exposure to on-site personnel and a potential threat to the public.

General Action:

- a. **WHEN DRILLING AHEAD -**
Driller and designated crewmember will don 30 min SCBA, shut-in the well and immediately proceed to the Safe Briefing Area.
- WHEN TRIPPING –** Driller and two designated crewmembers will don 30

min SCBA, shut in the well and immediately proceed to the Safe Briefing Area. The Derrickman will don a 5-minute escape pack, descend to the rig floor, don a 30-min SCBA (if necessary) and immediately proceed to the Safe Briefing Area.

- b. All In Scope Personnel should don SCBA if nearby and immediately proceed to Safe Briefing Area. If SCBA is not nearby at time of alarm, DO NOT GO TOWARDS RIG AREA, but proceed directly to the Safe Briefing Area
- c. All out of Scope Personnel shall evacuate the location.
- d. Remain in the Safe Briefing Area, take roll call and wait for instructions.
- e. Contact the Total H2S Technician if not on location.
- f. Personnel shall ensure that their breathing apparatus is properly fitted and operational before entering an H₂S contaminated area to provide assistance to anyone who may be injured or overcome by toxic gases. Use the buddy system.
- g. Remain in safe briefing area, take roll call and wait for instructions.
- h. A cascade breathing air system shall be mobilized and utilized to conduct any additional on rig work required to correct the H₂S release condition.
- i. If well is ignited do not assume area is safe. SO₂ is hazardous and not all H₂S will burn.

H₂S EMERGENCY PROCEDURES; IN SCOPE PERSONNEL

A. Day To Day Drilling Operations

1. Upon discovering a release of H₂S gas in the ambient air by warning alarms or in any other way **Do Not Panic**.
2. Hold your breath donning the nearest Self Contained Breathing Apparatus and rapidly move up or across-wind away from the areas where H₂S sensing devices are in place, to the closest available safe briefing area. Continue to use breathing apparatus until it has been determined that the exposure of H₂S gas in the ambient air no longer exists. **Do Not Panic!**
3. Utilize the "Buddy System", i.e.; select and pair up each person participating in the drilling of an H₂S well prior to an emergency situation.
4. Help anyone who is overcome or affected by the H₂S gas by taking him/her up-wind out of the contaminated area. (This should be done utilizing an SCBA and with a buddy.)
5. Take necessary steps to confirm the release of the H₂S gas into the ambient air.
 - When an H₂S alarm activates, two designated personnel using the buddy system, while wearing their self contained breathing apparatus, will determine by the read-out on the fixed monitor which sensing device has detected the release of the H₂S gas.
 - They will utilize the hand-held sniffer type device at the particular sensing point disclosed on the fixed monitor to corroborate the fact that H₂S gas has actually been released. This will rule out the possibility of a false alarm. This will be done with a buddy and under mask after reporting to the Safe Briefing Area for roll call and instructions by on-site MRC Foreman.
6. Refer to the Emergency Phone Numbers and call emergency personnel.
7. Take the necessary steps to suppress the release of H₂S gas into the ambient air. Comply with the MRC Energy Co. Representative to physically suppress the release of H₂S gas at the actual release point.

8. Check all of MRC Energy Co.'s monitoring devices and increase gas-monitoring activities with the portable hand-operated H₂S and gas detector units.

Do Not Panic!

The MRC Energy Co. representative will assess the situation and with assistance of the Contractor's Representative and Total Safety's H₂S Safety Technician or on site designee, will assign duties to each person to bring the situation under control.

B. RESPONSIBILITIES OF WELL-SITE PERSONNEL

In the event of a release of potentially hazardous amounts of H₂S, all personnel will immediately don their protective breathing apparatus, the well will be shut in and personnel will proceed upwind to the nearest designated safe briefing area for roll call and instructions by MRC Foreman. Consideration will be given to evacuating Out of Scope Personnel, as situation warrants.

1. MRC ENERGY CO.'S Well-site Representatives

- a. If MRC Energy Co.'s well-site representative is incapacitated or not on location, this responsibility will fall to the Toolpusher/Driller.
- b. Immediately upon assessing the situation, set this plan into Action by initiating the proper procedures to contain the gas and notify the appropriate people and agencies.
- c. Ensure that the alarm area indicated by the fixed H₂S Monitor is checked and verified with a portable H₂S detector. (Safety Technician if on location or MRC assigned designee with a buddy utilizing SCBA's)
- d. Consult Pusher/driller of remedial actions as needed.
- e. Ensure that non-essential personnel proceed to the safe briefing area.
- f. Ensure location entrance barricades are positioned. Keep the number of persons on location to a minimum during hazardous operations.

- g. Consult each contractor, Service Company and all others allowed to enter the site, that H₂S gas may be encountered and the potential hazards that may exist.
- h. Authorize the evacuation of local residents if H₂S threatens Their safety.
- i. Non essential personnel should be evacuated from location if Situation warrants.

2. Toolpusher

- a. Toolpusher/Driller will assume responsibilities of MRC Energy Co.'s well-site representative if that person is incapacitated or not on location.
- b. Ensure that the alarm area indicated by the fixed H₂S monitor is checked and verified with a portable H₂S gas detector. (Alarm area indicated by the monitor will be Checked by the H₂S Technician and a buddy, under mask.) This will be done after checking in and roll call at the Upwind Safe Briefing Area.
- c. Confer with MRC Energy Co.'s well-site representative or superintendent and direct remedial action to suppress the H₂S and control the well.
- d. Ensure that personnel at the safe briefing area are instructed on emergency actions required.
- e. Ensure that personnel at the drill floor area are instructed on emergency actions required.
- f. Ensure that all personnel observe the appropriate safety and emergency procedures.
- g. Ensure that all persons are accounted for and provided emergency assistance as necessary.

3. Mud Engineer

- a. Run a sulfide check on the flowline mud.
- b. Take steps to determine the source of the H₂S and suppress it. Lime and H₂S scavenger shall be added to the mud as necessary.

4. Total H₂S Safety Technician, if on location, or MRC Designee

- a. H₂S Safety Technician or designee don nearest SCBA and report to Safe Briefing Area for roll call, take a buddy masked up and check monitor and verify with a portable H₂S detector the alarm area indicated by the fixed H₂S monitor. Advise the Toolpusher/Driller and MRC Energy Co.'s well-site representative of findings. Record all findings.
- b. If H₂S is flared, check for sulfur dioxide (SO₂) near the flare as necessary. Take hourly readings at different perimeters, log readings and record on location.
- c. Ensure that personnel at the safe briefing area are instructed on emergency actions required.
- d. Ensure that the appropriate warning flags are displayed.
- e. Ensure that all personnel are in S.C.B.A. as necessary.
- f. Ensure that all persons are accounted for and provide emergency assistance as necessary.
- g. Be prepared to evacuate rig if order is issued.

5. General Personnel & Visitors

- a. All In Scope Personnel, if not specifically designated to shut the well in or control the well, shall proceed to the (upwind) safe briefing area. All Out of Scope Personnel shall immediately proceed to the appropriate (upwind) safe briefing area or evacuate the site as conditions warrant.

- b. During any emergency, use the “buddy” system to prevent anyone from entering or being left in a gas area alone, even wearing breathing apparatus.
- c. Provide assistance to anyone who may be injured or overcome by toxic gases. Personnel shall ensure that their breathing apparatus is properly fitted and operational before entering a potentially H₂S contaminated area.
- d. Remain in safe briefing area and wait for instructions.

C. INSTRUCTIONS FOR IGNITING THE WELL

1. The Toolpusher/Driller will confer with MRC Energy Co.'s well-site representative who will secure the approval of the “Texas Wells Delivery Manager, prior to igniting the well, if at all possible.

The Toolpusher/Driller will be responsible for igniting the well in the event of severe well control problems. This decision should be made only as a last resort in situations where it is clear that:

- a. Human life and property are endangered, or
 - b. There is no hope of controlling the well under current conditions.
2. Once the decision has been made, the following procedures should be followed:
 - a. Two people wearing self-contained breathing apparatus will be needed for the actual lighting of the well. They must first establish the flammable perimeter by using an explosimeter. This should be established at 30% to 40% of the lower flammable limits.
 - b. After the flammable perimeter has been established and everyone removed from the area, the ignition team should select a site upwind of the well from which to ignite the well. This site should offer the maximum protection and have a clear path for retreat from the area.

- c. The ignition team should have safety belts and lifeline attached and manned before attempting ignition. If the leak is not ignited on the first attempt, move in 20 to 30 feet and fire again. Continue to monitor with the explosimeter and NEVER fire from an area with over 75% of the Lower Explosive Limit (LEL). If having trouble igniting the well, try firing 40 degrees to 90 degrees on either side of the well.
- d. If ignition is not possible due to the makeup of the gas, the toxic perimeter must be established and evacuation continued until the well is contained.
- e. All personnel must act only as directed by the person in charge of the operations.

NOTE: After the well is ignited, burning hydrogen sulfide (H_2S) will convert to sulfur dioxide (SO_2), which is also a highly toxic gas.

DO NOT ASSUME THE AREA IS SAFE AFTER THE WELL IS IGNITED

D. CORING PROCEDURES

Only essential personnel shall be on the rig floor. Ten (10) stands prior to retrieving core barrel; all personnel on drill floor and in derrick shall confirm self-Contained breathing apparatus available and ready for use.

A Total H₂S Technician will don a SCBA with a buddy assigned from the rig crew, and continuously monitor for H₂S at each connection. Any levels detected will require operations to be shut down and all involved personnel to don SCBAs. Precautions will remain in place until barrel is laid down.

All involved personnel will don SCBAs when removing the inner barrel from the outer barrel. SCBAs can be removed once the absence of H₂S is confirmed by the Total H₂S Technician.

Cores will be appropriately marked and sealed for transportation.

Normal Operations

1. Responsibilities of well-site personnel

a. Well-site Representative

1. Notify H₂S Technician of expected date to reach Contingency Plan implementation depth (Two (2) days prior to reaching suspected H₂S bearing zone) or prior to starting well work.
2. Ensure H₂S Safety Technician completes rig-up procedures prior to reaching Contingency Plan effective depth.
3. Restrict the number of personnel at the drilling rig or well site to a minimum while drilling, starting well work, testing or coring.
4. Ensure weekly H₂S drills/training are performed, if possible.

B. Toolpusher

1. Ensure that necessary H₂S safety equipment is provided on the rig, and that it is properly inspected and maintained.
2. Ensure that all personnel that work in the well area, are thoroughly trained in the use of H₂S safety equipment and periodic drills are held to maintain an adequate level of proficiency.

C. In Scope Personnel

1. Remain clean-shaven. Beards and long sideburns do not allow a proper facepiece seal.
2. Receive H₂S safety training on location, or confirm prior training by certification that is one year within date.
3. Familiarize yourself with the rig's Contingency Plan.
4. Inspect and practice putting on your breathing apparatus.

5. Know the location of the "safe briefing areas".
6. Keep yourself "wind conscious". Be prepared to quickly move upwind and away in the event of any emergency involving release of H₂S.

D. Total Safety H₂S Safety Technician or MRC Designee

1. Conduct training as necessary to ensure all personnel working in well area are familiar with the contingency procedures and the operation of emergency equipment.
2. Check all H₂S safety equipment to ensure that it is ready for emergency use:
 - Check pressure weekly for each shift on breathing apparatus (both 30-minute and hip-packs) to make sure they are charged to full volume.
 - Check pressure on cascade air bottles, if on location, to see that they are capable of recharging breathing apparatus.
 - Check oxygen resuscitator, if on location, to ensure that it is charged to full volume.
 - Check H₂S detectors weekly for each shift (fixed and portable), and explosimeter, to ensure they are working properly.
3. Provide a weekly report to MRC Energy Co.'s well-site representative documenting:
 - Calibrations performed on H₂S detectors.
 - Proper location and working order of H₂S safety equipment.
 - Attendance of all personnel, trained or retrained, and their company.
 - Weekly drills, if held and a list of personnel participating and summary of actions.

OUT OF SCOPE PERSONNEL

MRC Energy Co. policy will not require Out of Scope Personnel to be clean shaven, have processed medical questionnaires, fit testing, or have certified H2S Training.

SAFETY EQUIPMENT

All respirators will be designed, selected, used and maintained in conformance with ANSI Z88.2, American National Standard for respiratory protection.

Personal protective equipment must be provided and used. Those who are expected to use respiratory equipment in case of an emergency will be carefully instructed in the proper use and told why the equipment is being used. Careful attention will be given to the minute details in order to avoid possible misuse of the equipment during periods of extreme stress.

Self-contained breathing apparatus provides complete respiratory and eye protection in any concentration of toxic gases and under any condition of oxygen deficiency. The wearer is independent of the surrounding atmosphere because he/she is breathing with a system admitting no outside air. It consists of a full face mask, breathing tube, pressure demand regulator, air supply cylinder, and harness. Pure breathing air from the supply cylinder flows to the mask automatically through the pressure demand regulator which reduces the pressure to a breathing level. Upon inhalation, air flows into the mask at a rate precisely regulated to the user's demand. Upon exhalation, the flow to the mask stops and the exhaled breath passes through a valve in the face piece to the surrounding atmosphere. The apparatus includes an alarm & gauge which warns the wearer to leave the contaminated area for a new cylinder of air or cylinder refill.

The derrickman is provided with a full face piece unit attached to a 5– minute escape cylinder. He will also have his own self-contained 30-minute unit breathing apparatus located on the drilling floor. He will use the 5-minute unit to exit the derrick to the floor, donning the 30-minute unit located on the floor, if needed.

All respiratory protective equipment, when not in use, should be stored in a clean, cool, dry place, and out of direct sunlight to retard the deterioration of rubber parts. After each use, the mask assembly will be scrubbed with soap and water, rinsed thoroughly, and dried. Air cylinders can be recharged to a full condition from a cascade system.

Personnel in each crew will be trained in the proper techniques of bottle filling.

The primary piece of equipment to be utilized, should anyone be overcome by hydrogen sulfide, is the oxygen resuscitator, if on location.

When asphyxiation occurs, the victim must be moved to fresh air and immediately given artificial respiration. In order to assure readiness, the bottles of oxygen will be checked at regular intervals and an extra tank kept on hand.

Hand-operated pump-type detectors incorporating detector tubes will give more accurate readings of hydrogen sulfide. The pump-type draws air to be tested through the detector tube containing lead acetate-silica gel granules. Presence of hydrogen sulfide in the air sample is shown by the development of a dark brown stain on the granules, which is the

scale reading of the concentration of hydrogen sulfide. By changing the type of detector tube used, this detector may also be used for sulfur dioxide (SO₂) detection when hydrogen sulfide (H₂S) is being burned in the flare area.

Provisions must be made for the storage of all safety equipment as is evident from the foregoing discussion. All equipment must be stored in an available location so that anyone engaged in normal work situations is no more than "one breath away" from a mask.

V – TOXICITY OF VARIOUS GASES

Lethal Common Name ppm⁴	Chemical Formula	Specific Gravity¹	PEL (OSHA)²	STEL³
Hydrogen Cyanide 300	HCN	0.94	10	150
Hydrogen Sulfide 600	H ₂ S	1.18	20	Peak- 50ppm
Note: The ACGIH(7) recommends a TWA(6) value of 10ppm as the TLV(5) for H ₂ S and an STEL of 15ppm.				
Sulfur Dioxide 1000	SO ₂	2.21	2	5 ppm
Chlorine	CL ₂	2.45	1	
Carbon Monoxide 1000	CO	0.97	35	200/1 Hour
Carbon Dioxide 10%	CO ₂	1.52	5000	5%
Methane	CH ₄	0.55	90000	

¹ **Air = 1.0**

² **Permissible** - Concentration at which is believed that all workers may repeatedly be exposed, day after day, without adverse effect.

³ **STEL** - Short Term Exposure Limit. A 15-minute time weighted average.

⁴ **Lethal** - Concentration that will cause death with short-term exposure.

TLV – Threshold Limit Value; a concentration recommended by the American Conference of Governmental Industrial Hygienists (ACGIH)

TWA – Time Weighted Average; the average concentration of contaminant one can be exposed to over a given eight-hour period.

ACGIH – (American Conference of Governmental Industrial Hygienists) is an organization comprised of Occupational Health Professionals believed by many to be the top experts in the field of Industrial Hygiene. They are recognized as an expert resource by OSHA. The ACGIH releases a bi-annual publication "Threshold Limit Values and Biological Indices" that many safety professionals consider to be the authoritative document on airborne contaminants.

Reference: API RP-49, September 1974 - Reissued August 1978

VI. PROPERTIES OF GASES

A. CARBON DIOXIDE

1. Carbon Dioxide (CO₂) is usually considered inert and is commonly used to extinguish fires. It is 1.52 times heavier than air and will concentrate in low areas of still air. Humans cannot breathe air containing more than 10% CO₂ without losing conscience or becoming disorientation in a few minutes. Continued exposure to CO₂ after being affected will cause convulsions, coma, and respiratory failure.
2. The threshold limit of CO₂ is 5000 ppm. Short-term exposure to 50,000 ppm (5%) is reasonable. This gas is colorless, odorless, and can be tolerated in relatively high concentrations.

B. HYDROGEN SULFIDE

1. Hydrogen Sulfide (H₂S) is a colorless, transparent, flammable gas. It is heavier than air and, hence, may accumulate in low places.
2. Although the slightest presence of H₂S in the air is normally detectable by its characteristic "rotten egg" odor, it is dangerous to rely on the odor as a means of detecting excessive concentrations because the sense of smell is rapidly lost, allowing lethal concentrations to be accumulated without warning. The following table indicates the poisonous nature of H₂S.

CONCENTRATION			EFFECTS
% H ₂ S	PPM	GR/100 SCF ¹	
0.001	10	.65	Safe for 8 hours without respirator. Obvious and unpleasant odor.
0.0015	15	0.975	Safe for 15 minutes of exposure without respirator.
0.01	100	6.48	Kills smell in 3-15 minutes; may sting eyes and throat.
0.02	200	12.96	Kills smell quickly; stings eyes and throat.
0.05	500	32.96	Dizziness; breathing ceases in a few minutes; need prompt artificial respiration.
0.07	700	45.92	Rapid Unconsciousness; death will result if not rescued promptly.
0.1	1000	64.80	Instant unconsciousness, followed by death within minutes.

¹ Grains per 100 Cubic Feet**VII. Treatment Procedures for Hydrogen Sulfide Poisoning**

- A. Remove the victim to fresh air.
- B. If breathing has ceased or is labored, begin resuscitation immediately.
Note: This is the quickest and preferred method of clearing victim's lungs of contaminated air; however, under disaster conditions, it may not be practical to move the victim to fresh air. In such instances, where those rendering first aid must continue to wear masks, a resuscitator should be used.
- C. Apply resuscitator to help purge H₂S from the blood stream.
- D. Keep the victim at rest and prevent chilling.
- E. Get victim under physician's care as soon as possible.

C. SULPHUR DIOXIDE

- 1. Sulfur Dioxide (SO₂) is a colorless, non-flammable, transparent gas.
- 2. SO₂ is produced during the burning of H₂S. Although SO₂ is heavier than air, it can be picked up by a breeze and carried downwind at elevated temperatures. Since SO₂ is extremely irritating to the eyes and mucous membranes of the upper respiratory tract, it has exceptionally good warning powers in this respect. The following table indicates the toxic nature of SO₂:

CONCENTRATION		EFFECTS
% SO ₂	PPM	
0.0005	3 to 5	Pungent odor, normally a person can detect SO ₂ in this range.
0.0012	12	Throat irritation, coughing, constriction of the chest, tearing and smarting of eyes.
0.015	150	So irritating that it can only be endured for a few minutes.
.05	500	Causes a sense of suffocation, event with the

		first breath.
--	--	---------------

VIII. BREATHING AIR EQUIPMENT DRILLS FOR ON & OFF DUTY PERSONNEL

An H₂S Drill and Training Session must be given once a week to ALL on-duty personnel with off duty personnel. On-duty and Off-duty personnel will reverse roles on alternate drills.

An H₂S drill and training session must be given once a week to all off-duty personnel in coincidence with on-duty personnel reversing roles on alternate drills.

The purpose of this drill is to instruct the crews in the operation and use of breathing air and H₂S related emergency equipment and to allow the personnel to become acquainted with using the equipment under working conditions. The crews should be trained to put on the breathing air equipment within one minute when required or requested to do so.

The following procedure should be used for weekly drills. The MRC supervisor must be satisfied that the crews are proficient with the equipment.

1. All personnel should be informed that a drill will be held.
2. The Total H₂S Safety Technician or a designee assigned by the MRC Drilling Foreman should initiate the drill by signaling as he/she would if H₂S was detected.
3. Personnel should don their breathing apparatus.
4. Once the breathing air equipment is on, the H₂S Technician should check all personnel to insure proper operation.

A training and information session will be conducted after each drill to answer any H₂S related questions and to cover any gaps identified from one of the following topics:

- Condition II, and III alerts and steps to be taken by all personnel.
- The importance of wind direction when dealing with H₂S.
- Proper use and storage of all types of breathing equipment.
- Proper use and storage of oxygen resuscitators.
- Proper use and storage of H₂S detectors (Mini Checks or equivalent).
- The "buddy system" and the procedure for rescuing a person overcome by H₂S.
- Responsibilities and duties.
- Location of H₂S safety equipment.
- Other parts of the "H₂S Contingency Plan" that should be reviewed.

NOTE: A record of attendance must be kept for weekly drills and training sessions.

IX. HYDROGEN SULFIDE TRAINING CURRICULUM

(FOR EMPLOYERS, VISITORS, AND CONTRACTORS)

EACH PERSON WILL BE INFORMED ON THE RESTRICTIONS OF HAVING BEARDS AND CONTACT LENS. THEY WILL ALSO BE INFORMED OF THE AVAILABILITY OF SPECTACLE KITS.

AFTER THE H2S EQUIPMENT IS RIGGED UP, ALL IN SCOPE PERSONNEL WILL BE H2S TRAINED AND PUT THROUGH A DRILL. ANY DEFICIENCIES WILL BE CORRECTED.

Training Completion cards are good for one year and will indicate date of completion or expiration. Personnel previously trained on another facility and visiting, must attend a "supplemental briefing" on H2S equipment and procedures before beginning duty. Visitors who remain on the location more than 24 hours must receive full H2S training given all crew members. A "supplemental briefing" will include but not be limited to: Location of respirators, familiarization with safe briefing areas, alarms with instruction on responsibilities in the event of a release and hazards of H2S and (SO2, if applicable). A training and drill log will be kept.

Topics for full H2S training shall include the following equipment if on location, but not be limited to the following:

1. **Brief Introduction on H2S**
 - A. Slide or Computer presentation (If Available)
 - B. H2S material will be distributed
 - C. Re-emphasize the properties, toxicity, and hazards of H2S
 - D. Source of SO2 (if applicable)
2. **H2S Detection**
 - A. Description of H2S sensors
 - B. Description of warning system (how it works & it's location)
 - C. Actual location of H2S sensors
 - D. Instruction on use of pump type detector (Gastec)
 - E. Use of card detectors, ampoules, or dosimeters
 - F. Use of combustible gas detector
 - G. Other personnel detectors used
 - H. Alarm conditions I & II,
 - I. SO2 alarms (if applicable)

3. **H2S Protection**

- A. Types of breathing apparatus provided (30-minute SCBA & 5-minute SCBA (with voice diaphragms for communication if supplied)
- B. Principle of how breathing apparatus works
- C. Demonstration on how to use breathing apparatus
- D. Location of breathing apparatus

4. **Cascade System**

- A. Description of cascade system
- B. How system works
- C. Cascade location of rig with reference to briefing areas
- D. How to use cascade system (with 5-minute hose work line units & refill, if supplied)
- E. Importance of wind direction and actual location of Windssocks
- F. Purpose of compressor/function (if one is on site)

5. **H2S Rescue and First Aid**

- A. Importance of wind direction
- B. Safe briefing area
- C. Buddy system
- D. H2S symptoms
- E. Methods of rescue

6. **Hands on Training**

- A. Donning/familiarization of SCBA 30-minute unit
- B. Donning/familiarization of SKADA 5- MIN. Packs
- C. Familiarization of cascades
- D. Use of O2 resuscitator
- E. Alarm conditions - upwind briefing areas, etc...
- F. Duties and responsibilities of all personnel
- G. Procedures for evacuation
- H. Search and Rescue teams

7. **Certification**

- A. Testing on material covered

TOTAL SAFETY US INC., FIT TEST

X. EMPLOYEE INFORMATION

Employee Name: _____ Date: _____

Date of Employee Medical Evaluation: _____

Medical Status (circle): Unrestricted Limitations on Use Use Not
Authorized

RESPIRATOR INFORMATION

Respirator Type (Dustmask, SCBA, etc): _____

Brand: _____

Size: (circle): XS S M L XL

FIT TEST INFORMATION

Type of Fit Test Performed:

Quantitative

Porta Count
Fittester 3000

Fit Factor: _____
Fit Factor: _____

Qualitative

Irritant Smoke
Isoamyl Acetate (Banana Oil)
Saccharin
Bitrex

Passed / Failed
Passed / Failed
Passed / Failed
Passed / Failed

I hereby certify that this fittest was conducted in accordance with the OSHA Fit Testing Protocols found in Appendix A of 1910.134.

Fit Tester Name (Print): _____

Signature: _____ Date: _____

XI. H₂S SAFETY SERVICES

HYDROGEN SULFIDE SAFETY PACKAGE – Contained on location in Total Safety H₂S Equipment Trailer, unless otherwise noted:

RESPIRATORY SAFETY SYSTEMS

QTY	DESCRIPTION
------------	--------------------

- | | |
|----|---|
| 12 | 30-Minute Pressure Demand SCBA
(4-Primary Safe Briefing Area, 4-Secondary Safe Briefing Area, 4-floor with one of these for derrick man) |
| 9 | Hose Line 5-minute Work Unit w/Escapes Cylinder (1 in derrick, 6 on drill floor, 1 in mud pit wt area, 1 in shaker area) |

The following shall be part of the package if requested by the MRC Foremen (at least one trailer with cascade system is required to be located in the MRC Magnolia asset for use as needed)

- | | |
|-----|---|
| 1 | Breathing air cascade of 10 bottles w/regulator |
| 2 | Refill lines to refill 30-minute units on location |
| 1 | 6-Man manifold that can be rigged up to work area on floor, if needed |
| 6 | 25 foot hose lines |
| 2 | 50 foot hose lines |
| 100 | Feet of hose line to rig cascade up to 12 man manifold on floor |
| 12 | 30-minute Self Contained Breathing apparatus |

DETECTION AND ALARM SAFETY SYSTEM

- | | |
|---|---|
| 1 | H ₂ S Fixed Monitor w/8Channels (Loc determined at rig up) suggested.
(Mud pit area, shaker area, bell nipple area, floor/driller area, & outside quarters) |
| 5 | H ₂ S Sensors |
| 3 | Explosion Proof Alarms (Light and Siren)
(1 on floor, 1 in work area, 1 in trailer area where quarters are located) |
| 2 | Personal H ₂ S monitors |
| 1 | Portable Tri-Gas Hand Held Meter (O ₂ , LEL, H ₂ S) |
| 1 | Sensidyne/Gastech Manual Pump Type Detector |
| 8 | Boxes H ₂ S Tubes Various Ranges |
| 2 | Boxes SO ₂ Tubes Various Ranges |
| 1 | Calibration Gas |
| 1 | Set Paper Work for Records: Training, Cal, Inspection, other |

ADDITIONAL SAFETY RELATED EQUIPMENT

QTY DESCRIPTION

- 2 Windsocks with Pole and Bracket
- 1 Set Well Condition Sign w/Green, Yellow, Red Flags
- 1 Primary Safe Briefing Area Sign
- 1 Secondary Safe Briefing Area Sign
- 6 Operating Condition Signs for Work Areas & Living Quarters

**TRAILER WITH BREATHING AIR CASCADE WILL
ALSO INCLUDE THE FOLLOWING:**

This equipment will be part of the H2S equipment stored in the trailer, when on location

- 1 First aid kit
- 1 Fire Blanket
- 1 Eye wash station
- 2 Safety Harness w/150' safety line

XII. EMERGENCY PHONE NUMBERS (Updated March 18, 2009)**EMERGENCY PHONE NUMBERS**

MRC Energy Co. Emergency Phone #

MRC Energy Co. Permian Operations Phone-----

MRC Energy Co. Production

113 Daw Rd

Mansfield LA 71052

Title	Names	Phone	Cell
Operations Manager			
Operation Supt.			
Operations Supervisor			
Operations Supervisor			
Office Supervisor			
HSE			
Scheduler Planner			

Hydrogen Sulfide Safety Consultants

Total Safety W. Bender Blvd. Hobbs, NM	575-392-2973	After Hours 24 Hour Call Center Through Office Number
Tommy Throckmorton Operations Manager	575-392-2973	940-268-9614
Rodney Jourdan Sales Contact	575-392-2973	432-349-3928

**MRC Energy Co. MEDICAL RESPONSE PLAN AND IT'S MEDICAL
PROTOCOLS WILL BE FOLLOWED**

MEDICAL COORDINATOR # -----

Emergency Numbers & Directions

Hospitals (911)

Artesia General Hospital 702 N. 13th St. Artesia, NM 88210	Main Phone Number	575-748-3333
Nor-Lea General Hospital 1600 N. Main Ave. Lovington, NM 88260	Main Phone Number	575-396-6611
Lea Regional Medical Center 5419 N. Lovington Hwy Hobbs, NM 88240	Main Phone Number	575-492-5260
Carlsbad General Hospital 2430 W. Pierce St. Carlsbad, NM	Main Phone Number	575-887-4100
Lovelace Regional Hospital 117 E. 19th St Roswell, NM 88201	Main Phone Number	575-627-7000
Winkler Co. Memorial Hospital 821 Jeffee Dr. Kermit, Texas 79745	Main Phone Number	432-586-8299
Reeves County Hospital 2323 Texas St. Pecos, Texas 79772	Main Phone Number	432-447-3551

State Police (911)

Texas DPS Loving co. 225 N.Pecos Mentone, Texas 79754	Office Number	432-377-2411
Texas DPS Winkler Co. 100 E Winkler Kermit, Texas 79745	Office Number	432-586-3465
Texas DPS Pecos Co. 148 N I-20 Frontage RD Pecos, Texas 79772	Office Number	432-447-3532
New Mexico State Police 3300 W. Main St Artesia, NM	Office Number	575-748-9718
New Mexico State Police 304 N. Canyon St Carlsbad, NM 88220	Office Number	575-885-3137
New Mexico State Police 5100 Jack Gomez Blvd. Hobbs, NM 88240	Office Number	575-392-5588

Local Law Enforcement (911) (Sheriff)

Reeves Co. Sheriff 500 N. Oak ST Pecos, Texas 79722	Office Number	432-445-4901
Winkler Co. Sheriff 1300 Bellaire St. Kermit, Texas 79745	Office Number	432-586-3461
Loving Co. Sheriff Courthouse Mentone, Texas	Office Number	432-377-2411
Lea Co. Sheriff 1417 S. Commercial St. Lovington, NM 88260	Office Number	
Eddy Co. Sheriff 305 N 7th St. Artesia, NM 88210	Office Number	575-766-9888
Eddy Co. Sheriff 305 N 7th St. Carlsbad, NM 88220	Office Number	575-746-9888

Federal & State Agencies

OSHA Lubbock Area Office 1205 Texas Av. Room 806 Lubbock, Texas 79401	Main Number	806-472-7681 EXT 7685
New Mexico Environment Department 400 N Pennsylvania Roswell, NM 88201	Joe Fresquez	575-623-3935
Texas Railroad Commission Midland, Texas	Main Number	844-773-0305
BLM Carlsbad, NM Field Office 620 E. Green ST Carlsbad, NM 88220	Main Number	575-234-5972
BLM Hobbs Field Station 414 W. Taylor Rd. Hobbs, NM 88240	Main Number	575-393-3612
BLM Roswell District Office 2909 W. Second St. Roswell, NM 88201	Main Number	575-627-0272
TECQ Texas Commission on Environmental Quality	Main Number	800-832-8224
New Mexico OCD		
U.S. Environmental Protection Agency Region 6 Texas/New Mexico	Main Number	214-655-2222
National Response Center Toxic Chemicals & Oil Spills	Main Number	800-424-8802

Rig Company

XIII. EVACUATION OF THE GENERAL PUBLIC

The procedure to be used in alerting nearby persons in the event of any occurrence that could pose a threat to life or property will be arranged and completed with public officials in detail, prior to drilling into the hydrogen sulfide formations.

In the event of an actual emergency, the following steps will be immediately taken:

1. The MRC Energy Co.'s representative will dispatch sufficient personnel to immediately warn each resident and transients down-wind within radius of exposure from the well site. Then warn all residence in the radius of exposure. Additional evacuation zones may be necessary as the situation warrants.
2. The MRC Energy Co.'s representative will immediately notify proper authorities, including the Sheriff's Office, Highway Patrol, and any other public officials as described above and will enlist their assistance in warning residents and transients in the calculated radius of exposure.
3. The MRC Energy Co.'s representative will dispatch sufficient personnel to divert traffic in the vicinity away from the potentially dangerous area. A guard to the entrance of the well site will be posted to monitor essential and non essential traffic.
4. General:
 - A. The area included within the radius of exposure is considered to be the zone of maximum potential hazard from a hydrogen sulfide gas escape. Immediate evacuation of public areas, in accordance with the provisions of this contingency plan, is imperative. When it is determined that conditions exist which create an additional area (beyond the initial zone of maximum potential hazard) vulnerable to possible hazard, public areas in the additional hazardous area will be evacuated in accordance with the contingency plan.
 - B. In the event of a disaster, after the public areas have been evacuated and traffic stopped, it is expected that local civil authorities will have arrived and within a few hours will have assumed direction of and control of the public, including all public areas. MRC Energy Co. will cooperate with these authorities to the fullest extent and will exert every effort by careful advice to such authorities to prevent panic or rumors.
 - C. MRC Energy Co. will dispatch appropriate management personnel at the disaster site as soon as possible. The company's personnel

will cooperate with and provide such information to civil authorities as they might require.

- D. One of the products of the combustion of hydrogen sulfide is sulfur dioxide (SO_2). Under certain conditions this gas may be equally as dangerous as H_2S . A pump type detector device, which determines the percent of SO_2 in air through concentrations in ppm, will be available. Although normal air movement is sufficient to dissipate this material to safe levels, the SO_2 detector should be utilized to check concentrations in the proximity of the well once every hour, or as necessary and the situation warrants. Also, if any low areas are suspected of having high concentrations, personnel should be made aware of these areas, and steps should be taken to determine whether or not these low areas are hazardous.



Matador Resources

Lea County, New Mexico (NAD 27)

Charles Ling Fed Com

Charles Ling Fed Com #134H

Wellbore #1

Plan: Design #1

Standard Planning Report

07 May, 2018





MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Company:	Matador Resources	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Lea County, New Mexico (NAD 27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Well	Charles Ling Fed Com #134H					
Well Position	+N/-S	65.09 usft	Northing:	451,347.35 usft	Latitude:	32° 14' 18.091 N
	+E/-W	3,946.64 usft	Easting:	746,371.70 usft	Longitude:	103° 32' 11.455 W
Position Uncertainty		0.00 usft	Wellhead Elevation:		Ground Level:	3,625.00 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2018	5/7/2018	6.91	60.04	47,899

Design	Design #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.56

Plan Survey Tool Program		Date 5/7/2018			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	16,740.68	Design #1 (Wellbore #1)	MWD	
				OWSG MWD - Standard	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,000.15	4.00	344.39	999.83	13.45	-3.76	1.00	1.00	0.00	344.39	
4,818.08	4.00	344.39	4,808.45	270.06	-75.44	0.00	0.00	0.00	0.00	
5,084.85	0.00	0.00	5,075.00	279.02	-77.95	1.50	-1.50	0.00	180.00	VP - Charles Ling F
11,400.89	0.00	0.00	11,391.04	279.02	-77.95	0.00	0.00	0.00	0.00	
12,300.89	90.00	191.22	11,964.00	-282.98	-189.43	10.00	10.00	0.00	191.22	
12,883.71	90.00	179.56	11,964.00	-862.22	-244.10	2.00	0.00	-2.00	-90.00	
16,740.74	90.00	179.56	11,964.00	-4,719.14	-214.73	0.00	0.00	0.00	0.00	PBHL - Charles Lin



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Company:	Matador Resources	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, 1.00°/100' Build									
700.00	1.00	344.39	699.99	0.84	-0.23	-0.84	1.00	1.00	0.00
800.00	2.00	344.39	799.96	3.36	-0.94	-3.37	1.00	1.00	0.00
900.00	3.00	344.39	899.86	7.56	-2.11	-7.58	1.00	1.00	0.00
1,000.15	4.00	344.39	999.83	13.45	-3.76	-13.48	1.00	1.00	0.00
Begin 4.00° Tangent									
1,100.00	4.00	344.39	1,099.43	20.16	-5.63	-20.21	0.00	0.00	0.00
1,200.00	4.00	344.39	1,199.19	26.88	-7.51	-26.94	0.00	0.00	0.00
1,300.00	4.00	344.39	1,298.94	33.61	-9.39	-33.68	0.00	0.00	0.00
1,337.65	4.00	344.39	1,336.50	36.14	-10.09	-36.21	0.00	0.00	0.00
Z (Rustler)									
1,350.00	4.00	344.39	1,348.82	36.97	-10.33	-37.04	0.00	0.00	0.00
13 3/8"									
1,400.00	4.00	344.39	1,398.70	40.33	-11.27	-40.41	0.00	0.00	0.00
1,500.00	4.00	344.39	1,498.46	47.05	-13.14	-47.15	0.00	0.00	0.00
1,600.00	4.00	344.39	1,598.21	53.77	-15.02	-53.88	0.00	0.00	0.00
1,700.00	4.00	344.39	1,697.97	60.49	-16.90	-60.62	0.00	0.00	0.00
1,800.00	4.00	344.39	1,797.72	67.21	-18.78	-67.35	0.00	0.00	0.00
1,865.94	4.00	344.39	1,863.50	71.64	-20.01	-71.79	0.00	0.00	0.00
Z (Salado) (Top Salt)									
1,900.00	4.00	344.39	1,897.48	73.93	-20.65	-74.09	0.00	0.00	0.00
2,000.00	4.00	344.39	1,997.24	80.65	-22.53	-80.82	0.00	0.00	0.00
2,100.00	4.00	344.39	2,096.99	87.37	-24.41	-87.56	0.00	0.00	0.00
2,200.00	4.00	344.39	2,196.75	94.09	-26.29	-94.29	0.00	0.00	0.00
2,300.00	4.00	344.39	2,296.51	100.82	-28.16	-101.03	0.00	0.00	0.00
2,400.00	4.00	344.39	2,396.26	107.54	-30.04	-107.76	0.00	0.00	0.00
2,500.00	4.00	344.39	2,496.02	114.26	-31.92	-114.50	0.00	0.00	0.00
2,600.00	4.00	344.39	2,595.77	120.98	-33.80	-121.23	0.00	0.00	0.00
2,700.00	4.00	344.39	2,695.53	127.70	-35.67	-127.97	0.00	0.00	0.00
2,800.00	4.00	344.39	2,795.29	134.42	-37.55	-134.70	0.00	0.00	0.00
2,900.00	4.00	344.39	2,895.04	141.14	-39.43	-141.44	0.00	0.00	0.00
3,000.00	4.00	344.39	2,994.80	147.86	-41.31	-148.18	0.00	0.00	0.00
3,100.00	4.00	344.39	3,094.56	154.58	-43.18	-154.91	0.00	0.00	0.00
3,200.00	4.00	344.39	3,194.31	161.30	-45.06	-161.65	0.00	0.00	0.00
3,300.00	4.00	344.39	3,294.07	168.03	-46.94	-168.38	0.00	0.00	0.00
3,400.00	4.00	344.39	3,393.82	174.75	-48.82	-175.12	0.00	0.00	0.00
3,500.00	4.00	344.39	3,493.58	181.47	-50.69	-181.85	0.00	0.00	0.00
3,600.00	4.00	344.39	3,593.34	188.19	-52.57	-188.59	0.00	0.00	0.00
3,700.00	4.00	344.39	3,693.09	194.91	-54.45	-195.32	0.00	0.00	0.00
3,745.52	4.00	344.39	3,738.50	197.97	-55.30	-198.39	0.00	0.00	0.00
Z (Castile (T))									
3,800.00	4.00	344.39	3,792.85	201.63	-56.33	-202.06	0.00	0.00	0.00
3,900.00	4.00	344.39	3,892.61	208.35	-58.20	-208.79	0.00	0.00	0.00
4,000.00	4.00	344.39	3,992.36	215.07	-60.08	-215.53	0.00	0.00	0.00
4,100.00	4.00	344.39	4,092.12	221.79	-61.96	-222.26	0.00	0.00	0.00
4,200.00	4.00	344.39	4,191.87	228.51	-63.84	-229.00	0.00	0.00	0.00



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Company:	Matador Resources	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
4,300.00	4.00	344.39	4,291.63	235.24	-65.71	-235.73	0.00	0.00	0.00	
4,400.00	4.00	344.39	4,391.39	241.96	-67.59	-242.47	0.00	0.00	0.00	
4,500.00	4.00	344.39	4,491.14	248.68	-69.47	-249.20	0.00	0.00	0.00	
4,600.00	4.00	344.39	4,590.90	255.40	-71.35	-255.94	0.00	0.00	0.00	
4,700.00	4.00	344.39	4,690.66	262.12	-73.22	-262.67	0.00	0.00	0.00	
4,800.00	4.00	344.39	4,790.41	268.84	-75.10	-269.41	0.00	0.00	0.00	
4,818.08	4.00	344.39	4,808.45	270.06	-75.44	-270.63	0.00	0.00	0.00	
Begin 1.50°/100' Drop										
4,900.00	2.77	344.39	4,890.22	274.72	-76.74	-275.30	1.50	-1.50	0.00	
5,000.00	1.27	344.39	4,990.16	278.12	-77.69	-278.70	1.50	-1.50	0.00	
5,084.85	0.00	0.00	5,075.00	279.02	-77.95	-279.61	1.50	-1.50	0.00	
Begin Vertical Hold - VP - Charles Ling Fed Com #134H										
5,100.00	0.00	0.00	5,090.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
5,200.00	0.00	0.00	5,190.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
5,227.35	0.00	0.00	5,217.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (G30:CS14-CSB) (Base Salt)										
5,279.35	0.00	0.00	5,269.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (G26: Bell Cyn.)										
5,300.00	0.00	0.00	5,290.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9 5/8"										
5,400.00	0.00	0.00	5,390.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
5,500.00	0.00	0.00	5,490.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
5,600.00	0.00	0.00	5,590.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
5,700.00	0.00	0.00	5,690.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
5,800.00	0.00	0.00	5,790.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
5,900.00	0.00	0.00	5,890.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,000.00	0.00	0.00	5,990.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,100.00	0.00	0.00	6,090.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,200.00	0.00	0.00	6,190.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,300.00	0.00	0.00	6,290.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,356.35	0.00	0.00	6,346.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (G13: Cherry Cyn.)										
6,400.00	0.00	0.00	6,390.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,500.00	0.00	0.00	6,490.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,600.00	0.00	0.00	6,590.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,700.00	0.00	0.00	6,690.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,800.00	0.00	0.00	6,790.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
6,900.00	0.00	0.00	6,890.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,000.00	0.00	0.00	6,990.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,100.00	0.00	0.00	7,090.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,200.00	0.00	0.00	7,190.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,300.00	0.00	0.00	7,290.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,400.00	0.00	0.00	7,390.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,496.35	0.00	0.00	7,486.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (G7: Brushy Cyn.) Antelope Ridge										
7,500.00	0.00	0.00	7,490.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,600.00	0.00	0.00	7,590.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,700.00	0.00	0.00	7,690.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,800.00	0.00	0.00	7,790.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
7,900.00	0.00	0.00	7,890.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,000.00	0.00	0.00	7,990.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,100.00	0.00	0.00	8,090.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,200.00	0.00	0.00	8,190.15	279.02	-77.95	-279.61	0.00	0.00	0.00	



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Company:	Matador Resources	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
8,300.00	0.00	0.00	8,290.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,400.00	0.00	0.00	8,390.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,500.00	0.00	0.00	8,490.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,600.00	0.00	0.00	8,590.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,700.00	0.00	0.00	8,690.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,800.00	0.00	0.00	8,790.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
8,900.00	0.00	0.00	8,890.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,000.00	0.00	0.00	8,990.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,034.35	0.00	0.00	9,024.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (G4: BSG) (CS9))										
9,100.00	0.00	0.00	9,090.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,200.00	0.00	0.00	9,190.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,300.00	0.00	0.00	9,290.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,400.00	0.00	0.00	9,390.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,500.00	0.00	0.00	9,490.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,600.00	0.00	0.00	9,590.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,700.00	0.00	0.00	9,690.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,800.00	0.00	0.00	9,790.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
9,832.35	0.00	0.00	9,822.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (L5.3: FBSC)										
9,900.00	0.00	0.00	9,890.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,000.00	0.00	0.00	9,990.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,041.35	0.00	0.00	10,031.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (L5.1: FBSC)										
10,100.00	0.00	0.00	10,090.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,200.00	0.00	0.00	10,190.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,300.00	0.00	0.00	10,290.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,400.00	0.00	0.00	10,390.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,461.35	0.00	0.00	10,451.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (L4.3: SBSC)										
10,500.00	0.00	0.00	10,490.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,600.00	0.00	0.00	10,590.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,700.00	0.00	0.00	10,690.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,751.35	0.00	0.00	10,741.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (L4.1: SBSC)										
10,800.00	0.00	0.00	10,790.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
10,900.00	0.00	0.00	10,890.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
11,000.00	0.00	0.00	10,990.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
11,100.00	0.00	0.00	11,090.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
11,200.00	0.00	0.00	11,190.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
11,277.35	0.00	0.00	11,267.50	279.02	-77.95	-279.61	0.00	0.00	0.00	
Z (L3.3: TBSC)										
11,300.00	0.00	0.00	11,290.15	279.02	-77.95	-279.61	0.00	0.00	0.00	
11,400.89	0.00	0.00	11,391.04	279.02	-77.95	-279.61	0.00	0.00	0.00	
Begin 10.00°/100' Build										
11,450.00	4.91	191.22	11,440.09	276.96	-78.36	-277.55	10.00	10.00	0.00	
11,500.00	9.91	191.22	11,489.66	270.64	-79.61	-271.24	10.00	10.00	0.00	
11,550.00	14.91	191.22	11,538.47	260.10	-81.70	-260.72	10.00	10.00	0.00	
11,600.00	19.91	191.22	11,586.17	245.43	-84.61	-246.07	10.00	10.00	0.00	
11,650.00	24.91	191.22	11,632.38	226.74	-88.32	-227.41	10.00	10.00	0.00	
11,700.00	29.91	191.22	11,676.75	204.16	-92.80	-204.87	10.00	10.00	0.00	
11,750.00	34.91	191.22	11,718.95	177.89	-98.01	-178.63	10.00	10.00	0.00	
11,800.00	39.91	191.22	11,758.65	148.10	-103.92	-148.89	10.00	10.00	0.00	



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Company:	Matador Resources	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,850.00	44.91	191.22	11,795.55	115.03	-110.48	-115.88	10.00	10.00	0.00
11,900.00	49.91	191.22	11,829.38	78.94	-117.64	-79.84	10.00	10.00	0.00
11,925.73	52.48	191.22	11,845.50	59.27	-121.54	-60.20	10.00	10.00	0.00
Z (L3.1: TBSG)									
11,950.00	54.91	191.22	11,859.87	40.09	-125.34	-41.05	10.00	10.00	0.00
12,000.00	59.91	191.22	11,886.79	-1.22	-133.54	0.20	10.00	10.00	0.00
12,050.00	64.91	191.22	11,909.94	-44.68	-142.16	43.59	10.00	10.00	0.00
12,100.00	69.91	191.22	11,929.14	-89.95	-151.14	88.78	10.00	10.00	0.00
12,150.00	74.91	191.22	11,944.24	-136.68	-160.41	135.45	10.00	10.00	0.00
12,200.00	79.91	191.22	11,955.14	-184.53	-169.90	183.22	10.00	10.00	0.00
12,250.00	84.91	191.22	11,961.74	-233.13	-179.54	231.75	10.00	10.00	0.00
12,300.89	90.00	191.22	11,964.00	-282.98	-189.43	281.52	10.00	10.00	0.00
Begin 90.00° Lateral; Begin 2.00°/100° Turn									
12,400.00	90.00	189.24	11,964.00	-380.51	-207.03	378.91	2.00	0.00	-2.00
12,500.00	90.00	187.24	11,964.00	-479.48	-221.36	477.76	2.00	0.00	-2.00
12,600.00	90.00	185.24	11,964.00	-578.88	-232.22	577.08	2.00	0.00	-2.00
12,700.00	90.00	183.24	11,964.00	-678.60	-239.61	676.74	2.00	0.00	-2.00
12,800.00	90.00	181.24	11,964.00	-778.52	-243.52	776.63	2.00	0.00	-2.00
12,883.71	90.00	179.56	11,964.00	-862.22	-244.10	860.32	2.00	0.00	-2.00
Hold 179.56° Azm									
12,900.00	90.00	179.56	11,964.00	-878.51	-243.98	876.61	0.00	0.00	0.00
13,000.00	90.00	179.56	11,964.00	-978.51	-243.22	976.61	0.00	0.00	0.00
13,100.00	90.00	179.56	11,964.00	-1,078.51	-242.45	1,076.61	0.00	0.00	0.00
13,200.00	90.00	179.56	11,964.00	-1,178.51	-241.69	1,176.61	0.00	0.00	0.00
13,300.00	90.00	179.56	11,964.00	-1,278.50	-240.93	1,276.61	0.00	0.00	0.00
13,400.00	90.00	179.56	11,964.00	-1,378.50	-240.17	1,376.61	0.00	0.00	0.00
13,500.00	90.00	179.56	11,964.00	-1,478.50	-239.41	1,476.61	0.00	0.00	0.00
13,600.00	90.00	179.56	11,964.00	-1,578.49	-238.65	1,576.61	0.00	0.00	0.00
13,700.00	90.00	179.56	11,964.00	-1,678.49	-237.88	1,676.61	0.00	0.00	0.00
13,800.00	90.00	179.56	11,964.00	-1,778.49	-237.12	1,776.61	0.00	0.00	0.00
13,900.00	90.00	179.56	11,964.00	-1,878.49	-236.36	1,876.61	0.00	0.00	0.00
14,000.00	90.00	179.56	11,964.00	-1,978.48	-235.60	1,976.61	0.00	0.00	0.00
14,100.00	90.00	179.56	11,964.00	-2,078.48	-234.84	2,076.61	0.00	0.00	0.00
14,200.00	90.00	179.56	11,964.00	-2,178.48	-234.08	2,176.61	0.00	0.00	0.00
14,300.00	90.00	179.56	11,964.00	-2,278.47	-233.32	2,276.61	0.00	0.00	0.00
14,400.00	90.00	179.56	11,964.00	-2,378.47	-232.55	2,376.61	0.00	0.00	0.00
14,500.00	90.00	179.56	11,964.00	-2,478.47	-231.79	2,476.61	0.00	0.00	0.00
14,600.00	90.00	179.56	11,964.00	-2,578.46	-231.03	2,576.61	0.00	0.00	0.00
14,700.00	90.00	179.56	11,964.00	-2,678.46	-230.27	2,676.61	0.00	0.00	0.00
14,800.00	90.00	179.56	11,964.00	-2,778.46	-229.51	2,776.61	0.00	0.00	0.00
14,900.00	90.00	179.56	11,964.00	-2,878.46	-228.75	2,876.61	0.00	0.00	0.00
15,000.00	90.00	179.56	11,964.00	-2,978.45	-227.98	2,976.61	0.00	0.00	0.00
15,100.00	90.00	179.56	11,964.00	-3,078.45	-227.22	3,076.61	0.00	0.00	0.00
15,200.00	90.00	179.56	11,964.00	-3,178.45	-226.46	3,176.61	0.00	0.00	0.00
15,300.00	90.00	179.56	11,964.00	-3,278.44	-225.70	3,276.61	0.00	0.00	0.00
15,400.00	90.00	179.56	11,964.00	-3,378.44	-224.94	3,376.61	0.00	0.00	0.00
15,500.00	90.00	179.56	11,964.00	-3,478.44	-224.18	3,476.61	0.00	0.00	0.00
15,600.00	90.00	179.56	11,964.00	-3,578.44	-223.42	3,576.61	0.00	0.00	0.00
15,700.00	90.00	179.56	11,964.00	-3,678.43	-222.65	3,676.61	0.00	0.00	0.00
15,800.00	90.00	179.56	11,964.00	-3,778.43	-221.89	3,776.61	0.00	0.00	0.00
15,900.00	90.00	179.56	11,964.00	-3,878.43	-221.13	3,876.61	0.00	0.00	0.00
16,000.00	90.00	179.56	11,964.00	-3,978.42	-220.37	3,976.61	0.00	0.00	0.00
16,100.00	90.00	179.56	11,964.00	-4,078.42	-219.61	4,076.61	0.00	0.00	0.00



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Company:	Matador Resources	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,200.00	90.00	179.56	11,964.00	-4,178.42	-218.85	4,176.61	0.00	0.00	0.00
16,300.00	90.00	179.56	11,964.00	-4,278.42	-218.08	4,276.61	0.00	0.00	0.00
16,400.00	90.00	179.56	11,964.00	-4,378.41	-217.32	4,376.61	0.00	0.00	0.00
16,500.00	90.00	179.56	11,964.00	-4,478.41	-216.56	4,476.61	0.00	0.00	0.00
16,600.00	90.00	179.56	11,964.00	-4,578.41	-215.80	4,576.61	0.00	0.00	0.00
16,700.00	90.00	179.56	11,964.00	-4,678.40	-215.04	4,676.61	0.00	0.00	0.00
16,727.70	90.00	179.56	11,964.00	-4,706.10	-214.83	4,704.31	0.00	0.00	0.00
5 1/2"									
16,740.74	90.00	179.56	11,964.00	-4,719.14	-214.73	4,717.35	0.00	0.00	0.00
PBHL - PBHL - Charles Ling Fed Com #134H									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
VP - Charles Ling Fec	0.00	0.01	5,075.00	279.02	-77.95	451,626.37	746,293.76	32° 14' 20.858 N	103° 32' 12.338 W
- plan hits target center									
- Point									
PBHL - Charles Ling F	0.00	0.01	11,964.00	-4,719.14	-214.73	446,628.21	746,156.98	32° 13' 31.409 N	103° 32' 14.362 W
- plan hits target center									
- Point									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")	
1,350.00	1,348.82	13 3/8"	13-3/8	17-1/2	
5,300.00	5,290.15	9 5/8"	9-5/8	12-1/4	
16,727.70	11,964.00	5 1/2"	5-1/2	6	



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Company:	Matador Resources	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site:	Charles Ling Fed Com	North Reference:	Grid
Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,337.65	1,336.50	Z (Rustler)		0.00	179.56
1,865.94	1,863.50	Z (Salado) (Top Salt)		0.00	179.56
3,745.52	3,738.50	Z (Castile (T))		0.00	179.56
5,227.35	5,217.50	Z (G30:CS14-CSB) (Base Salt)		0.00	179.56
5,279.35	5,269.50	Z (G26: Bell Cyn.)		0.00	179.56
6,356.35	6,346.50	Z (G13: Cherry Cyn.)		0.00	179.56
7,496.35	7,486.50	Z (G7: Brushy Cyn.) Antelope Ridge		0.00	179.56
9,034.35	9,024.50	Z (G4: BSGI (CS9))		0.00	179.56
9,832.35	9,822.50	Z (L5.3: FBSC)		0.00	179.56
10,041.35	10,031.50	Z (L5.1: FBSC)		0.00	179.56
10,461.35	10,451.50	Z (L4.3: SBSC)		0.00	179.56
10,751.35	10,741.50	Z (L4.1: SBSC)		0.00	179.56
11,277.35	11,267.50	Z (L3.3: TBSC)		0.00	179.56
11,925.73	11,845.50	Z (L3.1: TBSC)		0.00	179.56

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
600.00	600.00	0.00	0.00	KOP, 1.00°/100' Build	
1,000.15	999.83	13.45	-3.76	Begin 4.00° Tangent	
4,818.08	4,808.45	270.06	-75.44	Begin 1.50°/100' Drop	
5,084.85	5,075.00	279.02	-77.95	Begin Vertical Hold	
11,400.89	11,391.04	279.02	-77.95	Begin 10.00°/100' Build	
12,300.89	11,964.00	-282.98	-189.43	Begin 90.00° Lateral; Begin 2.00°/100' Turn	
12,883.71	11,964.00	-862.22	-244.10	Hold 179.56° Azm	
16,740.74	11,964.00	-4,719.14	-214.73	PBHL	



Matador Resources

Lea County, New Mexico (NAD 27)

Charles Ling Fed Com

Charles Ling Fed Com #134H

Wellbore #1

Design #1

Anticollision Report

07 May, 2018





MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Reference	Design #1		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	MD + Stations Interval 100.00usft	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 10,000.00 u	Error Surface:	Pedal Curve
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program		Date 5/7/2018		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	16,740.68	Design #1 (Wellbore #1)	MWD	OWSG MWD - Standard

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Charles Ling Fed Com						
Charles Ling Fed Com #133H - Wellbore #1 - Design #1	600.00	592.00	1,176.69	1,172.88	308.653	CC
Charles Ling Fed Com #133H - Wellbore #1 - Design #1	16,741.61	16,761.75	1,318.34	1,142.94	7.516	ES, SF
Charles Ling Fed Com #203H - Wellbore #1 - Design #1	16,740.19	16,929.41	691.10	520.48	4.050	CC
Charles Ling Fed Com #203H - Wellbore #1 - Design #1	16,741.61	16,929.44	691.10	520.46	4.050	ES, SF
Charles Ling Fed Com #204H - Wellbore #1 - Design #1	901.66	901.52	29.04	23.04	4.839	CC
Charles Ling Fed Com #204H - Wellbore #1 - Design #1	1,000.00	999.68	29.66	22.95	4.421	ES
Charles Ling Fed Com #204H - Wellbore #1 - Design #1	16,741.61	16,904.87	681.60	507.69	3.919	SF
Charles Ling Fed Com #213H - Wellbore #1 - Design #1	600.00	592.00	1,235.18	1,231.37	323.995	CC
Charles Ling Fed Com #213H - Wellbore #1 - Design #1	700.00	685.51	1,235.38	1,230.88	274.276	ES
Charles Ling Fed Com #213H - Wellbore #1 - Design #1	16,741.61	17,205.28	1,403.23	1,235.01	8.342	SF
Charles Ling Fed Com #214H - Wellbore #1 - Design #1	516.33	517.33	60.10	56.85	18.521	CC
Charles Ling Fed Com #214H - Wellbore #1 - Design #1	700.00	700.40	60.37	55.81	13.247	ES
Charles Ling Fed Com #214H - Wellbore #1 - Design #1	11,603.83	11,602.30	171.35	88.67	2.072	SF
Leo Thorsness 13-24S-33E AR						
#211H - Wellbore #1 - Surveys	16,741.61	11,810.00	1,410.95	1,280.86	10.846	CC, ES, SF
Roy Batty Federal COM						
Roy Batty Federal COM #3H - Wellbore #1 - Surveys	11,200.00	15,392.00	1,209.29	1,092.20	10.328	SF
Roy Batty Federal COM #3H - Wellbore #1 - Surveys	15,527.35	12,134.57	1,108.98	1,017.12	12.073	CC, ES
Roy Batty Federal COM #4H - Wellbore #1 - Surveys	10,939.36	15,556.00	527.76	414.57	4.663	CC, ES, SF
Tyrell Fee						
001H - Wellbore #1 - Surveys	16,741.61	10,921.00	1,321.50	1,242.32	16.690	CC, ES, SF

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #133H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	-103.62	-276.99	-1,143.63	1,176.72					
100.00	100.00	92.00	92.00	0.13	0.12	-103.62	-276.99	-1,143.63	1,176.69	1,176.45	0.25	4,782.233		
200.00	200.00	192.00	192.00	0.49	0.46	-103.62	-276.99	-1,143.63	1,176.69	1,175.75	0.94	1,245.741		
300.00	300.00	292.00	292.00	0.85	0.82	-103.62	-276.99	-1,143.63	1,176.69	1,175.03	1.66	708.205		
400.00	400.00	392.00	392.00	1.20	1.17	-103.62	-276.99	-1,143.63	1,176.69	1,174.31	2.38	494.729		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #133H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Semi Major Axis (usft)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
500.00	500.00	492.00	492.00	1.56	1.53	-103.62	-276.99	-1,143.63	1,176.69	1,173.60	3.10	380.142	
600.00	600.00	592.00	592.00	1.92	1.89	-103.62	-276.99	-1,143.63	1,176.69	1,172.88	3.81	308.653	CC
700.00	699.99	688.89	688.89	2.28	2.24	-103.62	-276.36	-1,143.90	1,176.78	1,172.27	4.52	260.533	
800.00	799.96	785.51	785.48	2.64	2.58	-103.64	-274.24	-1,144.82	1,177.10	1,171.88	5.22	225.513	
900.00	899.86	882.14	882.02	3.00	2.93	-103.66	-270.62	-1,146.39	1,177.65	1,171.72	5.92	198.781	
1,000.00	999.68	978.77	978.49	3.36	3.28	-103.69	-265.51	-1,148.60	1,178.42	1,171.78	6.63	177.660	
1,000.15	999.83	978.91	978.64	3.36	3.28	-103.69	-265.50	-1,148.61	1,178.42	1,171.78	6.63	177.631	
1,100.00	1,099.43	1,077.31	1,076.78	3.72	3.64	-103.69	-259.02	-1,151.41	1,179.39	1,172.04	7.35	160.383	
1,200.00	1,199.19	1,177.30	1,176.50	4.08	4.00	-103.68	-252.29	-1,154.33	1,180.40	1,172.32	8.08	146.023	
1,300.00	1,298.94	1,277.30	1,276.23	4.45	4.37	-103.67	-245.56	-1,157.24	1,181.41	1,172.59	8.82	133.999	
1,400.00	1,398.70	1,377.29	1,375.95	4.82	4.74	-103.66	-238.83	-1,160.16	1,182.41	1,172.86	9.55	123.792	
1,500.00	1,498.46	1,477.29	1,475.68	5.19	5.11	-103.65	-232.11	-1,163.07	1,183.42	1,173.13	10.29	115.024	
1,600.00	1,598.21	1,577.28	1,575.40	5.56	5.48	-103.63	-225.38	-1,165.99	1,184.43	1,173.40	11.03	107.415	
1,700.00	1,697.97	1,677.28	1,675.13	5.93	5.85	-103.62	-218.65	-1,168.90	1,185.43	1,173.67	11.77	100.750	
1,800.00	1,797.72	1,777.27	1,774.86	6.30	6.22	-103.61	-211.92	-1,171.82	1,186.44	1,173.93	12.51	94.867	
1,900.00	1,897.48	1,877.26	1,874.58	6.67	6.59	-103.60	-205.20	-1,174.73	1,187.45	1,174.20	13.25	89.636	
2,000.00	1,997.24	1,977.26	1,974.31	7.04	6.96	-103.58	-198.47	-1,177.65	1,188.45	1,174.47	13.99	84.956	
2,100.00	2,096.99	2,077.25	2,074.03	7.41	7.33	-103.57	-191.74	-1,180.56	1,189.46	1,174.73	14.73	80.744	
2,200.00	2,196.75	2,177.25	2,173.76	7.78	7.70	-103.56	-185.01	-1,183.48	1,190.47	1,174.99	15.47	76.933	
2,300.00	2,296.51	2,277.24	2,273.48	8.15	8.08	-103.55	-178.29	-1,186.39	1,191.48	1,175.26	16.22	73.470	
2,400.00	2,396.26	2,377.24	2,373.21	8.52	8.45	-103.54	-171.56	-1,189.31	1,192.48	1,175.52	16.96	70.309	
2,500.00	2,496.02	2,477.23	2,472.93	8.89	8.82	-103.52	-164.83	-1,192.22	1,193.49	1,175.79	17.70	67.412	
2,600.00	2,595.77	2,577.23	2,572.66	9.26	9.20	-103.51	-158.10	-1,195.13	1,194.50	1,176.05	18.45	64.748	
2,700.00	2,695.53	2,677.22	2,672.38	9.63	9.57	-103.50	-151.38	-1,198.05	1,195.50	1,176.31	19.19	62.289	
2,800.00	2,795.29	2,777.22	2,772.11	10.01	9.94	-103.49	-144.65	-1,200.96	1,196.51	1,176.57	19.94	60.014	
2,900.00	2,895.04	2,877.21	2,871.84	10.38	10.32	-103.48	-137.92	-1,203.88	1,197.52	1,176.84	20.68	57.902	
3,000.00	2,994.80	2,977.21	2,971.56	10.75	10.69	-103.46	-131.19	-1,206.79	1,198.53	1,177.10	21.43	55.936	
3,100.00	3,094.56	3,077.20	3,071.29	11.12	11.06	-103.45	-124.47	-1,209.71	1,199.53	1,177.36	22.17	54.102	
3,200.00	3,194.31	3,177.19	3,171.01	11.49	11.44	-103.44	-117.74	-1,212.62	1,200.54	1,177.62	22.92	52.387	
3,300.00	3,294.07	3,277.19	3,270.74	11.87	11.81	-103.43	-111.01	-1,215.54	1,201.55	1,177.89	23.66	50.779	
3,400.00	3,393.82	3,377.18	3,370.46	12.24	12.18	-103.42	-104.28	-1,218.45	1,202.56	1,178.15	24.41	49.270	
3,500.00	3,493.58	3,477.18	3,470.19	12.61	12.56	-103.41	-97.56	-1,221.37	1,203.56	1,178.41	25.15	47.850	
3,600.00	3,593.34	3,577.17	3,569.91	12.98	12.93	-103.39	-90.83	-1,224.28	1,204.57	1,178.67	25.90	46.511	
3,700.00	3,693.09	3,677.17	3,669.64	13.36	13.31	-103.38	-84.10	-1,227.20	1,205.58	1,178.94	26.64	45.247	
3,800.00	3,792.85	3,777.16	3,769.36	13.73	13.68	-103.37	-77.37	-1,230.11	1,206.59	1,179.20	27.39	44.052	
3,900.00	3,892.61	3,877.16	3,869.09	14.10	14.05	-103.36	-70.65	-1,233.03	1,207.59	1,179.46	28.14	42.920	
4,000.00	3,992.36	3,977.15	3,968.82	14.47	14.43	-103.35	-63.92	-1,235.94	1,208.60	1,179.72	28.88	41.847	
4,100.00	4,092.12	4,077.15	4,068.54	14.85	14.80	-103.34	-57.19	-1,238.85	1,209.61	1,179.98	29.63	40.827	
4,200.00	4,191.87	4,177.14	4,168.27	15.22	15.18	-103.32	-50.46	-1,241.77	1,210.62	1,180.25	30.37	39.858	
4,300.00	4,291.63	4,277.14	4,267.99	15.59	15.55	-103.31	-43.73	-1,244.68	1,211.63	1,180.51	31.12	38.935	
4,400.00	4,391.39	4,377.13	4,367.72	15.96	15.93	-103.30	-37.01	-1,247.60	1,212.63	1,180.77	31.87	38.055	
4,500.00	4,491.14	4,477.12	4,467.44	16.34	16.30	-103.29	-30.28	-1,250.51	1,213.64	1,181.03	32.61	37.215	
4,600.00	4,590.90	4,577.12	4,567.17	16.71	16.67	-103.28	-23.55	-1,253.43	1,214.65	1,181.29	33.36	36.413	
4,700.00	4,690.66	4,677.11	4,666.89	17.08	17.05	-103.27	-16.82	-1,256.34	1,215.66	1,181.56	34.10	35.646	
4,800.00	4,790.41	4,777.11	4,766.62	17.45	17.42	-103.25	-10.10	-1,259.26	1,216.67	1,181.82	34.85	34.911	
4,818.08	4,808.45	4,795.19	4,784.65	17.52	17.49	-103.25	-8.88	-1,259.78	1,216.85	1,181.87	34.99	34.782	
4,900.00	4,890.22	4,877.09	4,866.34	17.82	17.80	-103.20	-3.37	-1,262.17	1,217.71	1,182.12	35.59	34.212	
5,000.00	4,990.16	4,977.02	4,965.99	18.18	18.17	-103.03	3.35	-1,265.08	1,218.87	1,182.55	36.33	33.554	
5,084.85	5,075.00	5,061.70	5,050.44	18.48	18.49	-102.79	9.05	-1,267.55	1,219.97	1,183.03	36.94	33.027	
5,100.00	5,090.15	5,076.81	5,065.51	18.53	18.54	-102.74	10.07	-1,267.99	1,220.17	1,183.13	37.05	32.936	
5,200.00	5,190.15	5,176.54	5,164.98	18.88	18.92	-102.40	16.78	-1,270.90	1,221.56	1,183.80	37.76	32.347	
5,300.00	5,290.15	5,276.27	5,264.44	19.23	19.29	-102.06	23.49	-1,273.81	1,222.99	1,184.50	38.48	31.780	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #133H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MVWD												Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,400.00	5,390.15	5,376.00	5,363.90	19.57	19.67	-101.73	30.20	-1,276.71	1,224.46	1,185.26	39.20	31.236	
5,500.00	5,490.15	5,475.73	5,463.36	19.92	20.04	-101.39	36.91	-1,279.62	1,225.97	1,186.05	39.92	30.711	
5,600.00	5,590.15	5,575.46	5,562.83	20.27	20.41	-101.06	43.62	-1,282.53	1,227.52	1,186.88	40.64	30.206	
5,700.00	5,690.15	5,675.19	5,662.29	20.62	20.79	-100.72	50.33	-1,285.44	1,229.12	1,187.76	41.36	29.720	
5,800.00	5,790.15	5,774.92	5,761.75	20.97	21.16	-100.39	57.04	-1,288.34	1,230.75	1,188.68	42.08	29.250	
5,900.00	5,890.15	5,874.66	5,861.21	21.32	21.53	-100.06	63.75	-1,291.25	1,232.43	1,189.64	42.80	28.798	
6,000.00	5,990.15	5,974.39	5,960.67	21.67	21.91	-99.73	70.46	-1,294.16	1,234.15	1,190.64	43.52	28.361	
6,100.00	6,090.15	6,074.12	6,060.14	22.02	22.28	-99.40	77.16	-1,297.06	1,235.91	1,191.68	44.24	27.939	
6,200.00	6,190.15	6,173.85	6,159.60	22.37	22.65	-99.07	83.87	-1,299.97	1,237.71	1,192.76	44.96	27.532	
6,300.00	6,290.15	6,273.58	6,259.06	22.72	23.03	-98.75	90.58	-1,302.88	1,239.56	1,193.88	45.68	27.138	
6,400.00	6,390.15	6,373.31	6,358.52	23.07	23.40	-98.42	97.29	-1,305.78	1,241.44	1,195.04	46.40	26.757	
6,500.00	6,490.15	6,473.04	6,457.99	23.42	23.77	-98.09	104.00	-1,308.69	1,243.36	1,196.24	47.12	26.389	
6,600.00	6,590.15	6,572.77	6,557.45	23.77	24.15	-97.77	110.71	-1,311.60	1,245.33	1,197.49	47.84	26.032	
6,700.00	6,690.15	6,672.50	6,656.91	24.12	24.52	-97.45	117.42	-1,314.51	1,247.33	1,198.77	48.56	25.687	
6,800.00	6,790.15	6,772.23	6,756.37	24.47	24.89	-97.12	124.13	-1,317.41	1,249.37	1,200.09	49.28	25.353	
6,900.00	6,890.15	6,871.96	6,855.84	24.83	25.27	-96.80	130.84	-1,320.32	1,251.45	1,201.46	50.00	25.029	
7,000.00	6,990.15	6,971.69	6,955.30	25.18	25.64	-96.48	137.55	-1,323.23	1,253.58	1,202.86	50.72	24.715	
7,100.00	7,090.15	7,071.43	7,054.76	25.53	26.01	-96.16	144.26	-1,326.13	1,255.74	1,204.30	51.44	24.411	
7,200.00	7,190.15	7,171.16	7,154.22	25.88	26.39	-95.84	150.97	-1,329.04	1,257.94	1,205.78	52.16	24.116	
7,300.00	7,290.15	7,270.89	7,253.69	26.23	26.76	-95.53	157.68	-1,331.95	1,260.18	1,207.29	52.88	23.829	
7,400.00	7,390.15	7,370.62	7,353.15	26.59	27.14	-95.21	164.39	-1,334.85	1,262.46	1,208.85	53.61	23.551	
7,500.00	7,490.15	7,470.35	7,452.61	26.94	27.51	-94.90	171.10	-1,337.76	1,264.77	1,210.45	54.33	23.281	
7,600.00	7,590.15	7,570.08	7,552.07	27.29	27.88	-94.58	177.81	-1,340.67	1,267.13	1,212.08	55.05	23.019	
7,700.00	7,690.15	7,669.81	7,651.54	27.65	28.26	-94.27	184.52	-1,343.57	1,269.52	1,213.75	55.77	22.764	
7,800.00	7,790.15	7,769.54	7,751.00	28.00	28.63	-93.96	191.23	-1,346.48	1,271.95	1,215.46	56.49	22.516	
7,900.00	7,890.15	7,869.27	7,850.46	28.35	29.00	-93.65	197.94	-1,349.39	1,274.42	1,217.21	57.21	22.275	
8,000.00	7,990.15	7,969.00	7,949.92	28.71	29.38	-93.34	204.65	-1,352.30	1,276.92	1,218.99	57.93	22.041	
8,100.00	8,090.15	8,068.73	8,049.38	29.06	29.75	-93.03	211.36	-1,355.20	1,279.47	1,220.81	58.65	21.813	
8,200.00	8,190.15	8,168.46	8,148.85	29.41	30.12	-92.73	218.07	-1,358.11	1,282.05	1,222.67	59.38	21.592	
8,300.00	8,290.15	8,268.20	8,248.31	29.77	30.50	-92.42	224.78	-1,361.02	1,284.66	1,224.56	60.10	21.376	
8,400.00	8,390.15	8,367.93	8,347.77	30.12	30.87	-92.12	231.49	-1,363.92	1,287.31	1,226.50	60.82	21.166	
8,500.00	8,490.15	8,467.66	8,447.23	30.48	31.25	-91.81	238.20	-1,366.83	1,290.00	1,228.46	61.54	20.962	
8,600.00	8,590.15	8,567.39	8,546.70	30.83	31.62	-91.51	244.91	-1,369.74	1,292.73	1,230.47	62.26	20.763	
8,700.00	8,690.15	8,667.12	8,646.16	31.18	31.99	-91.21	251.62	-1,372.64	1,295.49	1,232.51	62.98	20.569	
8,800.00	8,790.15	8,767.40	8,746.18	31.54	32.37	-90.91	258.37	-1,375.57	1,298.28	1,234.58	63.71	20.379	
8,900.00	8,890.15	8,882.32	8,860.90	31.89	32.79	-90.64	264.40	-1,378.18	1,300.49	1,236.01	64.48	20.169	
9,000.00	8,990.15	8,997.53	8,976.06	32.25	33.20	-90.52	267.26	-1,379.42	1,301.54	1,236.30	65.24	19.950	
9,100.00	9,090.15	9,103.62	9,082.15	32.60	33.56	-90.51	267.52	-1,379.53	1,301.64	1,236.68	65.96	19.734	
9,200.00	9,190.15	9,203.62	9,182.15	32.96	33.91	-90.51	267.52	-1,379.53	1,301.64	1,234.98	66.66	19.528	
9,300.00	9,290.15	9,303.62	9,282.15	33.31	34.25	-90.51	267.52	-1,379.53	1,301.64	1,234.28	67.36	19.325	
9,400.00	9,390.15	9,403.62	9,382.15	33.67	34.59	-90.51	267.52	-1,379.53	1,301.64	1,233.58	68.06	19.126	
9,500.00	9,490.15	9,503.62	9,482.15	34.02	34.94	-90.51	267.52	-1,379.53	1,301.64	1,232.88	68.76	18.931	
9,600.00	9,590.15	9,603.62	9,582.15	34.38	35.28	-90.51	267.52	-1,379.53	1,301.64	1,232.18	69.46	18.740	
9,700.00	9,690.15	9,703.62	9,682.15	34.73	35.63	-90.51	267.52	-1,379.53	1,301.64	1,231.48	70.16	18.553	
9,800.00	9,790.15	9,803.62	9,782.15	35.09	35.97	-90.51	267.52	-1,379.53	1,301.64	1,230.78	70.86	18.370	
9,900.00	9,890.15	9,903.62	9,882.15	35.44	36.32	-90.51	267.52	-1,379.53	1,301.64	1,230.08	71.56	18.190	
10,000.00	9,990.15	10,003.62	9,982.15	35.80	36.66	-90.51	267.52	-1,379.53	1,301.64	1,229.37	72.26	18.013	
10,100.00	10,090.15	10,103.62	10,082.15	36.15	37.01	-90.51	267.52	-1,379.53	1,301.64	1,228.67	72.96	17.840	
10,200.00	10,190.15	10,203.62	10,182.15	36.51	37.35	-90.51	267.52	-1,379.53	1,301.64	1,227.97	73.67	17.670	
10,300.00	10,290.15	10,303.62	10,282.15	36.86	37.70	-90.51	267.52	-1,379.53	1,301.64	1,227.27	74.37	17.503	
10,400.00	10,390.15	10,403.62	10,382.15	37.22	38.05	-90.51	267.52	-1,379.53	1,301.64	1,226.57	75.07	17.339	
10,500.00	10,490.15	10,503.62	10,482.15	37.57	38.39	-90.51	267.52	-1,379.53	1,301.64	1,225.86	75.77	17.178	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #133H - Wellbore #1 - Design #1														Offset Site Error:	0.00 usft
Survey Program: 0-MWD														Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
10,600.00	10,590.15	10,603.62	10,582.15	37.93	38.74	-90.51	267.52	-1,379.53	1,301.64	1,225.16	76.48	17.020			
10,700.00	10,690.15	10,703.62	10,682.15	38.29	39.09	-90.51	267.52	-1,379.53	1,301.64	1,224.46	77.18	16.865			
10,800.00	10,790.15	10,803.62	10,782.15	38.64	39.43	-90.51	267.52	-1,379.53	1,301.64	1,223.75	77.88	16.712			
10,900.00	10,890.15	10,903.62	10,882.15	39.00	39.78	-90.51	267.52	-1,379.53	1,301.64	1,223.05	78.59	16.563			
11,000.00	10,990.15	11,003.62	10,982.15	39.35	40.13	-90.51	267.52	-1,379.53	1,301.64	1,222.34	79.29	16.416			
11,100.00	11,090.15	11,103.62	11,082.15	39.71	40.47	-90.51	267.52	-1,379.53	1,301.64	1,221.64	80.00	16.271			
11,200.00	11,190.15	11,203.62	11,182.15	40.07	40.82	-90.51	267.52	-1,379.53	1,301.64	1,220.93	80.70	16.129			
11,300.00	11,290.15	11,303.62	11,282.15	40.42	41.17	-90.51	267.52	-1,379.53	1,301.64	1,220.23	81.41	15.989			
11,400.00	11,390.15	11,403.62	11,382.15	40.78	41.52	-90.51	267.52	-1,379.53	1,301.64	1,219.52	82.12	15.852			
11,400.89	11,391.04	11,404.51	11,383.04	40.78	41.52	-90.51	267.52	-1,379.53	1,301.64	1,219.52	82.12	15.851			
11,450.00	11,440.09	11,443.47	11,422.00	40.94	41.65	-90.43	267.14	-1,379.61	1,301.33	1,218.91	82.42	15.790			
11,500.00	11,489.66	11,477.21	11,455.66	41.09	41.75	-90.25	264.96	-1,380.06	1,300.73	1,218.06	82.66	15.735			
11,550.00	11,538.47	11,511.03	11,489.21	41.24	41.85	-89.97	260.84	-1,380.93	1,299.88	1,216.99	82.89	15.682			
11,600.00	11,586.17	11,550.00	11,527.48	41.37	41.96	-89.64	253.69	-1,382.42	1,298.82	1,215.71	83.12	15.627			
11,650.00	11,632.38	11,579.03	11,555.62	41.50	42.03	-89.12	246.72	-1,383.88	1,297.53	1,214.25	83.28	15.580			
11,700.00	11,676.75	11,613.28	11,588.31	41.61	42.11	-88.56	236.71	-1,385.97	1,296.08	1,212.63	83.45	15.531			
11,750.00	11,718.95	11,650.00	11,622.60	41.72	42.19	-87.96	223.89	-1,388.65	1,294.47	1,210.85	83.62	15.480			
11,800.00	11,758.65	11,682.47	11,652.17	41.81	42.25	-87.21	210.77	-1,391.39	1,292.75	1,208.99	83.76	15.434			
11,850.00	11,795.55	11,717.49	11,683.16	41.90	42.31	-86.45	194.81	-1,394.72	1,290.95	1,207.05	83.90	15.387			
11,900.00	11,829.38	11,750.00	11,710.99	41.99	42.36	-85.56	178.37	-1,398.16	1,289.11	1,205.08	84.03	15.341			
11,950.00	11,859.87	11,788.61	11,742.74	42.08	42.42	-84.78	156.86	-1,402.65	1,287.26	1,203.08	84.18	15.291			
12,000.00	11,886.79	11,824.83	11,771.11	42.18	42.46	-83.90	134.84	-1,407.25	1,285.48	1,201.15	84.33	15.244			
12,050.00	11,909.94	11,861.57	11,798.37	42.28	42.50	-83.02	110.74	-1,412.28	1,283.78	1,199.30	84.48	15.197			
12,100.00	11,929.14	11,900.00	11,825.15	42.38	42.53	-82.19	83.77	-1,417.92	1,282.23	1,197.59	84.64	15.149			
12,150.00	11,944.24	11,936.93	11,849.08	42.49	42.56	-81.32	56.25	-1,423.67	1,280.87	1,196.08	84.80	15.105			
12,200.00	11,955.14	11,975.73	11,872.22	42.60	42.58	-80.53	25.77	-1,430.03	1,279.76	1,194.79	84.96	15.063			
12,250.00	11,961.74	12,015.42	11,893.65	42.71	42.59	-79.80	-6.92	-1,436.86	1,278.92	1,193.79	85.13	15.023			
12,300.00	11,964.00	12,056.14	11,913.19	42.82	42.60	-79.16	-41.88	-1,444.17	1,278.41	1,193.12	85.29	14.989			
12,300.89	11,964.00	12,056.87	11,913.51	42.82	42.60	-79.15	-42.53	-1,444.30	1,278.41	1,193.11	85.29	14.988			
12,312.79	11,964.00	12,066.79	11,917.87	42.85	42.61	-79.02	-51.24	-1,446.12	1,278.37	1,193.03	85.34	14.980			
12,400.00	11,964.00	12,144.31	11,946.51	43.07	42.62	-78.34	-121.70	-1,460.84	1,280.28	1,194.65	85.63	14.952			
12,500.00	11,964.00	12,241.90	11,968.34	43.38	42.67	-78.12	-214.69	-1,480.27	1,286.52	1,200.50	86.02	14.956			
12,600.00	11,964.00	12,360.73	11,974.00	43.75	42.83	-78.96	-330.80	-1,504.27	1,296.13	1,209.62	86.52	14.981			
12,700.00	11,964.00	12,543.18	11,974.00	44.17	43.25	-82.61	-510.87	-1,533.47	1,304.81	1,217.56	87.24	14.956			
12,800.00	11,964.00	12,726.87	11,974.00	44.64	43.83	-86.29	-693.66	-1,551.23	1,310.58	1,222.44	88.15	14.868			
12,883.71	11,964.00	12,881.22	11,974.00	45.07	44.43	-89.37	-847.88	-1,557.07	1,313.17	1,224.13	89.04	14.748			
12,900.00	11,964.00	12,911.29	11,974.00	45.15	44.56	-89.98	-877.96	-1,557.24	1,313.39	1,224.16	89.22	14.721			
13,000.00	11,964.00	13,020.17	11,974.00	45.72	45.07	-90.36	-986.83	-1,556.61	1,313.55	1,223.28	90.27	14.551			
13,100.00	11,964.00	13,120.17	11,974.00	46.34	45.60	-90.36	-1,086.83	-1,555.98	1,313.68	1,222.27	91.41	14.371			
13,200.00	11,964.00	13,220.17	11,974.00	47.01	46.17	-90.36	-1,186.83	-1,555.35	1,313.80	1,221.15	92.65	14.180			
13,300.00	11,964.00	13,320.17	11,974.00	47.73	46.79	-90.36	-1,286.83	-1,554.71	1,313.93	1,219.94	94.00	13.979			
13,400.00	11,964.00	13,420.17	11,974.00	48.49	47.47	-90.36	-1,386.82	-1,554.08	1,314.06	1,218.63	95.43	13.769			
13,500.00	11,964.00	13,520.17	11,974.00	49.30	48.18	-90.36	-1,486.82	-1,553.45	1,314.19	1,217.23	96.96	13.554			
13,600.00	11,964.00	13,620.17	11,974.00	50.14	48.95	-90.36	-1,586.82	-1,552.81	1,314.32	1,215.74	98.58	13.333			
13,700.00	11,964.00	13,720.17	11,974.00	51.03	49.75	-90.36	-1,686.82	-1,552.18	1,314.45	1,214.17	100.28	13.108			
13,800.00	11,964.00	13,820.17	11,974.00	51.95	50.60	-90.36	-1,786.81	-1,551.55	1,314.57	1,212.52	102.05	12.881			
13,900.00	11,964.00	13,920.17	11,974.00	52.91	51.48	-90.36	-1,886.81	-1,550.91	1,314.70	1,210.80	103.91	12.653			
14,000.00	11,964.00	14,020.17	11,974.00	53.91	52.41	-90.36	-1,986.81	-1,550.28	1,314.83	1,209.00	105.83	12.424			
14,100.00	11,964.00	14,120.17	11,974.00	54.93	53.36	-90.36	-2,086.81	-1,549.65	1,314.96	1,207.14	107.82	12.186			
14,200.00	11,964.00	14,220.17	11,974.00	55.99	54.35	-90.36	-2,186.81	-1,549.01	1,315.09	1,205.21	109.87	11.969			
14,300.00	11,964.00	14,320.17	11,974.00	57.07	55.38	-90.36	-2,286.80	-1,548.38	1,315.21	1,203.23	111.99	11.745			
14,400.00	11,964.00	14,420.17	11,974.00	58.18	56.43	-90.36	-2,386.80	-1,547.75	1,315.34	1,201.19	114.16	11.522			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #133H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning:
14,500.00	11,964.00	14,520.17	11,974.00	59.32	57.51	-90.36	-2,486.80	-1,547.11	1,315.47	1,199.09	116.38	11.303	
14,600.00	11,964.00	14,620.17	11,974.00	60.48	58.61	-90.36	-2,586.80	-1,546.48	1,315.60	1,196.95	118.65	11.088	
14,700.00	11,964.00	14,720.17	11,974.00	61.66	59.74	-90.36	-2,686.80	-1,545.85	1,315.73	1,194.75	120.97	10.876	
14,800.00	11,964.00	14,820.17	11,974.00	62.86	60.90	-90.36	-2,786.79	-1,545.21	1,315.85	1,192.51	123.34	10.669	
14,900.00	11,964.00	14,920.17	11,974.00	64.09	62.08	-90.36	-2,886.79	-1,544.58	1,315.98	1,190.23	125.75	10.465	
15,000.00	11,964.00	15,020.17	11,974.00	65.33	63.28	-90.36	-2,986.79	-1,543.95	1,316.11	1,187.91	128.20	10.266	
15,100.00	11,964.00	15,120.17	11,974.00	66.59	64.50	-90.36	-3,086.79	-1,543.31	1,316.24	1,185.56	130.68	10.072	
15,200.00	11,964.00	15,220.17	11,974.00	67.87	65.73	-90.36	-3,186.79	-1,542.68	1,316.37	1,183.16	133.20	9.882	
15,300.00	11,964.00	15,320.17	11,974.00	69.16	66.99	-90.36	-3,286.78	-1,542.04	1,316.49	1,180.73	135.76	9.697	
15,400.00	11,964.00	15,420.17	11,974.00	70.47	68.26	-90.36	-3,386.78	-1,541.41	1,316.62	1,178.28	138.35	9.517	
15,500.00	11,964.00	15,520.17	11,974.00	71.79	69.55	-90.36	-3,486.78	-1,540.78	1,316.75	1,175.79	140.96	9.341	
15,600.00	11,964.00	15,620.17	11,974.00	73.13	70.85	-90.36	-3,586.78	-1,540.14	1,316.88	1,173.27	143.61	9.170	
15,700.00	11,964.00	15,720.17	11,974.00	74.47	72.17	-90.36	-3,686.78	-1,539.51	1,317.01	1,170.73	146.28	9.003	
15,800.00	11,964.00	15,820.17	11,974.00	75.83	73.50	-90.36	-3,786.77	-1,538.88	1,317.14	1,168.16	148.98	8.841	
15,900.00	11,964.00	15,920.17	11,974.00	77.21	74.85	-90.36	-3,886.77	-1,538.24	1,317.26	1,165.56	151.70	8.683	
16,000.00	11,964.00	16,020.17	11,974.00	78.59	76.20	-90.36	-3,986.77	-1,537.61	1,317.39	1,162.95	154.45	8.530	
16,100.00	11,964.00	16,120.17	11,974.00	79.98	77.57	-90.36	-4,086.77	-1,536.98	1,317.52	1,160.31	157.21	8.381	
16,200.00	11,964.00	16,220.17	11,974.00	81.38	78.95	-90.36	-4,186.76	-1,536.34	1,317.65	1,157.65	160.00	8.235	
16,300.00	11,964.00	16,320.17	11,974.00	82.80	80.34	-90.36	-4,286.76	-1,535.71	1,317.78	1,154.97	162.80	8.094	
16,400.00	11,964.00	16,420.17	11,974.00	84.22	81.74	-90.36	-4,386.76	-1,535.08	1,317.90	1,152.27	165.63	7.957	
16,500.00	11,964.00	16,520.17	11,974.00	85.65	83.15	-90.36	-4,486.76	-1,534.44	1,318.03	1,149.56	168.47	7.824	
16,600.00	11,964.00	16,620.17	11,974.00	87.08	84.56	-90.36	-4,586.76	-1,533.81	1,318.16	1,146.83	171.33	7.694	
16,700.00	11,964.00	16,720.17	11,974.00	88.53	85.99	-90.36	-4,686.75	-1,533.18	1,318.29	1,144.09	174.20	7.568	
16,740.74	11,964.00	16,760.91	11,974.00	89.12	86.57	-90.36	-4,727.49	-1,532.92	1,318.34	1,142.96	175.38	7.517	
16,741.61	11,964.00	16,761.75	11,974.00	89.14	86.61	-90.36	-4,728.34	-1,532.91	1,318.34	1,142.94	175.40	7.516 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset.Design Charles Ling Fed Com - Charles Ling Fed Com #203H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	Offset Wellbore Centre +E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.00	0.00	0.00	0.00	0.00	0.00	-103.29	-277.20	-1,173.63	1,205.94				
100.00	100.00	92.00	92.00	0.13	0.12	-103.29	-277.20	-1,173.63	1,205.92	1,205.67	0.25	4,901.004	
200.00	200.00	192.00	192.00	0.49	0.46	-103.29	-277.20	-1,173.63	1,205.92	1,204.97	0.94	1,276.680	
300.00	300.00	292.00	292.00	0.85	0.82	-103.29	-277.20	-1,173.63	1,205.92	1,204.26	1.66	725.793	
400.00	400.00	392.00	392.00	1.20	1.17	-103.29	-277.20	-1,173.63	1,205.92	1,203.54	2.38	507.016	
500.00	500.00	492.00	492.00	1.56	1.53	-103.29	-277.20	-1,173.63	1,205.92	1,202.82	3.10	389.583	
600.00	600.00	592.00	592.00	1.92	1.89	-103.29	-277.20	-1,173.63	1,205.92	1,202.11	3.81	316.319	
700.00	699.99	691.99	691.99	2.28	2.25	-103.33	-277.20	-1,173.63	1,205.88	1,201.35	4.53	266.273	
800.00	799.96	791.96	791.96	2.64	2.61	-103.45	-277.20	-1,173.63	1,205.78	1,200.54	5.24	229.900	
900.00	899.86	891.86	891.86	3.00	2.97	-103.66	-277.20	-1,173.63	1,205.63	1,199.66	5.96	202.230	
1,000.00	999.68	991.68	991.68	3.36	3.32	-103.95	-277.20	-1,173.63	1,205.43	1,198.75	6.68	180.446	
1,000.15	999.83	991.83	991.83	3.36	3.33	-103.95	-277.20	-1,173.63	1,205.43	1,198.75	6.68	180.416	
1,100.00	1,099.43	1,091.43	1,091.43	3.72	3.68	-104.28	-277.20	-1,173.63	1,205.25	1,197.85	7.40	162.842	
1,200.00	1,199.19	1,191.19	1,191.19	4.08	4.04	-104.62	-277.20	-1,173.63	1,205.11	1,196.99	8.12	148.338	
1,300.00	1,298.94	1,305.27	1,305.26	4.45	4.45	-104.91	-276.32	-1,173.21	1,204.47	1,195.57	8.90	135.364	
1,400.00	1,398.70	1,420.89	1,420.84	4.82	4.86	-105.12	-273.35	-1,171.80	1,202.56	1,192.88	9.68	124.284	
1,500.00	1,498.46	1,536.58	1,536.38	5.19	5.28	-105.25	-268.27	-1,169.39	1,199.35	1,188.89	10.45	114.729	
1,600.00	1,598.21	1,652.24	1,651.77	5.56	5.69	-105.30	-261.08	-1,165.97	1,194.83	1,183.60	11.23	106.385	
1,700.00	1,697.97	1,754.15	1,753.35	5.93	6.06	-105.33	-253.60	-1,162.42	1,189.49	1,177.52	11.97	99.410	
1,800.00	1,797.72	1,854.01	1,852.87	6.30	6.42	-105.37	-246.25	-1,158.93	1,184.14	1,171.45	12.70	93.275	
1,900.00	1,897.48	1,953.86	1,952.39	6.67	6.79	-105.41	-238.90	-1,155.44	1,178.79	1,165.37	13.43	87.798	
2,000.00	1,997.24	2,053.71	2,051.91	7.04	7.15	-105.45	-231.55	-1,151.94	1,173.45	1,159.29	14.16	82.879	
2,100.00	2,096.99	2,153.57	2,151.43	7.41	7.52	-105.49	-224.21	-1,148.45	1,168.10	1,153.21	14.89	78.438	
2,200.00	2,196.75	2,253.42	2,250.95	7.78	7.89	-105.53	-216.86	-1,144.96	1,162.75	1,147.13	15.63	74.410	
2,300.00	2,296.51	2,353.27	2,350.47	8.15	8.26	-105.58	-209.51	-1,141.47	1,157.41	1,141.05	16.36	70.739	
2,400.00	2,396.26	2,453.13	2,450.00	8.52	8.63	-105.62	-202.16	-1,137.98	1,152.06	1,134.97	17.10	67.382	
2,500.00	2,496.02	2,552.98	2,549.52	8.89	9.00	-105.66	-194.81	-1,134.49	1,146.72	1,128.89	17.83	64.300	
2,600.00	2,595.77	2,652.83	2,649.04	9.26	9.37	-105.70	-187.46	-1,131.00	1,141.38	1,122.81	18.57	61.460	
2,700.00	2,695.53	2,752.69	2,748.56	9.63	9.74	-105.74	-180.11	-1,127.51	1,136.03	1,116.73	19.31	58.836	
2,800.00	2,795.29	2,852.54	2,848.08	10.01	10.11	-105.79	-172.76	-1,124.02	1,130.69	1,110.64	20.05	56.403	
2,900.00	2,895.04	2,952.39	2,947.60	10.38	10.48	-105.83	-165.41	-1,120.52	1,125.35	1,104.57	20.78	54.143	
3,000.00	2,994.80	3,052.25	3,047.13	10.75	10.86	-105.88	-158.06	-1,117.03	1,120.01	1,098.49	21.52	52.037	
3,100.00	3,094.56	3,152.10	3,146.65	11.12	11.23	-105.92	-150.71	-1,113.54	1,114.67	1,092.41	22.26	50.070	
3,200.00	3,194.31	3,251.96	3,246.17	11.49	11.60	-105.96	-143.36	-1,110.05	1,109.33	1,086.33	23.00	48.228	
3,300.00	3,294.07	3,351.81	3,345.69	11.87	11.98	-106.01	-136.02	-1,106.56	1,103.99	1,080.25	23.74	46.501	
3,400.00	3,393.82	3,451.66	3,445.21	12.24	12.35	-106.06	-128.67	-1,103.07	1,098.65	1,074.17	24.48	44.878	
3,500.00	3,493.58	3,551.52	3,544.73	12.61	12.73	-106.10	-121.32	-1,099.58	1,093.31	1,068.09	25.22	43.350	
3,600.00	3,593.34	3,651.37	3,644.25	12.98	13.10	-106.15	-113.97	-1,096.09	1,087.98	1,062.02	25.96	41.909	
3,700.00	3,693.09	3,751.22	3,743.78	13.36	13.48	-106.20	-106.62	-1,092.60	1,082.64	1,055.94	26.70	40.547	
3,800.00	3,792.85	3,851.08	3,843.30	13.73	13.85	-106.24	-99.27	-1,089.11	1,077.31	1,049.87	27.44	39.259	
3,900.00	3,892.61	3,950.93	3,942.82	14.10	14.23	-106.29	-91.92	-1,085.61	1,071.97	1,043.79	28.18	38.038	
4,000.00	3,992.36	4,050.78	4,042.34	14.47	14.60	-106.34	-84.57	-1,082.12	1,066.64	1,037.72	28.92	36.880	
4,100.00	4,092.12	4,150.64	4,141.86	14.85	14.98	-106.39	-77.22	-1,078.63	1,061.31	1,031.64	29.66	35.779	
4,200.00	4,191.87	4,250.49	4,241.38	15.22	15.35	-106.44	-69.87	-1,075.14	1,055.97	1,025.57	30.40	34.732	
4,300.00	4,291.63	4,350.34	4,340.91	15.59	15.73	-106.49	-62.52	-1,071.65	1,050.64	1,019.50	31.14	33.734	
4,400.00	4,391.39	4,450.20	4,440.43	15.96	16.10	-106.54	-55.17	-1,068.16	1,045.31	1,013.43	31.89	32.783	
4,500.00	4,491.14	4,550.05	4,539.95	16.34	16.48	-106.59	-47.83	-1,064.67	1,039.98	1,007.36	32.63	31.875	
4,600.00	4,590.90	4,649.91	4,639.47	16.71	16.86	-106.64	-40.48	-1,061.18	1,034.65	1,001.29	33.37	31.008	
4,700.00	4,690.66	4,749.76	4,738.99	17.08	17.23	-106.69	-33.13	-1,057.69	1,029.32	995.22	34.11	30.178	
4,800.00	4,790.41	4,849.61	4,838.51	17.45	17.61	-106.75	-25.78	-1,054.20	1,024.00	989.15	34.85	29.383	
4,818.08	4,808.45	4,867.67	4,856.51	17.52	17.68	-106.76	-24.45	-1,053.56	1,023.03	988.05	34.98	29.243	
4,900.00	4,890.22	4,949.47	4,938.04	17.82	17.98	-106.75	-18.43	-1,050.70	1,018.65	983.06	35.59	28.623	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #203H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
5,000.00	4,990.16	5,049.29	5,037.52	18.18	18.36	-106.61	-11.08	-1,047.21	1,013.25	976.93	36.32	27.899		
5,084.85	5,075.00	5,133.90	5,121.86	18.48	18.68	-106.37	-4.85	-1,044.26	1,008.64	971.71	36.93	27.312		
5,100.00	5,090.15	5,149.00	5,136.91	18.53	18.74	-106.32	-3.74	-1,043.73	1,007.81	970.78	37.04	27.210		
5,200.00	5,190.15	5,248.67	5,236.25	18.88	19.11	-105.97	3.59	-1,040.24	1,002.40	964.64	37.76	26.549		
5,300.00	5,290.15	5,348.34	5,335.58	19.23	19.49	-105.62	10.93	-1,036.76	997.02	958.55	38.47	25.914		
5,400.00	5,390.15	5,448.01	5,434.92	19.57	19.86	-105.27	18.26	-1,033.27	991.68	952.49	39.19	25.302		
5,500.00	5,490.15	5,547.67	5,534.25	19.92	20.24	-104.91	25.60	-1,029.79	986.38	946.47	39.91	24.713		
5,600.00	5,590.15	5,647.34	5,633.59	20.27	20.61	-104.55	32.93	-1,026.31	981.12	940.48	40.63	24.145		
5,700.00	5,690.15	5,747.01	5,732.93	20.62	20.99	-104.18	40.27	-1,022.82	975.89	934.54	41.35	23.598		
5,800.00	5,790.15	5,846.68	5,832.26	20.97	21.37	-103.81	47.61	-1,019.34	970.71	928.63	42.08	23.070		
5,900.00	5,890.15	5,946.34	5,931.60	21.32	21.74	-103.44	54.94	-1,015.85	965.57	922.77	42.80	22.561		
6,000.00	5,990.15	6,046.01	6,030.93	21.67	22.12	-103.06	62.28	-1,012.37	960.47	916.95	43.52	22.069		
6,100.00	6,090.15	6,145.68	6,130.27	22.02	22.49	-102.68	69.61	-1,008.88	955.41	911.17	44.24	21.594		
6,200.00	6,190.15	6,245.35	6,229.61	22.37	22.87	-102.29	76.95	-1,005.40	950.40	905.43	44.97	21.135		
6,300.00	6,290.15	6,345.01	6,328.94	22.72	23.25	-101.90	84.28	-1,001.91	945.42	899.73	45.69	20.692		
6,400.00	6,390.15	6,444.68	6,428.28	23.07	23.62	-101.51	91.62	-998.43	940.50	894.08	46.42	20.262		
6,500.00	6,490.15	6,544.35	6,527.61	23.42	24.00	-101.11	98.95	-994.94	935.62	888.48	47.14	19.847		
6,600.00	6,590.15	6,644.02	6,626.95	23.77	24.38	-100.71	106.29	-991.46	930.78	882.91	47.87	19.445		
6,700.00	6,690.15	6,743.68	6,726.29	24.12	24.75	-100.30	113.63	-987.98	925.99	877.40	48.59	19.056		
6,800.00	6,790.15	6,843.35	6,825.62	24.47	25.13	-99.89	120.96	-984.49	921.25	871.93	49.32	18.679		
6,900.00	6,890.15	6,943.02	6,924.96	24.83	25.50	-99.48	128.30	-981.01	916.55	866.51	50.05	18.314		
7,000.00	6,990.15	7,042.69	7,024.30	25.18	25.88	-99.06	135.63	-977.52	911.91	861.13	50.77	17.961		
7,100.00	7,090.15	7,142.35	7,123.63	25.53	26.26	-98.63	142.97	-974.04	907.31	855.81	51.50	17.617		
7,200.00	7,190.15	7,242.02	7,222.97	25.88	26.63	-98.21	150.30	-970.55	902.76	850.53	52.23	17.285		
7,300.00	7,290.15	7,341.69	7,322.30	26.23	27.01	-97.77	157.64	-967.07	898.27	845.31	52.96	16.962		
7,400.00	7,390.15	7,441.36	7,421.64	26.59	27.39	-97.34	164.97	-963.58	893.82	840.14	53.69	16.649		
7,500.00	7,490.15	7,541.02	7,520.98	26.94	27.76	-96.90	172.31	-960.10	889.43	835.02	54.42	16.345		
7,600.00	7,590.15	7,640.69	7,620.31	27.29	28.14	-96.45	179.64	-956.61	885.09	829.95	55.15	16.050		
7,700.00	7,690.15	7,740.36	7,719.65	27.65	28.52	-96.00	186.98	-953.13	880.81	824.93	55.88	15.764		
7,800.00	7,790.15	7,840.03	7,818.98	28.00	28.89	-95.55	194.32	-949.65	876.58	819.97	56.61	15.486		
7,900.00	7,890.15	7,939.69	7,918.32	28.35	29.27	-95.09	201.65	-946.16	872.41	815.07	57.34	15.215		
8,000.00	7,990.15	8,039.36	8,017.66	28.71	29.65	-94.63	208.99	-942.68	868.29	810.22	58.07	14.953		
8,100.00	8,090.15	8,139.03	8,116.99	29.06	30.02	-94.16	216.32	-939.19	864.23	805.43	58.80	14.698		
8,200.00	8,190.15	8,238.70	8,216.33	29.41	30.40	-93.69	223.66	-935.71	860.22	800.69	59.53	14.450		
8,300.00	8,290.15	8,338.36	8,315.66	29.77	30.78	-93.22	230.99	-932.22	856.28	796.02	60.26	14.209		
8,400.00	8,390.15	8,438.03	8,415.00	30.12	31.15	-92.74	238.33	-928.74	852.40	791.40	61.00	13.974		
8,500.00	8,490.15	8,537.70	8,514.34	30.48	31.53	-92.25	245.66	-925.25	848.57	786.84	61.73	13.747		
8,600.00	8,590.15	8,637.37	8,613.67	30.83	31.91	-91.77	253.00	-921.77	844.81	782.35	62.46	13.525		
8,700.00	8,690.15	8,734.78	8,710.76	31.18	32.27	-91.29	260.17	-918.36	841.11	777.92	63.19	13.311		
8,800.00	8,790.15	8,827.67	8,803.43	31.54	32.62	-90.89	265.99	-915.60	838.02	774.12	63.90	13.114		
8,900.00	8,890.15	8,918.76	8,894.42	31.89	32.95	-90.64	269.72	-913.83	836.02	771.43	64.59	12.943		
9,000.00	8,990.15	9,009.99	8,985.63	32.25	33.27	-90.52	271.48	-912.99	835.08	769.81	65.27	12.794		
9,055.41	9,045.56	9,061.92	9,037.56	32.44	33.45	-90.51	271.64	-912.91	835.00	769.35	65.65	12.720		
9,100.00	9,090.15	9,106.51	9,082.15	32.60	33.60	-90.51	271.64	-912.91	835.00	769.04	65.96	12.660		
9,200.00	9,190.15	9,206.51	9,182.15	32.96	33.94	-90.51	271.64	-912.91	835.00	768.34	66.66	12.527		
9,300.00	9,290.15	9,306.51	9,282.15	33.31	34.29	-90.51	271.64	-912.91	835.00	767.64	67.36	12.397		
9,400.00	9,390.15	9,406.51	9,382.15	33.67	34.63	-90.51	271.64	-912.91	835.00	766.94	68.05	12.269		
9,500.00	9,490.15	9,506.51	9,482.15	34.02	34.97	-90.51	271.64	-912.91	835.00	766.24	68.75	12.145		
9,600.00	9,590.15	9,606.51	9,582.15	34.38	35.32	-90.51	271.64	-912.91	835.00	765.54	69.45	12.022		
9,700.00	9,690.15	9,706.51	9,682.15	34.73	35.66	-90.51	271.64	-912.91	835.00	764.84	70.16	11.902		
9,800.00	9,790.15	9,806.51	9,782.15	35.09	36.00	-90.51	271.64	-912.91	835.00	764.14	70.86	11.784		
9,900.00	9,890.15	9,906.51	9,882.15	35.44	36.35	-90.51	271.64	-912.91	835.00	763.44	71.56	11.669		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #203H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
10,000.00	9,990.15	10,006.51	9,982.15	35.80	36.69	-90.51	271.64	-912.91	835.00	762.74	72.26	11.556		
10,100.00	10,090.15	10,106.51	10,082.15	36.15	37.04	-90.51	271.64	-912.91	835.00	762.04	72.96	11.445		
10,200.00	10,190.15	10,206.51	10,182.15	36.51	37.38	-90.51	271.64	-912.91	835.00	761.34	73.66	11.336		
10,300.00	10,290.15	10,306.51	10,282.15	36.86	37.73	-90.51	271.64	-912.91	835.00	760.63	74.36	11.228		
10,400.00	10,390.15	10,406.51	10,382.15	37.22	38.07	-90.51	271.64	-912.91	835.00	759.93	75.07	11.123		
10,500.00	10,490.15	10,506.51	10,482.15	37.57	38.42	-90.51	271.64	-912.91	835.00	759.23	75.77	11.020		
10,600.00	10,590.15	10,606.51	10,582.15	37.93	38.77	-90.51	271.64	-912.91	835.00	758.53	76.47	10.919		
10,700.00	10,690.15	10,706.51	10,682.15	38.29	39.11	-90.51	271.64	-912.91	835.00	757.82	77.18	10.819		
10,800.00	10,790.15	10,806.51	10,782.15	38.64	39.46	-90.51	271.64	-912.91	835.00	757.12	77.88	10.722		
10,900.00	10,890.15	10,906.51	10,882.15	39.00	39.80	-90.51	271.64	-912.91	835.00	756.42	78.58	10.626		
11,000.00	10,990.15	11,006.51	10,982.15	39.35	40.15	-90.51	271.64	-912.91	835.00	755.71	79.29	10.531		
11,100.00	11,090.15	11,106.51	11,082.15	39.71	40.50	-90.51	271.64	-912.91	835.00	755.01	79.99	10.439		
11,200.00	11,190.15	11,206.51	11,182.15	40.07	40.85	-90.51	271.64	-912.91	835.00	754.30	80.70	10.347		
11,300.00	11,290.15	11,306.51	11,282.15	40.42	41.19	-90.51	271.64	-912.91	835.00	753.60	81.40	10.258		
11,400.00	11,390.15	11,406.51	11,382.15	40.78	41.54	-90.51	271.64	-912.91	835.00	752.89	82.11	10.170		
11,400.89	11,391.04	11,407.40	11,383.04	40.78	41.54	-90.51	271.64	-912.91	835.00	752.89	82.11	10.169		
11,450.00	11,440.09	11,456.45	11,432.09	40.94	41.71	-90.37	271.64	-912.91	834.57	752.13	82.45	10.122		
11,500.00	11,489.66	11,506.02	11,481.66	41.09	41.89	-89.93	271.64	-912.91	833.30	750.53	82.77	10.067		
11,550.00	11,538.47	11,554.84	11,530.47	41.24	42.06	-89.20	271.64	-912.91	831.29	748.20	83.09	10.004		
11,600.00	11,586.17	11,602.53	11,578.17	41.37	42.22	-88.19	271.64	-912.91	828.72	745.32	83.40	9.936		
11,650.00	11,632.38	11,652.78	11,628.38	41.50	42.38	-87.01	269.78	-912.90	825.71	742.01	83.70	9.865		
11,700.00	11,676.75	11,704.92	11,680.07	41.61	42.53	-85.88	263.23	-912.85	822.25	738.28	83.97	9.792		
11,750.00	11,718.95	11,758.83	11,732.68	41.72	42.67	-84.83	251.54	-912.76	818.36	734.15	84.21	9.718		
11,800.00	11,758.65	11,814.65	11,785.74	41.81	42.79	-83.92	234.28	-912.63	814.05	729.63	84.42	9.643		
11,850.00	11,795.55	11,872.48	11,838.68	41.90	42.90	-83.17	211.05	-912.45	809.32	724.74	84.58	9.569		
11,900.00	11,829.38	11,932.43	11,890.79	41.99	43.00	-82.65	181.47	-912.22	804.18	719.49	84.69	9.496		
11,950.00	11,859.87	11,994.57	11,941.24	42.08	43.08	-82.39	145.23	-911.95	798.61	713.88	84.73	9.425		
12,000.00	11,886.79	12,058.94	11,989.03	42.18	43.14	-82.43	102.17	-911.62	792.62	707.90	84.72	9.356		
12,050.00	11,909.94	12,125.52	12,033.07	42.28	43.19	-82.81	52.29	-911.24	786.18	701.53	84.65	9.288		
12,100.00	11,929.14	12,194.22	12,072.13	42.38	43.22	-83.56	-4.17	-910.80	779.26	694.72	84.54	9.218		
12,150.00	11,944.24	12,264.88	12,104.96	42.49	43.25	-84.67	-66.69	-910.33	771.84	687.43	84.41	9.144		
12,200.00	11,955.14	12,337.24	12,130.35	42.60	43.28	-86.12	-134.40	-909.81	763.90	679.59	84.31	9.061		
12,250.00	11,961.74	12,410.22	12,147.11	42.71	43.31	-87.82	-205.37	-909.27	755.42	671.17	84.25	8.966		
12,300.00	11,964.00	12,471.76	12,155.61	42.82	43.36	-88.74	-266.31	-908.80	746.88	662.63	84.25	8.865		
12,300.89	11,964.00	12,472.86	12,155.73	42.82	43.36	-88.76	-267.40	-908.79	746.73	662.48	84.25	8.863		
12,400.00	11,964.00	12,591.52	12,161.00	43.07	43.50	-90.44	-385.87	-907.88	730.24	645.80	84.44	8.648		
12,500.00	11,964.00	12,690.37	12,161.00	43.38	43.69	-90.44	-484.72	-907.13	715.78	630.96	84.81	8.439		
12,600.00	11,964.00	12,789.69	12,161.00	43.75	43.94	-90.44	-584.04	-906.37	704.65	619.33	85.32	8.259		
12,700.00	11,964.00	12,889.35	12,161.00	44.17	44.24	-90.44	-683.69	-905.61	696.85	610.90	85.95	8.108		
12,800.00	11,964.00	12,989.23	12,161.00	44.64	44.61	-90.44	-783.58	-904.84	692.39	605.68	86.71	7.985		
12,883.71	11,964.00	13,072.93	12,161.00	45.07	44.96	-90.44	-867.27	-904.20	691.22	603.76	87.46	7.904		
12,900.00	11,964.00	13,089.22	12,161.00	45.15	45.03	-90.44	-883.56	-904.08	691.22	603.61	87.61	7.890		
13,000.00	11,964.00	13,189.22	12,161.00	45.72	45.51	-90.44	-983.56	-903.31	691.22	602.60	88.62	7.800		
13,100.00	11,964.00	13,289.22	12,161.00	46.34	46.04	-90.44	-1,083.56	-902.55	691.21	601.49	89.72	7.704		
13,200.00	11,964.00	13,389.22	12,161.00	47.01	46.62	-90.44	-1,183.55	-901.78	691.21	600.28	90.93	7.601		
13,300.00	11,964.00	13,489.22	12,161.00	47.73	47.25	-90.44	-1,283.55	-901.02	691.21	598.97	92.24	7.494		
13,400.00	11,964.00	13,589.22	12,161.00	48.49	47.93	-90.44	-1,383.55	-900.25	691.20	597.58	93.63	7.382		
13,500.00	11,964.00	13,689.22	12,161.00	49.30	48.66	-90.44	-1,483.55	-899.49	691.20	596.09	95.11	7.267		
13,600.00	11,964.00	13,789.22	12,161.00	50.14	49.43	-90.44	-1,583.54	-898.73	691.20	594.53	96.67	7.150		
13,700.00	11,964.00	13,889.22	12,161.00	51.03	50.24	-90.44	-1,683.54	-897.96	691.20	592.88	98.31	7.031		
13,800.00	11,964.00	13,989.22	12,161.00	51.95	51.09	-90.44	-1,783.54	-897.20	691.19	591.16	100.03	6.910		
13,900.00	11,964.00	14,089.22	12,161.00	52.91	51.98	-90.44	-1,883.53	-896.43	691.19	589.37	101.82	6.789		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #203H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
14,000.00	11,964.00	14,189.22	12,161.00	53.91	52.91	-90.44	-1,983.53	-895.67	691.19	587.52	103.67	6.667	
14,100.00	11,964.00	14,289.22	12,161.00	54.93	53.87	-90.44	-2,083.53	-894.90	691.18	585.59	105.59	6.546	
14,200.00	11,964.00	14,389.22	12,161.00	55.99	54.87	-90.44	-2,183.52	-894.14	691.18	583.61	107.57	6.426	
14,300.00	11,964.00	14,489.22	12,161.00	57.07	55.90	-90.44	-2,283.52	-893.37	691.18	581.57	109.60	6.306	
14,400.00	11,964.00	14,589.22	12,161.00	58.18	56.95	-90.44	-2,383.52	-892.61	691.17	579.48	111.69	6.188	
14,500.00	11,964.00	14,689.22	12,161.00	59.32	58.03	-90.44	-2,483.52	-891.84	691.17	577.34	113.83	6.072	
14,600.00	11,964.00	14,789.22	12,161.00	60.48	59.14	-90.44	-2,583.51	-891.08	691.17	575.14	116.02	5.957	
14,700.00	11,964.00	14,889.22	12,161.00	61.66	60.28	-90.44	-2,683.51	-890.31	691.16	572.91	118.26	5.844	
14,800.00	11,964.00	14,989.22	12,161.00	62.86	61.44	-90.44	-2,783.51	-889.55	691.16	570.62	120.54	5.734	
14,900.00	11,964.00	15,089.22	12,161.00	64.09	62.62	-90.44	-2,883.50	-888.78	691.16	568.30	122.86	5.626	
15,000.00	11,964.00	15,189.22	12,161.00	65.33	63.82	-90.44	-2,983.50	-888.02	691.16	565.94	125.21	5.520	
15,100.00	11,964.00	15,289.22	12,161.00	66.59	65.04	-90.44	-3,083.50	-887.25	691.15	563.55	127.61	5.416	
15,200.00	11,964.00	15,389.22	12,161.00	67.87	66.28	-90.44	-3,183.50	-886.49	691.15	561.12	130.03	5.315	
15,300.00	11,964.00	15,489.22	12,161.00	69.16	67.53	-90.44	-3,283.49	-885.72	691.15	558.65	132.49	5.216	
15,400.00	11,964.00	15,589.22	12,161.00	70.47	68.81	-90.44	-3,383.49	-884.96	691.14	556.16	134.98	5.120	
15,500.00	11,964.00	15,689.22	12,161.00	71.79	70.10	-90.44	-3,483.49	-884.19	691.14	553.64	137.50	5.026	
15,600.00	11,964.00	15,789.22	12,161.00	73.13	71.40	-90.44	-3,583.48	-883.43	691.14	551.09	140.05	4.935	
15,700.00	11,964.00	15,889.22	12,161.00	74.47	72.72	-90.44	-3,683.48	-882.67	691.13	548.51	142.62	4.846	
15,800.00	11,964.00	15,989.22	12,161.00	75.83	74.05	-90.44	-3,783.48	-881.90	691.13	545.91	145.22	4.759	
15,900.00	11,964.00	16,089.22	12,161.00	77.21	75.40	-90.44	-3,883.47	-881.14	691.13	543.29	147.84	4.675	
16,000.00	11,964.00	16,189.22	12,161.00	78.59	76.75	-90.44	-3,983.47	-880.37	691.12	540.64	150.48	4.593	
16,100.00	11,964.00	16,289.22	12,161.00	79.98	78.12	-90.44	-4,083.47	-879.61	691.12	537.97	153.15	4.513	
16,200.00	11,964.00	16,389.22	12,161.00	81.38	79.50	-90.44	-4,183.47	-878.84	691.12	535.29	155.83	4.435	
16,300.00	11,964.00	16,489.22	12,161.00	82.80	80.89	-90.44	-4,283.46	-878.08	691.12	532.58	158.53	4.359	
16,400.00	11,964.00	16,589.22	12,161.00	84.22	82.29	-90.44	-4,383.46	-877.31	691.11	529.86	161.25	4.286	
16,500.00	11,964.00	16,689.22	12,161.00	85.65	83.70	-90.44	-4,483.46	-876.55	691.11	527.12	163.99	4.214	
16,600.00	11,964.00	16,789.22	12,161.00	87.08	85.11	-90.44	-4,583.45	-875.78	691.11	524.36	166.74	4.145	
16,700.00	11,964.00	16,889.22	12,161.00	88.53	86.54	-90.44	-4,683.45	-875.02	691.10	521.59	169.51	4.077	
16,740.19	11,964.00	16,929.41	12,161.00	89.11	87.11	-90.44	-4,723.64	-874.71	691.10	520.48	170.63	4.050 CC	
16,740.74	11,964.00	16,929.44	12,161.00	89.12	87.11	-90.39	-4,723.67	-874.71	691.10	520.47	170.63	4.050	
16,741.61	11,964.00	16,929.44	12,161.00	89.14	87.11	-90.32	-4,723.67	-874.71	691.10	520.46	170.64	4.050 ES, SF	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #204H - Wellbore #1 - Design #1											Offset Site Error:	0.00 usft
Survey Program: 0-MWD											Offset Well Error:	0.00 usft
Reference	Offset		Semi Major Axis		Distance		Minimum Separation		Separation Factor		Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor
0.00	0.00	0.00	0.00	0.00	0.00	-90.32	-0.17	-30.11	30.11			
100.00	100.00	100.00	100.00	0.13	0.13	-90.32	-0.17	-30.11	30.11	29.85	0.26	117.478
200.00	200.00	200.00	200.00	0.49	0.49	-90.32	-0.17	-30.11	30.11	29.14	0.97	30.938
300.00	300.00	300.00	300.00	0.85	0.85	-90.32	-0.17	-30.11	30.11	28.42	1.69	17.815
400.00	400.00	400.00	400.00	1.20	1.20	-90.32	-0.17	-30.11	30.11	27.70	2.41	12.509
500.00	500.00	500.00	500.00	1.56	1.56	-90.32	-0.17	-30.11	30.11	26.99	3.12	9.638
600.00	600.00	600.00	600.00	1.92	1.92	-90.32	-0.17	-30.11	30.11	26.27	3.84	7.839
700.00	699.99	699.99	699.99	2.28	2.28	-91.93	-0.17	-30.11	29.89	25.33	4.56	6.559
800.00	799.96	799.96	799.96	2.64	2.64	-96.90	-0.17	-30.11	29.38	24.11	5.27	5.572
900.00	899.86	899.86	899.86	3.00	3.00	-105.44	-0.17	-30.11	29.04	23.05	5.99	4.849
901.66	901.52	901.52	901.52	3.00	3.00	-105.61	-0.17	-30.11	29.04	23.04	6.00	4.839 CC
1,000.00	999.68	999.68	999.68	3.36	3.35	-117.31	-0.17	-30.11	29.66	22.95	6.71	4.421 ES
1,000.15	999.83	999.83	999.83	3.36	3.35	-117.33	-0.17	-30.11	29.66	22.95	6.71	4.420
1,100.00	1,099.43	1,099.43	1,099.43	3.72	3.71	-129.71	-0.17	-30.11	31.82	24.39	7.43	4.282
1,200.00	1,199.19	1,199.19	1,199.19	4.08	4.07	-140.12	-0.17	-30.11	35.25	27.10	8.15	4.324
1,300.00	1,298.94	1,298.94	1,298.94	4.45	4.42	-149.01	0.31	-29.39	38.85	29.98	8.87	4.380
1,400.00	1,398.70	1,398.95	1,399.91	4.82	4.78	-157.55	1.76	-27.20	41.75	32.17	9.58	4.358
1,500.00	1,498.46	1,500.29	1,500.15	5.19	5.13	-166.36	4.17	-23.55	44.15	33.86	10.29	4.290
1,600.00	1,598.21	1,600.52	1,600.20	5.56	5.49	-175.77	7.55	-18.44	46.39	35.38	11.01	4.215
1,700.00	1,697.97	1,700.18	1,699.62	5.93	5.85	-175.03	11.39	-12.63	49.32	37.60	11.72	4.208
1,800.00	1,797.72	1,799.85	1,799.03	6.30	6.21	-167.05	15.22	-6.82	53.36	40.92	12.44	4.290
1,900.00	1,897.48	1,899.51	1,898.45	6.67	6.57	-160.31	19.06	-1.02	58.29	45.13	13.16	4.430
2,000.00	1,997.24	1,999.17	1,997.87	7.04	6.93	-154.68	22.90	4.79	63.89	50.01	13.88	4.603
2,100.00	2,096.99	2,098.83	2,097.29	7.41	7.29	-150.00	26.74	10.60	70.02	55.41	14.60	4.794
2,200.00	2,196.75	2,198.49	2,196.71	7.78	7.65	-146.09	30.58	16.41	76.53	61.20	15.33	4.992
2,300.00	2,296.51	2,298.16	2,296.13	8.15	8.02	-142.81	34.41	22.21	83.35	67.29	16.06	5.191
2,400.00	2,396.26	2,397.82	2,395.55	8.52	8.38	-140.04	38.25	28.02	90.40	73.61	16.79	5.386
2,500.00	2,496.02	2,497.48	2,494.96	8.89	8.75	-137.67	42.09	33.83	97.63	80.11	17.51	5.574
2,600.00	2,595.77	2,597.14	2,594.38	9.26	9.12	-135.63	45.93	39.63	105.01	86.76	18.24	5.756
2,700.00	2,695.53	2,696.81	2,693.80	9.63	9.48	-133.85	49.77	45.44	112.50	93.52	18.97	5.929
2,800.00	2,795.29	2,796.47	2,793.22	10.01	9.85	-132.31	53.61	51.25	120.08	100.38	19.70	6.095
2,900.00	2,895.04	2,896.13	2,892.64	10.38	10.22	-130.94	57.44	57.05	127.75	107.31	20.43	6.252
3,000.00	2,994.80	2,995.79	2,992.06	10.75	10.59	-129.73	61.28	62.86	135.48	114.31	21.17	6.401
3,100.00	3,094.56	3,095.45	3,091.48	11.12	10.95	-128.65	65.12	68.67	143.26	121.36	21.90	6.542
3,200.00	3,194.31	3,195.12	3,190.90	11.49	11.32	-127.69	68.96	74.47	151.09	128.46	22.63	6.677
3,300.00	3,294.07	3,294.78	3,290.31	11.87	11.69	-126.82	72.80	80.28	158.96	135.60	23.36	6.804
3,400.00	3,393.82	3,394.44	3,389.73	12.24	12.06	-126.03	76.63	86.09	166.86	142.77	24.09	6.925
3,500.00	3,493.58	3,494.10	3,489.15	12.61	12.43	-125.31	80.47	91.89	174.79	149.96	24.83	7.041
3,600.00	3,593.34	3,593.76	3,588.57	12.98	12.80	-124.65	84.31	97.70	182.74	157.19	25.56	7.150
3,700.00	3,693.09	3,693.43	3,687.99	13.36	13.17	-124.05	88.15	103.51	190.72	164.43	26.29	7.254
3,800.00	3,792.85	3,793.09	3,787.41	13.73	13.54	-123.50	91.99	109.32	198.72	171.69	27.02	7.353
3,900.00	3,892.61	3,892.75	3,886.83	14.10	13.91	-122.99	95.82	115.12	206.73	178.97	27.76	7.448
4,000.00	3,992.36	3,992.41	3,986.24	14.47	14.28	-122.52	99.66	120.93	214.76	186.27	28.49	7.538
4,100.00	4,092.12	4,092.07	4,085.66	14.85	14.65	-122.08	103.50	126.74	222.80	193.58	29.22	7.624
4,200.00	4,191.87	4,191.74	4,185.08	15.22	15.02	-121.68	107.34	132.54	230.86	200.90	29.96	7.706
4,300.00	4,291.63	4,291.40	4,284.50	15.59	15.39	-121.30	111.18	138.35	238.92	208.23	30.69	7.785
4,400.00	4,391.39	4,391.06	4,383.92	15.96	15.76	-120.94	115.01	144.16	247.00	215.57	31.42	7.860
4,500.00	4,491.14	4,490.72	4,483.34	16.34	16.13	-120.61	118.85	149.96	255.08	222.92	32.16	7.932
4,600.00	4,590.90	4,590.38	4,582.76	16.71	16.50	-120.30	122.69	155.77	263.17	230.28	32.89	8.001
4,700.00	4,690.66	4,690.05	4,682.18	17.08	16.87	-120.01	126.53	161.58	271.27	237.65	33.63	8.067
4,800.00	4,790.41	4,789.71	4,781.59	17.45	17.24	-119.73	130.37	167.38	279.38	245.02	34.36	8.131
4,818.08	4,808.45	4,807.73	4,799.57	17.52	17.31	-119.68	131.06	168.43	280.84	246.35	34.49	8.142

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #204H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWVD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
4,900.00	4,890.22	4,889.41	4,881.05	17.82	17.61	119.34	134.21	173.19	286.87	251.78	35.09	8.175		
5,000.00	4,990.16	4,989.17	4,980.57	18.18	17.98	118.62	138.05	179.01	292.58	256.76	35.82	8.168		
5,084.85	5,075.00	5,073.83	5,065.02	18.48	18.30	117.74	141.31	183.94	296.06	259.62	36.43	8.126		
5,100.00	5,090.15	5,088.94	5,080.10	18.53	18.36	117.56	141.89	184.82	296.57	260.03	36.54	8.116		
5,200.00	5,190.15	5,188.70	5,179.61	18.88	18.73	116.39	145.73	190.63	300.02	262.76	37.26	8.052		
5,300.00	5,290.15	5,288.45	5,279.12	19.23	19.10	115.26	149.57	196.44	303.59	265.62	37.98	7.994		
5,400.00	5,390.15	5,388.21	5,378.63	19.57	19.47	114.15	153.42	202.26	307.28	268.59	38.70	7.941		
5,500.00	5,490.15	5,487.96	5,478.15	19.92	19.84	113.06	157.26	208.07	311.09	271.68	39.41	7.893		
5,600.00	5,590.15	5,587.72	5,577.66	20.27	20.21	112.00	161.10	213.88	315.00	274.87	40.13	7.850		
5,700.00	5,690.15	5,687.48	5,677.17	20.62	20.59	110.97	164.94	219.69	319.02	278.17	40.85	7.810		
5,800.00	5,790.15	5,787.23	5,776.68	20.97	20.96	109.97	168.78	225.51	323.14	281.58	41.56	7.775		
5,900.00	5,890.15	5,886.99	5,876.19	21.32	21.33	108.99	172.62	231.32	327.35	285.08	42.28	7.743		
6,000.00	5,990.15	5,986.74	5,975.71	21.67	21.70	108.03	176.47	237.13	331.66	288.67	42.99	7.714		
6,100.00	6,090.15	6,086.50	6,075.22	22.02	22.07	107.10	180.31	242.94	336.06	292.35	43.71	7.689		
6,200.00	6,190.15	6,186.26	6,174.73	22.37	22.44	106.19	184.15	248.76	340.55	296.13	44.42	7.666		
6,300.00	6,290.15	6,286.01	6,274.24	22.72	22.82	105.31	187.99	254.57	345.12	299.98	45.14	7.646		
6,400.00	6,390.15	6,385.77	6,373.76	23.07	23.19	104.45	191.83	260.38	349.77	303.91	45.85	7.628		
6,500.00	6,490.15	6,485.52	6,473.27	23.42	23.56	103.61	195.67	266.19	354.49	307.92	46.57	7.613		
6,600.00	6,590.15	6,585.28	6,572.78	23.77	23.93	102.80	199.52	272.00	359.29	312.01	47.28	7.599		
6,700.00	6,690.15	6,685.03	6,672.29	24.12	24.30	102.01	203.36	277.82	364.16	316.17	47.99	7.588		
6,800.00	6,790.15	6,784.79	6,771.80	24.47	24.68	101.24	207.20	283.63	369.10	320.39	48.71	7.578		
6,900.00	6,890.15	6,884.55	6,871.32	24.83	25.05	100.48	211.04	289.44	374.10	324.68	49.42	7.570		
7,000.00	6,990.15	6,984.30	6,970.83	25.18	25.42	99.75	214.88	295.25	379.16	329.03	50.13	7.563		
7,100.00	7,090.15	7,084.06	7,070.34	25.53	25.79	99.04	218.73	301.07	384.29	333.44	50.85	7.558		
7,200.00	7,190.15	7,183.81	7,169.85	25.88	26.17	98.35	222.57	306.88	389.47	337.91	51.56	7.554		
7,300.00	7,290.15	7,283.57	7,269.37	26.23	26.54	97.67	226.41	312.69	394.71	342.44	52.27	7.551		
7,400.00	7,390.15	7,383.33	7,368.88	26.59	26.91	97.01	230.25	318.50	400.00	347.02	52.99	7.549		
7,500.00	7,490.15	7,483.08	7,468.39	26.94	27.28	96.37	234.09	324.32	405.35	351.65	53.70	7.548		
7,600.00	7,590.15	7,582.84	7,567.90	27.29	27.65	95.75	237.93	330.13	410.74	356.33	54.41	7.548		
7,700.00	7,690.15	7,682.59	7,667.41	27.65	28.03	95.14	241.78	335.94	416.18	361.05	55.13	7.549		
7,800.00	7,790.15	7,782.35	7,766.93	28.00	28.40	94.55	245.62	341.75	421.67	365.83	55.84	7.551		
7,900.00	7,890.15	7,882.10	7,866.44	28.35	28.77	93.97	249.46	347.57	427.20	370.64	56.55	7.554		
8,000.00	7,990.15	7,981.86	7,965.95	28.71	29.14	93.41	253.30	353.38	432.77	375.50	57.27	7.557		
8,100.00	8,090.15	8,081.62	8,065.46	29.06	29.52	92.87	257.14	359.19	438.38	380.40	57.98	7.561		
8,200.00	8,190.15	8,181.37	8,164.98	29.41	29.89	92.33	260.98	365.00	444.03	385.34	58.69	7.565		
8,300.00	8,290.15	8,281.13	8,264.49	29.77	30.26	91.81	264.83	370.81	449.72	390.31	59.41	7.570		
8,400.00	8,390.15	8,380.88	8,364.00	30.12	30.63	91.31	268.67	376.63	455.44	395.32	60.12	7.575		
8,500.00	8,490.15	8,480.64	8,463.51	30.48	31.00	90.81	272.51	382.44	461.20	400.37	60.83	7.581		
8,600.00	8,590.15	8,580.39	8,563.02	30.83	31.38	90.33	276.35	388.25	466.99	405.45	61.55	7.587		
8,700.00	8,690.15	8,686.43	8,668.83	31.18	31.77	89.86	280.17	394.03	472.46	410.15	62.30	7.583		
8,800.00	8,790.15	8,797.95	8,780.26	31.54	32.17	89.57	282.59	397.69	475.76	412.68	63.07	7.543		
8,900.00	8,890.15	8,907.85	8,890.15	31.89	32.56	89.49	283.24	398.67	476.64	412.83	63.80	7.470		
9,000.00	8,990.15	9,007.85	8,990.15	32.25	32.90	89.49	283.24	398.67	476.64	412.13	64.51	7.389		
9,100.00	9,090.15	9,107.85	9,090.15	32.60	33.24	89.49	283.24	398.67	476.64	411.43	65.21	7.310		
9,200.00	9,190.15	9,207.85	9,190.15	32.96	33.58	89.49	283.24	398.67	476.64	410.73	65.91	7.232		
9,300.00	9,290.15	9,307.85	9,290.15	33.31	33.93	89.49	283.24	398.67	476.64	410.03	66.61	7.155		
9,400.00	9,390.15	9,407.85	9,390.15	33.67	34.27	89.49	283.24	398.67	476.64	409.32	67.32	7.081		
9,500.00	9,490.15	9,507.85	9,490.15	34.02	34.61	89.49	283.24	398.67	476.64	408.62	68.02	7.007		
9,600.00	9,590.15	9,607.85	9,590.15	34.38	34.96	89.49	283.24	398.67	476.64	407.92	68.72	6.936		
9,700.00	9,690.15	9,707.85	9,690.15	34.73	35.30	89.49	283.24	398.67	476.64	407.21	69.43	6.865		
9,800.00	9,790.15	9,807.85	9,790.15	35.09	35.65	89.49	283.24	398.67	476.64	406.51	70.13	6.796		
9,900.00	9,890.15	9,907.85	9,890.15	35.44	35.99	89.49	283.24	398.67	476.64	405.80	70.83	6.729		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #204H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,000.00	9,990.15	10,007.85	9,990.15	35.80	36.34	89.49	283.24	398.67	476.64	405.10	71.54	6.663	
10,100.00	10,090.15	10,107.85	10,090.15	36.15	36.68	89.49	283.24	398.67	476.64	404.39	72.24	6.598	
10,200.00	10,190.15	10,207.85	10,190.15	36.51	37.03	89.49	283.24	398.67	476.64	403.69	72.95	6.534	
10,300.00	10,290.15	10,307.85	10,290.15	36.86	37.38	89.49	283.24	398.67	476.64	402.98	73.65	6.471	
10,400.00	10,390.15	10,407.85	10,390.15	37.22	37.72	89.49	283.24	398.67	476.64	402.28	74.36	6.410	
10,500.00	10,490.15	10,507.85	10,490.15	37.57	38.07	89.49	283.24	398.67	476.64	401.57	75.07	6.350	
10,600.00	10,590.15	10,607.85	10,590.15	37.93	38.42	89.49	283.24	398.67	476.64	400.87	75.77	6.290	
10,700.00	10,690.15	10,707.85	10,690.15	38.29	38.76	89.49	283.24	398.67	476.64	400.16	76.48	6.232	
10,800.00	10,790.15	10,807.85	10,790.15	38.64	39.11	89.49	283.24	398.67	476.64	399.45	77.18	6.175	
10,900.00	10,890.15	10,907.85	10,890.15	39.00	39.46	89.49	283.24	398.67	476.64	398.75	77.89	6.119	
11,000.00	10,990.15	11,007.85	10,990.15	39.35	39.80	89.49	283.24	398.67	476.64	398.04	78.60	6.064	
11,100.00	11,090.15	11,107.85	11,090.15	39.71	40.15	89.49	283.24	398.67	476.64	397.33	79.30	6.010	
11,200.00	11,190.15	11,207.85	11,190.15	40.07	40.50	89.49	283.24	398.67	476.64	396.63	80.01	5.957	
11,300.00	11,290.15	11,307.85	11,290.15	40.42	40.85	89.49	283.24	398.67	476.64	395.92	80.72	5.905	
11,400.00	11,390.15	11,407.85	11,390.15	40.78	41.20	89.49	283.24	398.67	476.64	395.21	81.43	5.854	
11,400.89	11,391.04	11,408.74	11,391.04	40.78	41.20	89.49	283.24	398.67	476.64	395.21	81.43	5.853	
11,450.00	11,440.09	11,457.79	11,440.09	40.94	41.37	89.25	283.24	398.67	477.07	395.30	81.77	5.835	
11,500.00	11,489.66	11,507.36	11,489.66	41.09	41.54	88.49	283.24	398.67	478.45	396.37	82.08	5.829	
11,550.00	11,538.47	11,556.17	11,538.47	41.24	41.71	87.24	283.24	398.67	480.93	398.54	82.39	5.837	
11,600.00	11,586.17	11,603.33	11,586.17	41.37	41.88	85.59	282.68	398.68	484.72	402.05	82.68	5.863	
11,650.00	11,632.38	11,656.63	11,632.38	41.50	42.04	83.98	278.11	398.72	489.78	406.84	82.94	5.906	
11,700.00	11,676.75	11,709.36	11,676.75	41.61	42.19	82.52	268.68	398.80	496.01	412.84	83.17	5.964	
11,750.00	11,718.95	11,763.58	11,718.95	41.72	42.34	81.29	254.06	398.93	503.31	419.95	83.36	6.037	
11,800.00	11,758.65	11,819.37	11,758.65	41.81	42.48	80.32	233.94	399.12	511.58	428.07	83.51	6.126	
11,850.00	11,795.55	11,876.77	11,795.55	41.90	42.61	79.66	208.06	399.35	520.69	437.08	83.60	6.228	
11,900.00	11,829.38	11,935.83	11,829.38	41.99	42.72	79.35	176.22	399.63	530.50	446.86	83.64	6.343	
11,950.00	11,859.87	11,996.55	11,859.87	42.08	42.82	79.41	138.34	399.97	540.87	457.25	83.61	6.469	
12,000.00	11,886.79	12,058.92	11,886.79	42.18	42.91	79.84	94.43	400.37	551.65	468.10	83.55	6.603	
12,050.00	11,909.94	12,122.88	12,050.00	42.28	42.98	80.65	44.68	400.81	562.69	479.23	83.46	6.742	
12,100.00	11,929.14	12,188.34	12,100.00	42.38	43.04	81.82	-10.53	401.31	573.85	490.48	83.37	6.883	
12,150.00	11,944.24	12,255.15	12,150.00	42.49	43.10	83.30	-70.64	401.85	585.00	501.68	83.32	7.021	
12,200.00	11,955.14	12,323.12	12,200.00	42.60	43.19	85.04	-134.84	402.42	596.00	512.67	83.33	7.152	
12,250.00	11,961.74	12,390.29	12,250.00	42.71	43.33	86.78	-200.41	403.01	606.76	523.32	83.44	7.272	
12,300.00	11,964.00	12,449.68	12,300.00	42.82	43.47	87.79	-259.27	403.54	617.69	534.10	83.59	7.390	
12,300.89	11,964.00	12,450.74	12,300.89	42.82	43.47	87.81	-260.32	403.55	617.89	534.30	83.59	7.392	
12,400.00	11,964.00	12,565.62	12,400.00	43.07	43.78	89.49	-375.03	404.57	636.73	552.64	84.09	7.572	
12,500.00	11,964.00	12,664.45	12,500.00	43.38	44.10	89.49	-473.86	405.46	651.35	566.61	84.74	7.686	
12,600.00	11,964.00	12,763.75	12,600.00	43.75	44.47	89.49	-573.16	406.35	662.67	577.19	85.49	7.752	
12,700.00	11,964.00	12,863.40	12,700.00	44.17	44.89	89.49	-672.80	407.24	670.66	584.34	86.32	7.769	
12,800.00	11,964.00	12,963.28	12,800.00	44.64	45.37	89.49	-772.68	408.14	675.29	588.05	87.25	7.740	
12,883.71	11,964.00	13,046.97	12,883.71	45.07	45.81	89.49	-866.37	408.89	676.58	588.49	88.09	7.681	
12,900.00	11,964.00	13,063.26	12,900.00	45.15	45.90	89.49	-872.66	409.03	676.60	588.34	88.26	7.666	
13,000.00	11,964.00	13,163.26	13,000.00	45.72	46.48	89.49	-972.66	409.93	676.73	587.37	89.37	7.573	
13,100.00	11,964.00	13,263.26	13,100.00	46.34	47.11	89.49	-1,072.65	410.83	676.86	586.29	90.58	7.473	
13,200.00	11,964.00	13,363.26	13,200.00	47.01	47.79	89.49	-1,172.65	411.72	676.99	585.11	91.88	7.368	
13,300.00	11,964.00	13,463.26	13,300.00	47.73	48.52	89.49	-1,272.64	412.62	677.12	583.84	93.28	7.259	
13,400.00	11,964.00	13,563.26	13,400.00	48.49	49.29	89.49	-1,372.64	413.52	677.25	582.48	94.77	7.146	
13,500.00	11,964.00	13,663.26	13,500.00	49.30	50.10	89.49	-1,472.64	414.41	677.38	581.04	96.34	7.031	
13,600.00	11,964.00	13,763.26	13,600.00	50.14	50.96	89.49	-1,572.63	415.31	677.51	579.52	98.00	6.914	
13,700.00	11,964.00	13,863.26	13,700.00	51.03	51.85	89.49	-1,672.63	416.21	677.64	577.92	99.73	6.795	
13,800.00	11,964.00	13,963.26	13,800.00	51.95	52.77	89.49	-1,772.62	417.10	677.77	576.25	101.53	6.676	
13,900.00	11,964.00	14,063.26	13,900.00	52.91	53.74	89.49	-1,872.62	418.00	677.90	574.50	103.40	6.556	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #204H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
14,000.00	11,964.00	14,163.26	12,141.00	53.91	54.73	89.49	-1,972.62	418.90	678.03	572.70	105.33	6.437		
14,100.00	11,964.00	14,263.26	12,141.00	54.93	55.76	89.49	-2,072.61	419.79	678.16	570.83	107.33	6.318		
14,200.00	11,964.00	14,363.26	12,141.00	55.99	56.81	89.49	-2,172.61	420.69	678.29	568.91	109.39	6.201		
14,300.00	11,964.00	14,463.26	12,141.00	57.07	57.90	89.49	-2,272.60	421.58	678.42	566.93	111.50	6.085		
14,400.00	11,964.00	14,563.26	12,141.00	58.18	59.01	89.49	-2,372.60	422.48	678.55	564.89	113.66	5.970		
14,500.00	11,964.00	14,663.26	12,141.00	59.32	60.14	89.49	-2,472.59	423.38	678.68	562.81	115.87	5.857		
14,600.00	11,964.00	14,763.26	12,141.00	60.48	61.30	89.49	-2,572.59	424.27	678.81	560.68	118.13	5.746		
14,700.00	11,964.00	14,863.26	12,141.00	61.66	62.48	89.49	-2,672.59	425.17	678.94	558.51	120.43	5.638		
14,800.00	11,964.00	14,963.26	12,141.00	62.86	63.68	89.49	-2,772.58	426.07	679.07	556.30	122.77	5.531		
14,900.00	11,964.00	15,063.26	12,141.00	64.09	64.90	89.49	-2,872.58	426.96	679.20	554.05	125.16	5.427		
15,000.00	11,964.00	15,163.26	12,141.00	65.33	66.14	89.49	-2,972.57	427.86	679.33	551.76	127.57	5.325		
15,100.00	11,964.00	15,263.26	12,141.00	66.59	67.40	89.49	-3,072.57	428.76	679.46	549.44	130.03	5.226		
15,200.00	11,964.00	15,363.26	12,141.00	67.87	68.67	89.49	-3,172.57	429.65	679.59	547.08	132.51	5.129		
15,300.00	11,964.00	15,463.26	12,141.00	69.16	69.96	89.49	-3,272.56	430.55	679.72	544.69	135.03	5.034		
15,400.00	11,964.00	15,563.26	12,141.00	70.47	71.27	89.49	-3,372.56	431.44	679.85	542.28	137.58	4.942		
15,500.00	11,964.00	15,663.26	12,141.00	71.79	72.59	89.49	-3,472.55	432.34	679.99	539.83	140.15	4.852		
15,600.00	11,964.00	15,763.26	12,141.00	73.13	73.92	89.49	-3,572.55	433.24	680.12	537.36	142.75	4.764		
15,700.00	11,964.00	15,863.26	12,141.00	74.47	75.26	89.49	-3,672.55	434.13	680.25	534.87	145.38	4.679		
15,800.00	11,964.00	15,963.26	12,141.00	75.83	76.62	89.49	-3,772.54	435.03	680.38	532.35	148.02	4.596		
15,900.00	11,964.00	16,063.26	12,141.00	77.21	77.99	89.49	-3,872.54	435.93	680.51	529.81	150.69	4.516		
16,000.00	11,964.00	16,163.26	12,141.00	78.59	79.37	89.49	-3,972.53	436.82	680.64	527.25	153.39	4.437		
16,100.00	11,964.00	16,263.26	12,141.00	79.98	80.76	89.49	-4,072.53	437.72	680.77	524.67	156.10	4.361		
16,200.00	11,964.00	16,363.26	12,141.00	81.38	82.16	89.49	-4,172.52	438.62	680.90	522.07	158.83	4.287		
16,300.00	11,964.00	16,463.26	12,141.00	82.80	83.57	89.49	-4,272.52	439.51	681.03	519.45	161.58	4.215		
16,400.00	11,964.00	16,563.26	12,141.00	84.22	84.99	89.49	-4,372.52	440.41	681.16	516.81	164.34	4.145		
16,500.00	11,964.00	16,663.26	12,141.00	85.65	86.41	89.49	-4,472.51	441.31	681.29	514.16	167.13	4.076		
16,600.00	11,964.00	16,763.26	12,141.00	87.08	87.85	89.49	-4,572.51	442.20	681.42	511.49	169.92	4.010		
16,700.00	11,964.00	16,863.26	12,141.00	88.53	89.29	89.49	-4,672.50	443.10	681.55	508.81	172.74	3.946		
16,740.74	11,964.00	16,904.00	12,141.00	89.12	89.88	89.49	-4,713.24	443.46	681.60	507.72	173.88	3.920		
16,741.61	11,964.00	16,904.87	12,141.00	89.14	89.89	89.49	-4,714.11	443.47	681.60	507.69	173.91	3.919 SF		



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #213H - Wellbore #1 - Design #1												Offset Site Error: 0.00 usft	
Survey Program: 0-MWD												Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	-102.98	-277.40	-1,203.63	1,235.21				
100.00	100.00	92.00	92.00	0.13	0.12	-102.98	-277.40	-1,203.63	1,235.18	1,234.93	0.25	5,019.929	
200.00	200.00	192.00	192.00	0.49	0.46	-102.98	-277.40	-1,203.63	1,235.18	1,234.24	0.94	1,307.659	
300.00	300.00	292.00	292.00	0.85	0.82	-102.98	-277.40	-1,203.63	1,235.18	1,233.52	1.66	743.405	
400.00	400.00	392.00	392.00	1.20	1.17	-102.98	-277.40	-1,203.63	1,235.18	1,232.80	2.38	519.319	
500.00	500.00	492.00	492.00	1.56	1.53	-102.98	-277.40	-1,203.63	1,235.18	1,232.08	3.10	399.037	
600.00	600.00	592.00	592.00	1.92	1.89	-102.98	-277.40	-1,203.63	1,235.18	1,231.37	3.81	323.995 CC	
700.00	699.99	685.51	685.51	2.28	2.23	-102.99	-276.87	-1,203.98	1,235.38	1,230.88	4.50	274.276 ES	
800.00	799.96	778.45	778.43	2.64	2.56	-103.02	-275.09	-1,205.16	1,236.07	1,230.88	5.19	238.034	
900.00	899.86	871.40	871.30	3.00	2.89	-103.06	-272.05	-1,207.18	1,237.25	1,231.37	5.88	210.304	
1,000.00	999.68	964.33	964.09	3.36	3.22	-103.12	-267.76	-1,210.03	1,238.93	1,232.35	6.58	188.371	
1,000.15	999.83	964.48	964.23	3.36	3.23	-103.12	-267.75	-1,210.04	1,238.93	1,232.35	6.58	188.341	
1,100.00	1,099.43	1,057.27	1,056.78	3.72	3.56	-103.16	-262.21	-1,213.72	1,241.13	1,233.86	7.28	170.592	
1,200.00	1,199.19	1,156.72	1,155.90	4.08	3.93	-103.13	-255.51	-1,218.17	1,243.66	1,235.65	8.00	155.401	
1,300.00	1,298.94	1,256.68	1,255.54	4.45	4.29	-103.10	-248.78	-1,222.64	1,246.19	1,237.45	8.74	142.658	
1,400.00	1,398.70	1,356.65	1,355.18	4.82	4.66	-103.07	-242.04	-1,227.12	1,248.72	1,239.24	9.47	131.851	
1,500.00	1,498.46	1,456.61	1,454.82	5.19	5.03	-103.05	-235.30	-1,231.59	1,251.24	1,241.04	10.21	122.576	
1,600.00	1,598.21	1,556.58	1,554.46	5.56	5.41	-103.02	-228.57	-1,236.07	1,253.77	1,242.83	10.95	114.535	
1,700.00	1,697.97	1,656.55	1,654.10	5.93	5.78	-102.99	-221.83	-1,240.54	1,256.30	1,244.62	11.69	107.498	
1,800.00	1,797.72	1,756.51	1,753.74	6.30	6.15	-102.96	-215.09	-1,245.02	1,258.83	1,246.41	12.43	101.291	
1,900.00	1,897.48	1,856.48	1,853.37	6.67	6.53	-102.94	-208.36	-1,249.49	1,261.36	1,248.19	13.17	95.776	
2,000.00	1,997.24	1,956.45	1,953.01	7.04	6.90	-102.91	-201.62	-1,253.97	1,263.90	1,249.98	13.91	90.845	
2,100.00	2,096.99	2,056.41	2,052.65	7.41	7.28	-102.88	-194.88	-1,258.44	1,266.43	1,251.77	14.66	86.409	
2,200.00	2,196.75	2,156.38	2,152.29	7.78	7.65	-102.86	-188.14	-1,262.92	1,268.96	1,253.56	15.40	82.400	
2,300.00	2,296.51	2,256.34	2,251.93	8.15	8.03	-102.83	-181.41	-1,267.40	1,271.49	1,255.34	16.14	78.757	
2,400.00	2,396.26	2,356.31	2,351.57	8.52	8.40	-102.80	-174.67	-1,271.87	1,274.02	1,257.13	16.89	75.434	
2,500.00	2,496.02	2,456.28	2,451.20	8.89	8.78	-102.78	-167.93	-1,276.35	1,276.55	1,258.92	17.63	72.391	
2,600.00	2,595.77	2,556.24	2,550.84	9.26	9.16	-102.75	-161.20	-1,280.82	1,279.09	1,260.71	18.38	69.592	
2,700.00	2,695.53	2,656.21	2,650.48	9.63	9.53	-102.72	-154.46	-1,285.30	1,281.62	1,262.49	19.13	67.012	
2,800.00	2,795.29	2,756.17	2,750.12	10.01	9.91	-102.70	-147.72	-1,289.77	1,284.15	1,264.28	19.87	64.624	
2,900.00	2,895.04	2,856.14	2,849.76	10.38	10.29	-102.67	-140.99	-1,294.25	1,286.68	1,266.07	20.62	62.408	
3,000.00	2,994.80	2,956.11	2,949.40	10.75	10.66	-102.65	-134.25	-1,298.72	1,289.22	1,267.85	21.36	60.347	
3,100.00	3,094.56	3,056.07	3,049.04	11.12	11.04	-102.62	-127.51	-1,303.20	1,291.75	1,269.64	22.11	58.424	
3,200.00	3,194.31	3,156.04	3,148.67	11.49	11.42	-102.59	-120.77	-1,307.67	1,294.29	1,271.43	22.86	56.626	
3,300.00	3,294.07	3,256.01	3,248.31	11.87	11.80	-102.57	-114.04	-1,312.15	1,296.82	1,273.22	23.60	54.942	
3,400.00	3,393.82	3,355.97	3,347.95	12.24	12.17	-102.54	-107.30	-1,316.62	1,299.35	1,275.00	24.35	53.361	
3,500.00	3,493.58	3,455.94	3,447.59	12.61	12.55	-102.52	-100.56	-1,321.10	1,301.89	1,276.79	25.10	51.874	
3,600.00	3,593.34	3,555.90	3,547.23	12.98	12.93	-102.49	-93.83	-1,325.57	1,304.42	1,278.58	25.84	50.473	
3,700.00	3,693.09	3,655.87	3,646.87	13.36	13.31	-102.47	-87.09	-1,330.05	1,306.96	1,280.37	26.59	49.150	
3,800.00	3,792.85	3,755.84	3,746.50	13.73	13.68	-102.44	-80.35	-1,334.52	1,309.50	1,282.16	27.34	47.899	
3,900.00	3,892.61	3,855.80	3,846.14	14.10	14.06	-102.42	-73.62	-1,339.00	1,312.03	1,283.95	28.09	46.715	
4,000.00	3,992.36	3,955.77	3,945.78	14.47	14.44	-102.39	-66.88	-1,343.48	1,314.57	1,285.73	28.83	45.592	
4,100.00	4,092.12	4,055.73	4,045.42	14.85	14.82	-102.37	-60.14	-1,347.95	1,317.10	1,287.52	29.58	44.526	
4,200.00	4,191.87	4,155.70	4,145.06	15.22	15.20	-102.34	-53.41	-1,352.43	1,319.64	1,289.31	30.33	43.512	
4,300.00	4,291.63	4,255.67	4,244.70	15.59	15.57	-102.32	-46.67	-1,356.90	1,322.18	1,291.10	31.08	42.547	
4,400.00	4,391.39	4,355.63	4,344.34	15.96	15.95	-102.29	-39.93	-1,361.38	1,324.71	1,292.89	31.82	41.628	
4,500.00	4,491.14	4,455.60	4,443.97	16.34	16.33	-102.27	-33.19	-1,365.85	1,327.25	1,294.68	32.57	40.750	
4,600.00	4,590.90	4,555.57	4,543.61	16.71	16.71	-102.24	-26.46	-1,370.33	1,329.79	1,296.47	33.32	39.912	
4,700.00	4,690.66	4,655.53	4,643.25	17.08	17.09	-102.22	-19.72	-1,374.80	1,332.33	1,298.26	34.07	39.110	
4,800.00	4,790.41	4,755.50	4,742.89	17.45	17.46	-102.19	-12.98	-1,379.28	1,334.86	1,300.05	34.81	38.343	
4,818.08	4,808.45	4,773.57	4,760.90	17.52	17.53	-102.19	-11.77	-1,380.09	1,335.32	1,300.37	34.95	38.208	
4,900.00	4,890.22	4,855.45	4,842.52	17.82	17.84	-102.13	-6.25	-1,383.75	1,337.46	1,301.90	35.56	37.614	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #213H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Distance							Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
5,000.00	4,990.16	4,955.33	4,942.07	18.18	18.22	-101.96	0.48	-1,388.22	1,340.22	1,303.93	36.29	36.930		
5,084.85	5,075.00	5,039.97	5,026.43	18.48	18.54	-101.73	6.19	-1,392.01	1,342.71	1,305.80	36.90	36.384		
5,100.00	5,090.15	5,055.07	5,041.48	18.53	18.60	-101.68	7.21	-1,392.69	1,343.16	1,306.15	37.01	36.289		
5,200.00	5,190.15	5,154.74	5,140.82	18.88	18.97	-101.36	13.92	-1,397.15	1,346.21	1,308.48	37.73	35.680		
5,300.00	5,290.15	5,254.41	5,240.17	19.23	19.35	-101.05	20.64	-1,401.61	1,349.30	1,310.85	38.45	35.094		
5,400.00	5,390.15	5,354.08	5,339.51	19.57	19.73	-100.73	27.36	-1,406.08	1,352.44	1,313.27	39.17	34.530		
5,500.00	5,490.15	5,453.76	5,438.86	19.92	20.10	-100.42	34.07	-1,410.54	1,355.61	1,315.72	39.89	33.987		
5,600.00	5,590.15	5,553.43	5,538.20	20.27	20.48	-100.10	40.79	-1,415.00	1,358.82	1,318.22	40.60	33.465		
5,700.00	5,690.15	5,653.10	5,637.55	20.62	20.86	-99.79	47.51	-1,419.46	1,362.08	1,320.75	41.32	32.961		
5,800.00	5,790.15	5,752.77	5,736.90	20.97	21.24	-99.48	54.23	-1,423.92	1,365.37	1,323.33	42.04	32.476		
5,900.00	5,890.15	5,852.45	5,836.24	21.32	21.61	-99.17	60.94	-1,428.39	1,368.71	1,325.94	42.76	32.007		
6,000.00	5,990.15	5,952.12	5,935.59	21.67	21.99	-98.87	67.66	-1,432.85	1,372.08	1,328.60	43.48	31.555		
6,100.00	6,090.15	6,051.79	6,034.93	22.02	22.37	-98.56	74.38	-1,437.31	1,375.49	1,331.29	44.20	31.119		
6,200.00	6,190.15	6,151.46	6,134.28	22.37	22.75	-98.26	81.09	-1,441.77	1,378.95	1,334.02	44.92	30.697		
6,300.00	6,290.15	6,251.13	6,233.62	22.72	23.12	-97.96	87.81	-1,446.23	1,382.44	1,336.80	45.64	30.289		
6,400.00	6,390.15	6,350.81	6,332.97	23.07	23.50	-97.65	94.53	-1,450.70	1,385.97	1,339.60	46.36	29.895		
6,500.00	6,490.15	6,450.48	6,432.31	23.42	23.88	-97.36	101.25	-1,455.16	1,389.53	1,342.45	47.08	29.513		
6,600.00	6,590.15	6,550.15	6,531.66	23.77	24.25	-97.06	107.96	-1,459.62	1,393.14	1,345.34	47.80	29.144		
6,700.00	6,690.15	6,649.82	6,631.00	24.12	24.63	-96.76	114.68	-1,464.08	1,396.78	1,348.26	48.52	28.787		
6,800.00	6,790.15	6,749.50	6,730.35	24.47	25.01	-96.47	121.40	-1,468.55	1,400.46	1,351.22	49.24	28.440		
6,900.00	6,890.15	6,849.17	6,829.69	24.83	25.39	-96.17	128.11	-1,473.01	1,404.18	1,354.22	49.96	28.104		
7,000.00	6,990.15	6,948.84	6,929.04	25.18	25.76	-95.88	134.83	-1,477.47	1,407.93	1,357.25	50.68	27.779		
7,100.00	7,090.15	7,048.51	7,028.39	25.53	26.14	-95.59	141.55	-1,481.93	1,411.72	1,360.32	51.40	27.463		
7,200.00	7,190.15	7,148.18	7,127.73	25.88	26.52	-95.30	148.27	-1,486.39	1,415.55	1,363.43	52.12	27.157		
7,300.00	7,290.15	7,247.86	7,227.08	26.23	26.89	-95.02	154.98	-1,490.86	1,419.41	1,366.57	52.85	26.860		
7,400.00	7,390.15	7,347.53	7,326.42	26.59	27.27	-94.73	161.70	-1,495.32	1,423.31	1,369.74	53.57	26.571		
7,500.00	7,490.15	7,447.20	7,425.77	26.94	27.65	-94.45	168.42	-1,499.78	1,427.24	1,372.96	54.29	26.291		
7,600.00	7,590.15	7,546.87	7,525.11	27.29	28.03	-94.17	175.13	-1,504.24	1,431.21	1,376.20	55.01	26.018		
7,700.00	7,690.15	7,646.54	7,624.46	27.65	28.40	-93.89	181.85	-1,508.70	1,435.21	1,379.49	55.73	25.754		
7,800.00	7,790.15	7,746.22	7,723.80	28.00	28.78	-93.61	188.57	-1,513.17	1,439.25	1,382.80	56.45	25.496		
7,900.00	7,890.15	7,845.89	7,823.15	28.35	29.16	-93.33	195.29	-1,517.63	1,443.32	1,386.15	57.17	25.246		
8,000.00	7,990.15	7,945.56	7,922.49	28.71	29.54	-93.05	202.00	-1,522.09	1,447.43	1,389.54	57.89	25.003		
8,100.00	8,090.15	8,045.23	8,021.84	29.06	29.91	-92.78	208.72	-1,526.55	1,451.57	1,392.95	58.61	24.766		
8,200.00	8,190.15	8,144.91	8,121.18	29.41	30.29	-92.51	215.44	-1,531.02	1,455.74	1,396.40	59.33	24.535		
8,300.00	8,290.15	8,244.58	8,220.53	29.77	30.67	-92.23	222.15	-1,535.48	1,459.94	1,399.89	60.05	24.311		
8,400.00	8,390.15	8,344.25	8,319.88	30.12	31.05	-91.96	228.87	-1,539.94	1,464.18	1,403.40	60.77	24.092		
8,500.00	8,490.15	8,443.92	8,419.22	30.48	31.42	-91.70	235.59	-1,544.40	1,468.45	1,406.95	61.49	23.879		
8,600.00	8,590.15	8,543.59	8,518.57	30.83	31.80	-91.43	242.31	-1,548.86	1,472.75	1,410.53	62.22	23.672		
8,700.00	8,690.15	8,643.27	8,617.91	31.18	32.18	-91.16	249.02	-1,553.33	1,477.08	1,414.15	62.94	23.470		
8,800.00	8,790.15	8,744.08	8,718.40	31.54	32.56	-90.90	255.81	-1,557.84	1,481.45	1,417.78	63.66	23.271		
8,900.00	8,890.15	8,870.55	8,844.61	31.89	33.03	-90.64	262.45	-1,562.24	1,484.86	1,420.38	64.48	23.027		
9,000.00	8,990.15	8,997.41	8,971.40	32.25	33.48	-90.52	265.60	-1,564.34	1,486.49	1,421.21	65.28	22.771		
9,100.00	9,090.15	9,108.16	9,082.15	32.60	33.85	-90.51	265.88	-1,564.52	1,486.64	1,420.63	66.01	22.522		
9,200.00	9,190.15	9,208.16	9,182.15	32.96	34.19	-90.51	265.88	-1,564.52	1,486.64	1,419.93	66.71	22.287		
9,300.00	9,290.15	9,308.16	9,282.15	33.31	34.53	-90.51	265.88	-1,564.52	1,486.64	1,419.23	67.40	22.056		
9,400.00	9,390.15	9,408.16	9,382.15	33.67	34.87	-90.51	265.88	-1,564.52	1,486.64	1,418.54	68.10	21.830		
9,500.00	9,490.15	9,508.16	9,482.15	34.02	35.21	-90.51	265.88	-1,564.52	1,486.64	1,417.84	68.80	21.608		
9,600.00	9,590.15	9,608.16	9,582.15	34.38	35.55	-90.51	265.88	-1,564.52	1,486.64	1,417.14	69.50	21.391		
9,700.00	9,690.15	9,708.16	9,682.15	34.73	35.90	-90.51	265.88	-1,564.52	1,486.64	1,416.44	70.20	21.178		
9,800.00	9,790.15	9,808.16	9,782.15	35.09	36.24	-90.51	265.88	-1,564.52	1,486.64	1,415.74	70.90	20.969		
9,900.00	9,890.15	9,908.16	9,882.15	35.44	36.58	-90.51	265.88	-1,564.52	1,486.64	1,415.04	71.60	20.764		
10,000.00	9,990.15	10,008.16	9,982.15	35.80	36.92	-90.51	265.88	-1,564.52	1,486.64	1,414.34	72.30	20.563		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #213H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,100.00	10,090.15	10,108.16	10,082.15	36.15	37.26	-90.51	265.88	-1,564.52	1,486.64	1,413.64	73.00	20.366	
10,200.00	10,190.15	10,208.16	10,182.15	36.51	37.61	-90.51	265.88	-1,564.52	1,486.64	1,412.94	73.70	20.172	
10,300.00	10,290.15	10,308.16	10,282.15	36.86	37.95	-90.51	265.88	-1,564.52	1,486.64	1,412.24	74.40	19.982	
10,400.00	10,390.15	10,408.16	10,382.15	37.22	38.29	-90.51	265.88	-1,564.52	1,486.64	1,411.54	75.10	19.796	
10,500.00	10,490.15	10,508.16	10,482.15	37.57	38.64	-90.51	265.88	-1,564.52	1,486.64	1,410.83	75.80	19.612	
10,600.00	10,590.15	10,608.16	10,582.15	37.93	38.98	-90.51	265.88	-1,564.52	1,486.64	1,410.13	76.50	19.432	
10,700.00	10,690.15	10,708.16	10,682.15	38.29	39.32	-90.51	265.88	-1,564.52	1,486.64	1,409.43	77.21	19.256	
10,800.00	10,790.15	10,808.16	10,782.15	38.64	39.67	-90.51	265.88	-1,564.52	1,486.64	1,408.73	77.91	19.082	
10,900.00	10,890.15	10,908.16	10,882.15	39.00	40.01	-90.51	265.88	-1,564.52	1,486.64	1,408.03	78.61	18.911	
11,000.00	10,990.15	11,008.16	10,982.15	39.35	40.36	-90.51	265.88	-1,564.52	1,486.64	1,407.32	79.31	18.744	
11,100.00	11,090.15	11,108.16	11,082.15	39.71	40.70	-90.51	265.88	-1,564.52	1,486.64	1,406.62	80.02	18.579	
11,200.00	11,190.15	11,208.16	11,182.15	40.07	41.05	-90.51	265.88	-1,564.52	1,486.64	1,405.92	80.72	18.417	
11,300.00	11,290.15	11,308.16	11,282.15	40.42	41.39	-90.51	265.88	-1,564.52	1,486.64	1,405.21	81.42	18.258	
11,400.00	11,390.15	11,408.16	11,382.15	40.78	41.74	-90.51	265.88	-1,564.52	1,486.64	1,404.51	82.13	18.102	
11,400.89	11,391.04	11,409.05	11,383.04	40.78	41.74	-90.51	265.88	-1,564.52	1,486.64	1,404.50	82.13	18.100	
11,450.00	11,440.09	11,458.10	11,432.09	40.94	41.91	-90.43	265.88	-1,564.52	1,486.21	1,403.74	82.47	18.022	
11,500.00	11,489.66	11,507.66	11,481.66	41.09	42.08	-90.18	265.88	-1,564.52	1,484.92	1,402.14	82.78	17.937	
11,550.00	11,538.47	11,556.48	11,530.47	41.24	42.25	-89.78	265.88	-1,564.52	1,482.83	1,399.75	83.09	17.847	
11,600.00	11,586.17	11,604.17	11,578.17	41.37	42.42	-89.21	265.88	-1,564.52	1,480.05	1,396.68	83.38	17.752	
11,650.00	11,632.38	11,650.38	11,624.38	41.50	42.58	-88.48	265.88	-1,564.52	1,476.72	1,393.08	83.65	17.654	
11,700.00	11,676.75	11,694.75	11,668.75	41.61	42.73	-87.60	265.88	-1,564.52	1,473.02	1,389.12	83.90	17.556	
11,750.00	11,718.95	11,736.95	11,710.95	41.72	42.88	-86.57	265.88	-1,564.52	1,469.15	1,385.01	84.14	17.460	
11,800.00	11,758.65	11,776.65	11,750.65	41.81	43.01	-85.39	265.88	-1,564.52	1,465.35	1,380.98	84.37	17.369	
11,850.00	11,795.55	11,813.56	11,787.55	41.90	43.14	-84.08	265.88	-1,564.52	1,461.85	1,377.28	84.57	17.285	
11,900.00	11,829.38	11,847.38	11,821.38	41.99	43.26	-82.64	265.88	-1,564.52	1,458.91	1,374.15	84.76	17.212	
11,950.00	11,859.87	11,877.87	11,851.87	42.08	43.37	-81.08	265.88	-1,564.52	1,456.78	1,371.84	84.94	17.151	
12,000.00	11,886.79	11,923.86	11,897.82	42.18	43.51	-79.48	264.51	-1,564.52	1,455.57	1,370.43	85.13	17.097	
12,050.00	11,909.94	11,982.10	11,955.62	42.28	43.67	-78.00	257.54	-1,564.47	1,455.06	1,369.75	85.31	17.057	
12,063.32	11,915.45	11,999.41	11,972.63	42.31	43.72	-77.65	254.34	-1,564.45	1,455.04	1,369.69	85.35	17.049	
12,100.00	11,929.14	12,052.36	12,023.95	42.38	43.85	-76.81	241.39	-1,564.37	1,455.19	1,369.77	85.42	17.036	
12,150.00	11,944.24	12,142.04	12,107.42	42.49	44.04	-76.17	208.86	-1,564.16	1,455.76	1,370.37	85.39	17.048	
12,200.00	11,955.14	12,234.92	12,187.17	42.60	44.18	-76.06	161.49	-1,563.86	1,456.19	1,370.97	85.22	17.088	
12,250.00	11,961.74	12,441.07	12,331.46	42.71	44.35	-79.79	15.94	-1,562.94	1,455.51	1,371.13	84.38	17.249	
12,300.00	11,964.00	12,689.73	12,423.42	42.82	44.36	-87.12	-212.98	-1,561.49	1,451.31	1,367.62	83.68	17.343	
12,300.89	11,964.00	12,671.88	12,419.98	42.82	44.36	-86.35	-195.48	-1,561.60	1,451.14	1,367.43	83.71	17.336	
12,400.00	11,964.00	12,866.59	12,437.00	43.07	44.48	-90.36	-389.08	-1,560.38	1,436.31	1,352.46	83.85	17.129	
12,500.00	11,964.00	12,965.46	12,437.00	43.38	44.67	-90.36	-487.95	-1,559.75	1,422.23	1,338.01	84.22	16.888	
12,600.00	11,964.00	13,064.79	12,437.00	43.75	44.92	-90.36	-587.28	-1,559.12	1,411.42	1,326.72	84.70	16.664	
12,700.00	11,964.00	13,164.47	12,437.00	44.17	45.23	-90.36	-686.95	-1,558.49	1,403.88	1,318.57	85.31	16.456	
12,800.00	11,964.00	13,264.36	12,437.00	44.64	45.60	-90.36	-786.84	-1,557.86	1,399.62	1,313.58	86.04	16.267	
12,880.02	11,964.00	13,344.37	12,437.00	45.05	45.93	-90.36	-866.85	-1,557.35	1,398.57	1,311.85	86.72	16.128	
12,883.71	11,964.00	13,348.06	12,437.00	45.07	45.94	-90.36	-870.53	-1,557.33	1,398.57	1,311.82	86.75	16.122	
12,900.00	11,964.00	13,364.35	12,437.00	45.15	46.02	-90.36	-886.83	-1,557.23	1,398.59	1,311.69	86.90	16.095	
13,000.00	11,964.00	13,464.35	12,437.00	45.72	46.49	-90.36	-986.82	-1,556.60	1,398.71	1,310.85	87.86	15.920	
13,100.00	11,964.00	13,564.35	12,437.00	46.34	47.01	-90.36	-1,086.82	-1,555.96	1,398.83	1,309.91	88.93	15.730	
13,200.00	11,964.00	13,664.35	12,437.00	47.01	47.58	-90.36	-1,186.82	-1,555.33	1,398.95	1,308.86	90.09	15.528	
13,300.00	11,964.00	13,764.35	12,437.00	47.73	48.20	-90.36	-1,286.82	-1,554.70	1,399.07	1,307.73	91.35	15.316	
13,400.00	11,964.00	13,864.35	12,437.00	48.49	48.87	-90.36	-1,386.82	-1,554.06	1,399.19	1,306.50	92.69	15.095	
13,500.00	11,964.00	13,964.35	12,437.00	49.30	49.58	-90.36	-1,486.81	-1,553.43	1,399.32	1,305.19	94.13	14.866	
13,600.00	11,964.00	14,064.35	12,437.00	50.14	50.34	-90.36	-1,586.81	-1,552.80	1,399.44	1,303.79	95.64	14.632	
13,700.00	11,964.00	14,164.35	12,437.00	51.03	51.14	-90.36	-1,686.81	-1,552.16	1,399.56	1,302.32	97.24	14.393	
13,800.00	11,964.00	14,264.35	12,437.00	51.95	51.97	-90.36	-1,786.81	-1,551.53	1,399.68	1,300.77	98.91	14.152	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #213H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference	Offset		Semi Major Axis		Distance		Minimum Separation		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,900.00	11,964.00	14,364.35	12,437.00	52.91	52.85	-90.36	-1,886.81	-1,550.90	1,399.80	1,299.15	100.65	13.908		
14,000.00	11,964.00	14,464.35	12,437.00	53.91	53.76	-90.36	-1,986.80	-1,550.27	1,399.92	1,297.47	102.45	13.664		
14,100.00	11,964.00	14,564.35	12,437.00	54.93	54.71	-90.36	-2,086.80	-1,549.63	1,400.04	1,295.72	104.32	13.420		
14,200.00	11,964.00	14,664.35	12,437.00	55.99	55.69	-90.36	-2,186.80	-1,549.00	1,400.16	1,293.91	106.26	13.177		
14,300.00	11,964.00	14,764.35	12,437.00	57.07	56.70	-90.36	-2,286.80	-1,548.37	1,400.28	1,292.04	108.24	12.936		
14,400.00	11,964.00	14,864.35	12,437.00	58.18	57.74	-90.36	-2,386.79	-1,547.73	1,400.40	1,290.12	110.29	12.698		
14,500.00	11,964.00	14,964.35	12,437.00	59.32	58.80	-90.36	-2,486.79	-1,547.10	1,400.52	1,288.14	112.38	12.462		
14,600.00	11,964.00	15,064.35	12,437.00	60.48	59.90	-90.36	-2,586.79	-1,546.47	1,400.64	1,286.12	114.52	12.230		
14,700.00	11,964.00	15,164.35	12,437.00	61.66	61.02	-90.36	-2,686.79	-1,545.84	1,400.77	1,284.05	116.71	12.002		
14,800.00	11,964.00	15,264.35	12,437.00	62.86	62.16	-90.36	-2,786.79	-1,545.20	1,400.89	1,281.94	118.94	11.778		
14,900.00	11,964.00	15,364.35	12,437.00	64.09	63.33	-90.36	-2,886.78	-1,544.57	1,401.01	1,279.79	121.22	11.558		
15,000.00	11,964.00	15,464.35	12,437.00	65.33	64.51	-90.36	-2,986.78	-1,543.94	1,401.13	1,277.60	123.53	11.343		
15,100.00	11,964.00	15,564.35	12,437.00	66.59	65.72	-90.36	-3,086.78	-1,543.30	1,401.25	1,275.37	125.88	11.132		
15,200.00	11,964.00	15,664.35	12,437.00	67.87	66.94	-90.36	-3,186.78	-1,542.67	1,401.37	1,273.11	128.26	10.926		
15,300.00	11,964.00	15,764.35	12,437.00	69.16	68.19	-90.36	-3,286.78	-1,542.04	1,401.49	1,270.82	130.67	10.725		
15,400.00	11,964.00	15,864.35	12,437.00	70.47	69.45	-90.36	-3,386.77	-1,541.40	1,401.61	1,268.49	133.12	10.529		
15,500.00	11,964.00	15,964.35	12,437.00	71.79	70.72	-90.36	-3,486.77	-1,540.77	1,401.73	1,266.14	135.59	10.338		
15,600.00	11,964.00	16,064.35	12,437.00	73.13	72.02	-90.36	-3,586.77	-1,540.14	1,401.85	1,263.76	138.10	10.151		
15,700.00	11,964.00	16,164.35	12,437.00	74.47	73.32	-90.36	-3,686.77	-1,539.51	1,401.97	1,261.35	140.63	9.970		
15,800.00	11,964.00	16,264.35	12,437.00	75.83	74.64	-90.36	-3,786.77	-1,538.87	1,402.09	1,258.91	143.18	9.793		
15,900.00	11,964.00	16,364.35	12,437.00	77.21	75.98	-90.36	-3,886.76	-1,538.24	1,402.22	1,256.46	145.76	9.620		
16,000.00	11,964.00	16,464.35	12,437.00	78.59	77.32	-90.36	-3,986.76	-1,537.61	1,402.34	1,253.98	148.36	9.452		
16,100.00	11,964.00	16,564.35	12,437.00	79.98	78.68	-90.36	-4,086.76	-1,536.97	1,402.46	1,251.48	150.98	9.289		
16,200.00	11,964.00	16,664.35	12,437.00	81.38	80.05	-90.36	-4,186.76	-1,536.34	1,402.58	1,248.96	153.62	9.130		
16,300.00	11,964.00	16,764.35	12,437.00	82.80	81.42	-90.36	-4,286.76	-1,535.71	1,402.70	1,246.42	156.28	8.976		
16,400.00	11,964.00	16,864.35	12,437.00	84.22	82.81	-90.36	-4,386.75	-1,535.08	1,402.82	1,243.87	158.95	8.825		
16,500.00	11,964.00	16,964.35	12,437.00	85.65	84.21	-90.36	-4,486.75	-1,534.44	1,402.94	1,241.29	161.65	8.679		
16,600.00	11,964.00	17,064.35	12,437.00	87.08	85.62	-90.36	-4,586.75	-1,533.81	1,403.06	1,238.70	164.36	8.537		
16,700.00	11,964.00	17,164.35	12,437.00	88.53	87.03	-90.36	-4,686.75	-1,533.18	1,403.18	1,236.09	167.09	8.398		
16,740.74	11,964.00	17,205.09	12,437.00	89.12	87.61	-90.36	-4,727.49	-1,532.92	1,403.23	1,235.03	168.20	8.343		
16,741.61	11,964.00	17,205.28	12,437.00	89.14	87.61	-90.33	-4,727.68	-1,532.92	1,403.23	1,235.01	168.22	8.342 SF		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #214H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Distance		Minimum Separation		Separation Factor		Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	1.00	1.00	0.00	0.00	-90.38	-0.39	-60.10	60.10	59.84	0.26	231.238		
100.00	100.00	101.00	101.00	0.13	0.13	-90.38	-0.39	-60.10	60.10	59.12	0.98	61.522		
200.00	200.00	201.00	201.00	0.49	0.49	-90.38	-0.39	-60.10	60.10	58.40	1.69	35.481		
300.00	300.00	301.00	301.00	0.85	0.85	-90.38	-0.39	-60.10	60.10	57.69	2.41	24.929		
400.00	400.00	401.00	401.00	1.20	1.21	-90.38	-0.39	-60.10	60.10	56.97	3.13	19.215		
500.00	500.00	501.00	501.00	1.56	1.57	-90.38	-0.39	-60.10	60.10	56.85	3.24	18.521 CC		
516.33	516.33	517.33	517.33	1.62	1.62	-90.38	-0.39	-60.10	60.10	56.25	3.84	15.632		
600.00	600.00	600.99	600.99	1.92	1.92	-90.38	-0.39	-60.10	60.10	55.81	4.56	13.247 ES		
700.00	699.99	700.40	700.40	2.28	2.28	-90.49	0.33	-60.60	60.37	55.89	5.27	11.608		
800.00	799.96	800.00	799.96	2.64	2.63	-90.83	2.47	-62.09	61.16	56.50	5.98	10.447		
900.00	899.86	899.20	899.07	3.00	2.99	-91.41	6.02	-64.55	62.48	57.64	6.70	9.607		
1,000.00	999.68	998.58	998.26	3.36	3.35	-92.19	10.99	-68.00	64.33	57.64	6.70	9.606		
1,000.15	999.83	998.74	998.42	3.36	3.35	-92.19	11.00	-68.00	64.34	59.05	7.42	8.958		
1,100.00	1,099.43	1,098.55	1,097.99	3.72	3.71	-92.98	16.71	-71.97	66.47	60.47	8.15	8.422		
1,200.00	1,199.19	1,198.52	1,197.72	4.08	4.08	-93.72	22.44	-75.94	68.62	61.90	8.88	7.972		
1,300.00	1,298.94	1,298.50	1,297.45	4.45	4.44	-94.41	28.16	-79.91	70.78	63.34	9.61	7.591		
1,400.00	1,398.70	1,398.47	1,397.18	4.82	4.81	-95.07	33.88	-83.89	72.95	64.78	10.34	7.263		
1,500.00	1,498.46	1,498.44	1,496.91	5.19	5.18	-95.69	39.61	-87.86	75.13	66.23	11.08	6.978		
1,600.00	1,598.21	1,598.42	1,596.64	5.56	5.55	-96.27	45.33	-91.83	77.31	67.69	11.82	6.729		
1,700.00	1,697.97	1,698.39	1,696.37	5.93	5.92	-96.82	51.05	-95.80	79.51	69.16	12.55	6.509		
1,800.00	1,797.72	1,798.36	1,796.10	6.30	6.29	-97.34	56.78	-99.77	81.71	70.62	13.29	6.313		
1,900.00	1,897.48	1,898.34	1,895.83	6.67	6.66	-97.83	62.50	-103.75	83.92	72.10	14.03	6.138		
2,000.00	1,997.24	1,998.31	1,995.56	7.04	7.03	-98.30	68.22	-107.72	86.13	73.58	14.77	5.981		
2,100.00	2,096.99	2,098.28	2,095.29	7.41	7.40	-98.74	73.95	-111.69	88.35	75.06	15.51	5.839		
2,200.00	2,196.75	2,198.26	2,195.02	7.78	7.77	-99.17	79.67	-115.66	90.57	76.55	16.25	5.710		
2,300.00	2,296.51	2,298.23	2,294.75	8.15	8.14	-99.57	85.40	-119.63	92.80	78.04	16.99	5.593		
2,400.00	2,396.26	2,398.20	2,394.48	8.52	8.51	-99.95	91.12	-123.61	95.04	79.54	17.73	5.485		
2,500.00	2,496.02	2,498.17	2,494.21	8.89	8.88	-100.32	96.84	-127.58	97.27	81.04	18.48	5.386		
2,600.00	2,595.77	2,598.15	2,593.94	9.26	9.26	-100.67	102.57	-131.55	99.51	82.54	19.22	5.295		
2,700.00	2,695.53	2,698.12	2,693.67	9.63	9.63	-101.00	108.29	-135.52	101.76	84.05	19.96	5.210		
2,800.00	2,795.29	2,798.09	2,793.40	10.01	10.00	-101.32	114.01	-139.49	104.01	85.55	20.70	5.132		
2,900.00	2,895.04	2,898.07	2,893.13	10.38	10.37	-101.63	119.74	-143.47	106.26	87.06	21.45	5.060		
3,000.00	2,994.80	2,998.04	2,992.86	10.75	10.74	-101.92	125.46	-147.44	108.51	88.58	22.19	4.992		
3,100.00	3,094.56	3,098.01	3,092.59	11.12	11.12	-102.20	131.18	-151.41	110.77	90.09	22.93	4.929		
3,200.00	3,194.31	3,197.99	3,192.32	11.49	11.49	-102.47	136.91	-155.38	113.03	91.61	23.68	4.869		
3,300.00	3,294.07	3,297.96	3,292.05	11.87	11.86	-102.73	142.63	-159.35	115.29	93.13	24.42	4.814		
3,400.00	3,393.82	3,397.93	3,391.78	12.24	12.23	-102.98	148.35	-163.33	117.55	94.66	25.16	4.762		
3,500.00	3,493.58	3,497.91	3,491.51	12.61	12.61	-103.22	154.08	-167.30	119.82	96.18	25.91	4.713		
3,600.00	3,593.34	3,597.88	3,591.24	12.98	12.98	-103.45	159.80	-171.27	122.09	97.71	26.65	4.666		
3,700.00	3,693.09	3,697.85	3,690.97	13.36	13.35	-103.67	165.52	-175.24	124.36	99.23	27.39	4.622		
3,800.00	3,792.85	3,797.82	3,790.70	13.73	13.72	-103.89	171.25	-179.22	126.63	100.76	28.14	4.581		
3,900.00	3,892.61	3,897.80	3,890.43	14.10	14.10	-104.09	176.97	-183.19	128.90	102.29	28.88	4.542		
4,000.00	3,992.36	3,997.77	3,990.16	14.47	14.47	-104.29	182.69	-187.16	131.18	103.83	29.63	4.504		
4,100.00	4,092.12	4,097.74	4,089.89	14.85	14.84	-104.49	188.42	-191.13	133.45	105.36	30.37	4.469		
4,200.00	4,191.87	4,197.72	4,189.62	15.22	15.22	-104.67	194.14	-195.10	135.73	106.90	31.12	4.435		
4,300.00	4,291.63	4,297.69	4,289.35	15.59	15.59	-104.85	199.86	-199.08	138.01	108.43	31.86	4.403		
4,400.00	4,391.39	4,397.66	4,389.08	15.96	15.96	-105.03	205.59	-203.05	140.29	109.97	32.60	4.373		
4,500.00	4,491.14	4,497.64	4,488.81	16.34	16.33	-105.20	211.31	-207.02	142.58	111.51	33.35	4.344		
4,600.00	4,590.90	4,597.61	4,588.54	16.71	16.71	-105.36	217.03	-210.99	144.86	113.05	34.09	4.316		
4,700.00	4,690.66	4,697.58	4,688.27	17.08	17.08	-105.52	222.76	-214.96	147.14	114.59	34.84	4.289		
4,800.00	4,790.41	4,797.56	4,788.00	17.45	17.45	-105.67	228.48	-218.94	149.43	114.87	34.97	4.284		
4,818.08	4,808.45	4,815.63	4,806.03	17.52	17.52	-105.70	229.52	-219.65	149.84					

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #214H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference	Offset		Semi Major Axis		Distance		Minimum Separation		Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
4,900.00	4,890.22	4,897.53	4,887.73	17.82	17.83	-105.49	234.20	-222.91	151.72	116.14	35.58	4.264	
5,000.00	4,990.16	4,997.45	4,987.41	18.18	18.20	-104.36	239.92	-226.88	154.04	117.74	36.30	4.243	
5,084.85	5,075.00	5,082.15	5,071.90	18.48	18.51	-102.67	244.77	-230.24	156.15	119.25	36.90	4.232	
5,100.00	5,090.15	5,097.26	5,086.98	18.53	18.57	-102.32	245.64	-230.84	156.56	119.55	37.01	4.230	
5,200.00	5,190.15	5,197.02	5,186.49	18.88	18.94	-100.01	251.35	-234.81	159.35	121.65	37.71	4.226	
5,300.00	5,290.15	5,296.78	5,286.01	19.23	19.32	-97.78	257.06	-238.77	162.40	124.00	38.40	4.229	
5,400.00	5,390.15	5,396.53	5,385.52	19.57	19.69	-95.63	262.77	-242.73	165.68	126.59	39.10	4.238	
5,500.00	5,490.15	5,496.29	5,485.03	19.92	20.06	-93.57	268.48	-246.70	169.19	129.40	39.79	4.252	
5,600.00	5,590.15	5,597.97	5,586.51	20.27	20.44	-91.78	273.65	-250.29	172.49	131.99	40.50	4.259	
5,700.00	5,690.15	5,700.47	5,688.95	20.62	20.80	-90.77	276.68	-252.39	174.47	133.27	41.20	4.235	
5,800.00	5,790.15	5,802.68	5,791.15	20.97	21.16	-90.51	277.48	-252.94	175.00	133.10	41.90	4.177	
5,900.00	5,890.15	5,902.68	5,891.15	21.32	21.51	-90.51	277.48	-252.94	175.00	132.40	42.60	4.108	
6,000.00	5,990.15	6,002.68	5,991.15	21.67	21.85	-90.51	277.48	-252.94	175.00	131.71	43.29	4.042	
6,100.00	6,090.15	6,102.68	6,091.15	22.02	22.20	-90.51	277.48	-252.94	175.00	131.01	43.99	3.978	
6,200.00	6,190.15	6,202.68	6,191.15	22.37	22.54	-90.51	277.48	-252.94	175.00	130.31	44.69	3.916	
6,300.00	6,290.15	6,302.68	6,291.15	22.72	22.89	-90.51	277.48	-252.94	175.00	129.61	45.39	3.856	
6,400.00	6,390.15	6,402.68	6,391.15	23.07	23.24	-90.51	277.48	-252.94	175.00	128.91	46.09	3.797	
6,500.00	6,490.15	6,502.68	6,491.15	23.42	23.58	-90.51	277.48	-252.94	175.00	128.21	46.79	3.740	
6,600.00	6,590.15	6,602.68	6,591.15	23.77	23.93	-90.51	277.48	-252.94	175.00	127.51	47.49	3.685	
6,700.00	6,690.15	6,702.68	6,691.15	24.12	24.28	-90.51	277.48	-252.94	175.00	126.81	48.19	3.631	
6,800.00	6,790.15	6,802.68	6,791.15	24.47	24.63	-90.51	277.48	-252.94	175.00	126.11	48.89	3.579	
6,900.00	6,890.15	6,902.68	6,891.15	24.83	24.98	-90.51	277.48	-252.94	175.00	125.41	49.59	3.529	
7,000.00	6,990.15	7,002.68	6,991.15	25.18	25.32	-90.51	277.48	-252.94	175.00	124.70	50.30	3.479	
7,100.00	7,090.15	7,102.68	7,091.15	25.53	25.67	-90.51	277.48	-252.94	175.00	124.00	51.00	3.431	
7,200.00	7,190.15	7,202.68	7,191.15	25.88	26.02	-90.51	277.48	-252.94	175.00	123.30	51.70	3.385	
7,300.00	7,290.15	7,302.68	7,291.15	26.23	26.37	-90.51	277.48	-252.94	175.00	122.59	52.41	3.339	
7,400.00	7,390.15	7,402.68	7,391.15	26.59	26.72	-90.51	277.48	-252.94	175.00	121.89	53.11	3.295	
7,500.00	7,490.15	7,502.68	7,491.15	26.94	27.07	-90.51	277.48	-252.94	175.00	121.19	53.81	3.252	
7,600.00	7,590.15	7,602.68	7,591.15	27.29	27.42	-90.51	277.48	-252.94	175.00	120.48	54.52	3.210	
7,700.00	7,690.15	7,702.68	7,691.15	27.65	27.77	-90.51	277.48	-252.94	175.00	119.78	55.22	3.169	
7,800.00	7,790.15	7,802.68	7,791.15	28.00	28.12	-90.51	277.48	-252.94	175.00	119.07	55.93	3.129	
7,900.00	7,890.15	7,902.68	7,891.15	28.35	28.47	-90.51	277.48	-252.94	175.00	118.37	56.63	3.090	
8,000.00	7,990.15	8,002.68	7,991.15	28.71	28.82	-90.51	277.48	-252.94	175.00	117.66	57.34	3.052	
8,100.00	8,090.15	8,102.68	8,091.15	29.06	29.18	-90.51	277.48	-252.94	175.00	116.95	58.05	3.015	
8,200.00	8,190.15	8,202.68	8,191.15	29.41	29.53	-90.51	277.48	-252.94	175.00	116.25	58.75	2.979	
8,300.00	8,290.15	8,302.68	8,291.15	29.77	29.88	-90.51	277.48	-252.94	175.00	115.54	59.46	2.943	
8,400.00	8,390.15	8,402.68	8,391.15	30.12	30.23	-90.51	277.48	-252.94	175.00	114.83	60.17	2.909	
8,500.00	8,490.15	8,502.68	8,491.15	30.48	30.58	-90.51	277.48	-252.94	175.00	114.13	60.87	2.875	
8,600.00	8,590.15	8,602.68	8,591.15	30.83	30.93	-90.51	277.48	-252.94	175.00	113.42	61.58	2.842	
8,700.00	8,690.15	8,702.68	8,691.15	31.18	31.29	-90.51	277.48	-252.94	175.00	112.71	62.29	2.810	
8,800.00	8,790.15	8,802.68	8,791.15	31.54	31.64	-90.51	277.48	-252.94	175.00	112.00	63.00	2.778	
8,900.00	8,890.15	8,902.68	8,891.15	31.89	31.99	-90.51	277.48	-252.94	175.00	111.30	63.70	2.747	
9,000.00	8,990.15	9,002.68	8,991.15	32.25	32.34	-90.51	277.48	-252.94	175.00	110.59	64.41	2.717	
9,100.00	9,090.15	9,102.68	9,091.15	32.60	32.70	-90.51	277.48	-252.94	175.00	109.88	65.12	2.687	
9,200.00	9,190.15	9,202.68	9,191.15	32.96	33.05	-90.51	277.48	-252.94	175.00	109.17	65.83	2.658	
9,300.00	9,290.15	9,302.68	9,291.15	33.31	33.40	-90.51	277.48	-252.94	175.00	108.46	66.54	2.630	
9,400.00	9,390.15	9,402.68	9,391.15	33.67	33.76	-90.51	277.48	-252.94	175.00	107.75	67.25	2.602	
9,500.00	9,490.15	9,502.68	9,491.15	34.02	34.11	-90.51	277.48	-252.94	175.00	107.04	67.96	2.575	
9,600.00	9,590.15	9,602.68	9,591.15	34.38	34.46	-90.51	277.48	-252.94	175.00	106.33	68.67	2.549	
9,700.00	9,690.15	9,702.68	9,691.15	34.73	34.82	-90.51	277.48	-252.94	175.00	105.63	69.37	2.523	
9,800.00	9,790.15	9,802.68	9,791.15	35.09	35.17	-90.51	277.48	-252.94	175.00	104.92	70.08	2.497	
9,900.00	9,890.15	9,902.68	9,891.15	35.44	35.52	-90.51	277.48	-252.94	175.00	104.21	70.79	2.472	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #214H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (")	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
10,000.00	9,990.15	10,002.68	9,991.15	35.80	35.88	-90.51	277.48	-252.94	175.00	103.50	71.50	2.447		
10,100.00	10,090.15	10,102.68	10,091.15	36.15	36.23	-90.51	277.48	-252.94	175.00	102.79	72.21	2.423		
10,200.00	10,190.15	10,202.68	10,191.15	36.51	36.58	-90.51	277.48	-252.94	175.00	102.08	72.92	2.400		
10,300.00	10,290.15	10,302.68	10,291.15	36.86	36.94	-90.51	277.48	-252.94	175.00	101.37	73.63	2.377		
10,400.00	10,390.15	10,402.68	10,391.15	37.22	37.29	-90.51	277.48	-252.94	175.00	100.66	74.34	2.354		
10,500.00	10,490.15	10,502.68	10,491.15	37.57	37.65	-90.51	277.48	-252.94	175.00	99.95	75.05	2.332		
10,600.00	10,590.15	10,602.68	10,591.15	37.93	38.00	-90.51	277.48	-252.94	175.00	99.23	75.77	2.310		
10,700.00	10,690.15	10,702.68	10,691.15	38.29	38.35	-90.51	277.48	-252.94	175.00	98.52	76.48	2.288		
10,800.00	10,790.15	10,802.68	10,791.15	38.64	38.71	-90.51	277.48	-252.94	175.00	97.81	77.19	2.267		
10,900.00	10,890.15	10,902.68	10,891.15	39.00	39.06	-90.51	277.48	-252.94	175.00	97.10	77.90	2.247		
11,000.00	10,990.15	11,002.68	10,991.15	39.35	39.42	-90.51	277.48	-252.94	175.00	96.39	78.61	2.226		
11,100.00	11,090.15	11,102.68	11,091.15	39.71	39.77	-90.51	277.48	-252.94	175.00	95.68	79.32	2.206		
11,200.00	11,190.15	11,202.68	11,191.15	40.07	40.13	-90.51	277.48	-252.94	175.00	94.97	80.03	2.187		
11,300.00	11,290.15	11,302.68	11,291.15	40.42	40.48	-90.51	277.48	-252.94	175.00	94.26	80.74	2.167		
11,400.00	11,390.15	11,402.68	11,391.15	40.78	40.84	-90.51	277.48	-252.94	175.00	93.55	81.45	2.148		
11,400.89	11,391.04	11,403.57	11,392.04	40.78	40.84	-90.51	277.48	-252.94	175.00	93.54	81.46	2.148		
11,450.00	11,440.09	11,452.62	11,441.09	40.94	41.01	-89.83	277.48	-252.94	174.58	92.79	81.79	2.134		
11,500.00	11,489.66	11,502.19	11,490.66	41.09	41.19	-87.74	277.48	-252.94	173.46	91.36	82.10	2.113		
11,550.00	11,538.47	11,551.00	11,539.47	41.24	41.36	-84.21	277.48	-252.94	172.12	89.72	82.39	2.089		
11,600.00	11,586.17	11,598.70	11,587.17	41.37	41.53	-79.22	277.48	-252.94	171.35	88.69	82.66	2.073		
11,603.83	11,589.77	11,602.30	11,590.77	41.38	41.55	-78.78	277.48	-252.94	171.35	88.67	82.68	2.072 SF		
11,650.00	11,632.38	11,644.91	11,633.38	41.50	41.70	-72.87	277.48	-252.94	172.26	89.35	82.91	2.078		
11,700.00	11,676.75	11,689.28	11,677.75	41.61	41.85	-65.40	277.48	-252.94	176.13	92.98	83.15	2.118		
11,750.00	11,718.95	11,731.48	11,719.95	41.72	42.00	-57.27	277.48	-252.94	184.18	100.80	83.38	2.209		
11,800.00	11,758.65	11,771.18	11,759.65	41.81	42.15	-49.04	277.48	-252.94	197.35	113.73	83.61	2.360		
11,850.00	11,795.55	11,808.08	11,796.55	41.90	42.28	-41.25	277.48	-252.94	216.06	132.22	83.85	2.577		
11,900.00	11,829.38	11,841.91	11,830.38	41.99	42.40	-34.27	277.48	-252.94	240.26	156.19	84.07	2.858		
11,950.00	11,859.87	11,874.27	11,862.74	42.08	42.51	-28.26	277.46	-252.94	269.50	185.23	84.27	3.198		
12,000.00	11,886.79	11,927.29	11,915.67	42.18	42.68	-23.40	274.59	-252.92	301.83	217.68	84.16	3.587		
12,050.00	11,909.94	11,988.82	11,976.44	42.28	42.86	-19.66	265.15	-252.85	335.46	252.02	83.45	4.020		
12,100.00	11,929.14	12,039.48	12,025.38	42.38	43.00	-16.54	252.18	-252.75	369.38	286.60	82.78	4.462		
12,150.00	11,944.24	12,158.01	12,134.47	42.49	43.30	-15.01	206.49	-252.40	402.54	324.08	78.46	5.130		
12,200.00	11,955.14	12,285.61	12,238.52	42.60	43.55	-14.46	133.09	-251.84	432.82	360.43	72.40	5.979		
12,250.00	11,961.74	12,433.21	12,334.76	42.71	43.76	-15.66	21.79	-250.98	456.60	391.89	64.71	7.056		
12,300.00	11,964.00	12,681.15	12,424.40	42.82	44.21	-38.68	-207.20	-249.23	469.32	415.04	54.28	8.647		
12,300.89	11,964.00	12,682.83	12,424.67	42.82	44.21	-38.89	-208.85	-249.22	469.44	415.18	54.26	8.652		
12,400.00	11,964.00	12,855.47	12,437.00	43.07	44.62	-90.44	-380.83	-247.91	473.77	420.19	53.58	8.842		
12,500.00	11,964.00	12,954.32	12,437.00	43.38	44.91	-90.44	-479.67	-247.15	472.71	418.99	53.71	8.801		
12,600.00	11,964.00	13,053.64	12,437.00	43.75	45.26	-90.44	-578.99	-246.39	472.22	418.23	53.98	8.748		
12,700.00	11,964.00	13,153.30	12,437.00	44.17	45.66	-90.44	-678.65	-245.63	472.04	417.70	54.34	8.686		
12,800.00	11,964.00	13,253.19	12,437.00	44.64	46.12	-90.44	-778.53	-244.86	472.00	417.24	54.77	8.619		
12,883.71	11,964.00	13,336.88	12,437.00	45.07	46.55	-90.48	-862.22	-244.22	472.00	416.86	55.15	8.559		
12,900.00	11,964.00	13,353.18	12,437.00	45.15	46.63	-90.48	-878.52	-244.10	472.00	416.78	55.22	8.547		
12,905.87	11,964.00	13,359.04	12,437.00	45.19	46.66	-90.48	-884.38	-244.05	472.00	416.75	55.25	8.543		
13,000.00	11,964.00	13,453.18	12,437.00	45.72	47.20	-90.48	-978.51	-243.33	472.00	416.28	55.72	8.471		
13,100.00	11,964.00	13,553.18	12,437.00	46.34	47.81	-90.48	-1,078.51	-242.57	472.00	415.75	56.25	8.391		
13,200.00	11,964.00	13,653.18	12,437.00	47.01	48.48	-90.48	-1,178.51	-241.80	472.00	415.18	56.82	8.306		
13,300.00	11,964.00	13,753.18	12,437.00	47.73	49.18	-90.48	-1,278.50	-241.04	472.00	414.57	57.43	8.218		
13,400.00	11,964.00	13,853.18	12,437.00	48.49	49.94	-90.49	-1,378.50	-240.28	472.00	413.92	58.08	8.127		
13,500.00	11,964.00	13,953.18	12,437.00	49.30	50.74	-90.49	-1,478.50	-239.51	472.00	413.24	58.76	8.033		
13,600.00	11,964.00	14,053.18	12,437.00	50.14	51.57	-90.49	-1,578.49	-238.75	472.00	412.53	59.47	7.936		
13,700.00	11,964.00	14,153.18	12,437.00	51.03	52.45	-90.49	-1,678.49	-237.98	472.00	411.78	60.22	7.838		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Charles Ling Fed Com - Charles Ling Fed Com #214H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
13,800.00	11,964.00	14,253.18	12,437.00	51.95	53.36	-90.49	-1,778.49	-237.22	472.00	411.00	61.00	7.738	
13,900.00	11,964.00	14,353.18	12,437.00	52.91	54.31	-90.49	-1,878.49	-236.45	472.00	410.20	61.81	7.637	
14,000.00	11,964.00	14,453.18	12,437.00	53.91	55.29	-90.50	-1,978.48	-235.69	472.00	409.36	62.64	7.535	
14,100.00	11,964.00	14,553.18	12,437.00	54.93	56.30	-90.50	-2,078.48	-234.92	472.00	408.49	63.51	7.432	
14,200.00	11,964.00	14,653.18	12,437.00	55.99	57.34	-90.50	-2,178.48	-234.16	472.00	407.60	64.40	7.329	
14,300.00	11,964.00	14,753.18	12,437.00	57.07	58.41	-90.50	-2,278.47	-233.39	472.00	406.69	65.32	7.226	
14,400.00	11,964.00	14,853.18	12,437.00	58.18	59.51	-90.51	-2,378.47	-232.63	472.00	405.75	66.26	7.124	
14,500.00	11,964.00	14,953.18	12,437.00	59.32	60.63	-90.51	-2,478.47	-231.86	472.00	404.78	67.22	7.022	
14,600.00	11,964.00	15,053.18	12,437.00	60.48	61.77	-90.51	-2,578.47	-231.10	472.00	403.79	68.21	6.920	
14,700.00	11,964.00	15,153.18	12,437.00	61.66	62.94	-90.52	-2,678.46	-230.33	472.00	402.78	69.22	6.819	
14,800.00	11,964.00	15,253.18	12,437.00	62.86	64.13	-90.52	-2,778.46	-229.57	472.00	401.75	70.25	6.719	
14,900.00	11,964.00	15,353.18	12,437.00	64.09	65.34	-90.52	-2,878.46	-228.80	472.00	400.71	71.30	6.620	
15,000.00	11,964.00	15,453.18	12,437.00	65.33	66.57	-90.53	-2,978.45	-228.04	472.00	399.64	72.36	6.523	
15,100.00	11,964.00	15,553.18	12,437.00	66.59	67.82	-90.53	-3,078.45	-227.27	472.00	398.55	73.45	6.426	
15,200.00	11,964.00	15,653.18	12,437.00	67.87	69.08	-90.54	-3,178.45	-226.51	472.00	397.45	74.55	6.331	
15,300.00	11,964.00	15,753.18	12,437.00	69.16	70.36	-90.55	-3,278.45	-225.75	472.00	396.33	75.67	6.238	
15,400.00	11,964.00	15,853.18	12,437.00	70.47	71.65	-90.56	-3,378.44	-224.98	472.00	395.19	76.81	6.145	
15,500.00	11,964.00	15,953.18	12,437.00	71.79	72.96	-90.57	-3,478.44	-224.22	472.00	394.04	77.96	6.055	
15,600.00	11,964.00	16,053.18	12,437.00	73.13	74.29	-90.58	-3,578.44	-223.45	472.00	392.88	79.12	5.966	
15,700.00	11,964.00	16,153.18	12,437.00	74.47	75.62	-90.59	-3,678.43	-222.69	472.00	391.70	80.30	5.878	
15,800.00	11,964.00	16,253.18	12,437.00	75.83	76.97	-90.61	-3,778.43	-221.92	472.00	390.51	81.49	5.792	
15,900.00	11,964.00	16,353.18	12,437.00	77.21	78.33	-90.63	-3,878.43	-221.16	472.00	389.30	82.70	5.708	
16,000.00	11,964.00	16,453.18	12,437.00	78.59	79.70	-90.65	-3,978.42	-220.39	472.00	388.09	83.91	5.625	
16,100.00	11,964.00	16,553.18	12,437.00	79.98	81.08	-90.68	-4,078.42	-219.63	472.00	386.86	85.14	5.544	
16,200.00	11,964.00	16,653.18	12,437.00	81.38	82.47	-90.73	-4,178.42	-218.86	472.00	385.62	86.38	5.464	
16,300.00	11,964.00	16,753.18	12,437.00	82.80	83.87	-90.80	-4,278.42	-218.10	472.00	384.37	87.63	5.386	
16,400.00	11,964.00	16,853.18	12,437.00	84.22	85.28	-90.90	-4,378.41	-217.33	472.00	383.11	88.89	5.310	
16,500.00	11,964.00	16,953.18	12,437.00	85.65	86.70	-91.09	-4,478.41	-216.57	472.00	381.84	90.16	5.235	
16,600.00	11,964.00	17,053.18	12,437.00	87.08	88.13	-91.56	-4,578.41	-215.80	472.00	380.56	91.44	5.162	
16,700.00	11,964.00	17,153.18	12,437.00	88.53	89.56	-94.31	-4,678.40	-215.04	472.00	379.28	92.72	5.090	
16,740.74	11,964.00	17,193.91	12,437.00	89.12	90.15	0.00	-4,719.14	-214.73	472.00	378.75	93.25	5.062	
16,740.74	11,964.00	17,193.91	12,437.00	89.12	90.15	0.00	-4,719.14	-214.73	472.00	378.75	93.25	5.062	
16,741.61	11,964.00	17,193.91	12,437.00	89.14	90.15	-0.44	-4,719.14	-214.73	472.00	378.76	93.24	5.062	



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design													Offset Site Error: 0.00 usft
Survey Program: 195-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
0.00	0.00	0.00	0.00	0.00	0.00	171.66	-5,491.03	805.03	5,549.77				
100.00	100.00	90.93	90.93	0.13	0.14	171.66	-5,490.92	805.00	5,549.63	5,549.37	0.27	N/A	
200.00	200.00	208.25	208.25	0.49	0.32	171.66	-5,490.47	804.87	5,549.24	5,548.43	0.80	6,897.286	
298.45	298.45	275.95	275.95	0.84	0.58	171.66	-5,490.34	804.81	5,549.01	5,547.60	1.42	3,915.878	
300.00	300.00	277.09	277.09	0.85	0.58	171.66	-5,490.34	804.81	5,549.01	5,547.59	1.43	3,889.703	
400.00	400.00	362.13	362.13	1.20	0.88	171.66	-5,490.53	804.83	5,549.23	5,547.15	2.08	2,669.099	
500.00	500.00	856.18	855.62	1.56	2.63	171.56	-5,472.92	811.87	5,545.72	5,541.53	4.19	1,323.443	
600.00	600.00	951.73	950.90	1.92	2.98	171.53	-5,466.05	813.85	5,538.91	5,534.01	4.89	1,132.485	
700.00	699.99	1,147.94	1,146.22	2.28	3.72	171.43	-5,449.15	821.31	5,531.46	5,525.50	5.96	928.195	
800.00	799.96	1,243.83	1,241.59	2.64	4.08	171.36	-5,440.34	825.97	5,525.67	5,519.00	6.67	828.798	
900.00	899.86	1,367.17	1,364.21	3.00	4.56	171.27	-5,428.53	832.18	5,521.25	5,513.77	7.48	738.218	
1,000.00	999.68	1,456.00	1,452.51	3.36	4.90	171.21	-5,420.05	836.75	5,518.62	5,510.45	8.17	675.675	
1,000.15	999.83	1,456.00	1,452.51	3.36	4.90	171.21	-5,420.05	836.75	5,518.62	5,510.45	8.17	675.629	
1,100.00	1,099.43	1,563.19	1,559.05	3.72	5.31	171.12	-5,409.76	842.49	5,516.87	5,507.94	8.93	618.074	
1,200.00	1,199.19	1,646.00	1,641.38	4.08	5.64	171.06	-5,401.94	846.76	5,515.24	5,505.65	9.60	574.750	
1,300.00	1,298.94	1,693.00	1,688.15	4.45	5.82	171.02	-5,397.84	848.99	5,514.24	5,504.11	10.13	544.159	
1,350.14	1,348.96	1,717.63	1,712.67	4.64	5.91	171.00	-5,395.86	850.08	5,514.09	5,503.68	10.41	529.854	
1,400.00	1,398.70	1,742.64	1,737.59	4.82	6.00	170.98	-5,393.98	851.14	5,514.17	5,503.49	10.68	516.285	
1,500.00	1,498.46	1,875.01	1,869.41	5.19	6.51	170.89	-5,383.44	857.23	5,513.85	5,502.32	11.53	478.178	
1,528.44	1,526.82	1,892.32	1,886.64	5.29	6.58	170.88	-5,382.08	858.05	5,513.82	5,502.13	11.70	471.332	
1,600.00	1,598.21	1,932.00	1,926.17	5.56	6.73	170.85	-5,379.10	859.86	5,514.01	5,501.90	12.11	455.503	
1,700.00	1,697.97	1,980.04	1,974.06	5.93	6.91	170.82	-5,375.90	861.80	5,515.03	5,502.39	12.64	436.180	
1,800.00	1,797.72	2,027.00	2,020.93	6.30	7.08	170.79	-5,373.33	863.28	5,517.05	5,503.88	13.18	418.668	
1,900.00	1,897.48	2,110.53	2,104.33	6.67	7.39	170.75	-5,369.35	865.58	5,519.72	5,505.88	13.84	398.766	
2,000.00	1,997.24	2,219.39	2,213.03	7.04	7.79	170.71	-5,364.23	868.49	5,522.45	5,507.85	14.60	378.291	
2,100.00	2,096.99	2,316.72	2,310.22	7.41	8.14	170.67	-5,359.63	870.84	5,525.11	5,509.80	15.31	360.826	
2,200.00	2,196.75	2,433.91	2,427.25	7.78	8.57	170.62	-5,353.95	873.51	5,527.64	5,511.55	16.10	343.365	
2,300.00	2,296.51	2,543.21	2,536.38	8.15	8.97	170.58	-5,348.35	875.77	5,529.85	5,513.00	16.86	328.070	
2,400.00	2,396.26	2,623.82	2,616.87	8.52	9.27	170.55	-5,344.28	877.38	5,532.16	5,514.66	17.51	315.963	
2,500.00	2,496.02	2,691.00	2,683.96	8.89	9.51	170.52	-5,341.22	879.15	5,535.03	5,516.92	18.11	305.580	
2,600.00	2,595.77	2,776.62	2,769.45	9.26	9.82	170.48	-5,337.58	882.07	5,538.33	5,519.55	18.79	294.812	
2,700.00	2,695.53	2,870.43	2,863.11	9.63	10.17	170.42	-5,333.66	885.69	5,541.80	5,522.31	19.49	284.349	
2,800.00	2,795.29	2,964.22	2,956.75	10.01	10.51	170.37	-5,329.85	889.28	5,545.37	5,525.17	20.19	274.621	
2,900.00	2,895.04	3,068.17	3,060.53	10.38	10.89	170.32	-5,325.63	893.38	5,548.97	5,528.03	20.93	265.070	
3,000.00	2,994.80	3,153.93	3,146.16	10.75	11.21	170.27	-5,322.20	896.84	5,552.65	5,531.05	21.61	256.973	
3,100.00	3,094.56	3,268.29	3,260.33	11.12	11.62	170.21	-5,317.65	901.45	5,556.36	5,533.97	22.39	248.184	
3,200.00	3,194.31	3,365.70	3,357.58	11.49	11.98	170.15	-5,313.63	905.36	5,559.92	5,536.82	23.11	240.631	
3,300.00	3,294.07	3,450.00	3,441.75	11.87	12.29	170.10	-5,310.36	908.72	5,563.72	5,539.95	23.77	234.025	
3,400.00	3,393.82	3,526.09	3,517.73	12.24	12.57	170.06	-5,307.68	911.76	5,567.87	5,543.46	24.41	228.088	
3,500.00	3,493.58	3,617.50	3,609.01	12.61	12.90	170.01	-5,304.68	915.49	5,572.28	5,547.18	25.10	221.960	
3,600.00	3,593.34	3,707.27	3,698.67	12.98	13.23	169.96	-5,301.84	919.24	5,576.84	5,551.05	25.79	216.220	
3,700.00	3,693.09	3,793.04	3,784.32	13.36	13.54	169.91	-5,299.31	922.83	5,581.62	5,555.15	26.46	210.911	
3,800.00	3,792.85	3,965.59	3,956.60	13.73	14.17	169.83	-5,292.73	929.78	5,585.26	5,557.80	27.46	203.374	
3,900.00	3,892.61	4,137.69	4,128.33	14.10	14.81	169.73	-5,284.01	936.82	5,587.74	5,559.28	28.46	196.339	
4,000.00	3,992.36	4,231.75	4,222.17	14.47	15.15	169.68	-5,278.97	940.57	5,590.12	5,560.95	29.17	191.656	
4,100.00	4,092.12	4,325.43	4,315.65	14.85	15.50	169.62	-5,274.04	944.34	5,592.62	5,562.74	29.87	187.210	
4,200.00	4,191.87	4,400.00	4,390.06	15.22	15.78	169.58	-5,270.18	947.42	5,595.26	5,564.76	30.51	183.400	
4,300.00	4,291.63	4,478.62	4,468.50	15.59	16.07	169.53	-5,266.38	951.00	5,598.32	5,567.16	31.16	179.670	
4,400.00	4,391.39	4,543.85	4,533.58	15.96	16.31	169.48	-5,263.60	954.40	5,602.03	5,570.27	31.76	176.396	
4,500.00	4,491.14	4,612.77	4,602.33	16.34	16.57	169.43	-5,261.01	958.41	5,606.34	5,573.97	32.37	173.192	
4,600.00	4,590.90	4,690.74	4,680.11	16.71	16.85	169.37	-5,258.38	963.21	5,611.11	5,578.09	33.02	169.944	
4,700.00	4,690.66	4,780.00	4,769.15	17.08	17.18	169.30	-5,255.70	968.94	5,616.29	5,582.58	33.71	166.619	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design													Offset Site Error: 0.00 usft	
Survey Program: 195-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
4,800.00	4,790.41	4,842.77	4,831.76	17.45	17.41	169.25	-5,254.05	973.16	5,621.86	5,587.56	34.29	163.931		
4,818.08	4,808.45	4,856.05	4,845.00	17.52	17.46	169.24	-5,253.73	974.08	5,622.92	5,588.51	34.41	163.421		
4,900.00	4,890.22	4,916.21	4,905.00	17.82	17.68	169.19	-5,252.40	978.34	5,627.04	5,592.12	34.92	161.138		
5,000.00	4,990.16	5,145.51	5,133.64	18.18	18.52	169.02	-5,246.12	994.42	5,629.76	5,593.61	36.15	155.727		
5,084.85	5,075.00	5,238.39	5,226.25	18.48	18.87	168.95	-5,242.04	1,000.19	5,628.03	5,591.23	36.80	152.934		
5,100.00	5,090.15	5,251.69	5,239.51	18.53	18.92	168.94	-5,241.47	1,000.98	5,627.56	5,590.66	36.90	152.495		
5,200.00	5,190.15	5,339.47	5,327.08	18.88	19.25	168.89	-5,237.88	1,005.89	5,624.62	5,587.04	37.58	149.660		
5,300.00	5,290.15	5,457.43	5,444.78	19.23	19.68	168.81	-5,233.12	1,012.03	5,621.67	5,583.29	38.38	146.489		
5,400.00	5,390.15	5,618.98	5,605.92	19.57	20.29	168.71	-5,225.56	1,020.72	5,618.21	5,578.87	39.34	142.827		
5,500.00	5,490.15	5,784.05	5,770.34	19.92	20.91	168.59	-5,215.08	1,030.90	5,613.05	5,572.74	40.31	139.253		
5,600.00	5,590.15	5,878.82	5,864.74	20.27	21.27	168.52	-5,208.82	1,036.37	5,607.71	5,566.69	41.02	136.710		
5,700.00	5,690.15	5,973.90	5,959.50	20.62	21.63	168.46	-5,202.72	1,041.32	5,602.46	5,560.73	41.73	134.255		
5,800.00	5,790.15	6,069.20	6,054.48	20.97	21.99	168.40	-5,196.69	1,046.28	5,597.29	5,554.85	42.44	131.884		
5,900.00	5,890.15	6,166.87	6,151.83	21.32	22.36	168.33	-5,190.57	1,051.41	5,592.20	5,549.03	43.16	129.566		
6,000.00	5,990.15	6,266.57	6,251.20	21.67	22.74	168.27	-5,184.34	1,056.55	5,587.12	5,543.23	43.89	127.303		
6,100.00	6,090.15	6,364.12	6,348.43	22.02	23.11	168.21	-5,178.28	1,061.51	5,582.06	5,537.45	44.61	125.136		
6,200.00	6,190.15	6,460.41	6,444.41	22.37	23.47	168.14	-5,172.34	1,066.44	5,577.06	5,531.74	45.32	123.052		
6,300.00	6,290.15	6,565.09	6,548.75	22.72	23.87	168.08	-5,165.88	1,071.88	5,572.08	5,526.01	46.07	120.951		
6,400.00	6,390.15	6,674.23	6,657.52	23.07	24.28	168.00	-5,158.96	1,077.63	5,566.96	5,520.13	46.83	118.871		
6,500.00	6,490.15	6,771.40	6,754.35	23.42	24.65	167.94	-5,152.73	1,082.70	5,561.77	5,514.22	47.55	116.965		
6,600.00	6,590.15	6,867.56	6,850.21	23.77	25.01	167.88	-5,146.69	1,087.44	5,556.65	5,508.38	48.27	115.126		
6,700.00	6,690.15	7,075.48	7,057.42	24.12	25.79	167.76	-5,131.98	1,096.28	5,550.65	5,501.27	49.38	112.408		
6,800.00	6,790.15	7,162.19	7,143.80	24.47	26.12	167.71	-5,125.24	1,099.48	5,543.81	5,493.76	50.06	110.748		
6,900.00	6,890.15	7,256.76	7,238.03	24.83	26.48	167.66	-5,118.00	1,102.85	5,537.08	5,486.32	50.76	109.074		
7,000.00	6,990.15	7,369.83	7,350.70	25.18	26.91	167.60	-5,109.29	1,106.69	5,530.28	5,478.74	51.53	107.312		
7,100.00	7,090.15	7,474.80	7,455.29	25.53	27.30	167.55	-5,101.01	1,110.04	5,523.26	5,470.98	52.28	105.655		
7,200.00	7,190.15	7,565.51	7,545.69	25.88	27.64	167.50	-5,093.97	1,112.78	5,516.32	5,463.35	52.97	104.146		
7,300.00	7,290.15	7,654.28	7,634.16	26.23	27.97	167.46	-5,087.26	1,115.31	5,509.56	5,455.90	53.65	102.692		
7,400.00	7,390.15	7,737.33	7,716.97	26.59	28.28	167.43	-5,081.24	1,117.54	5,503.06	5,448.74	54.31	101.319		
7,500.00	7,490.15	7,823.00	7,802.41	26.94	28.60	167.39	-5,075.33	1,119.69	5,496.86	5,441.88	54.99	99.968		
7,600.00	7,590.15	7,895.20	7,874.43	27.29	28.87	167.36	-5,070.63	1,121.50	5,491.04	5,435.43	55.61	98.743		
7,700.00	7,690.15	7,969.73	7,948.80	27.65	29.15	167.33	-5,066.09	1,123.48	5,485.69	5,429.45	56.24	97.540		
7,800.00	7,790.15	8,046.60	8,025.52	28.00	29.43	167.30	-5,061.75	1,125.63	5,480.78	5,423.91	56.88	96.359		
7,900.00	7,890.15	8,126.71	8,105.49	28.35	29.72	167.27	-5,057.54	1,127.84	5,476.26	5,418.73	57.53	95.193		
8,000.00	7,990.15	8,209.90	8,188.55	28.71	30.03	167.24	-5,053.49	1,130.09	5,472.10	5,413.91	58.19	94.043		
8,100.00	8,090.15	8,353.40	8,331.84	29.06	30.55	167.19	-5,046.30	1,133.04	5,467.66	5,408.60	59.06	92.577		
8,200.00	8,190.15	8,480.13	8,458.36	29.41	31.02	167.15	-5,039.26	1,134.81	5,462.54	5,402.67	59.87	91.237		
8,300.00	8,290.15	8,600.39	8,578.37	29.77	31.46	167.11	-5,031.94	1,137.12	5,457.04	5,396.38	60.66	89.961		
8,400.00	8,390.15	8,684.56	8,662.35	30.12	31.77	167.08	-5,026.76	1,139.03	5,451.53	5,390.20	61.33	88.894		
8,500.00	8,490.15	8,774.00	8,751.61	30.48	32.10	167.05	-5,021.39	1,141.24	5,446.23	5,384.22	62.01	87.829		
8,600.00	8,590.15	8,842.40	8,819.87	30.83	32.35	167.02	-5,017.53	1,143.03	5,441.31	5,378.69	62.62	86.897		
8,700.00	8,690.15	8,911.57	8,888.93	31.18	32.60	166.99	-5,014.01	1,144.91	5,436.96	5,373.73	63.23	85.989		
8,800.00	8,790.15	8,963.00	8,940.29	31.54	32.79	166.97	-5,011.64	1,146.35	5,433.21	5,369.44	63.77	85.198		
8,900.00	8,890.15	9,049.72	9,026.92	31.89	33.10	166.94	-5,008.28	1,148.21	5,429.95	5,365.52	64.44	84.269		
9,000.00	8,990.15	9,118.80	9,095.96	32.25	33.35	166.93	-5,006.25	1,148.84	5,427.31	5,362.27	65.04	83.451		
9,100.00	9,090.15	9,225.19	9,202.33	32.60	33.72	166.93	-5,003.86	1,148.54	5,425.06	5,359.29	65.76	82.494		
9,200.00	9,190.15	9,370.25	9,347.32	32.96	34.22	166.94	-4,999.99	1,146.63	5,422.16	5,355.54	66.62	81.386		
9,300.00	9,290.15	9,439.79	9,416.83	33.31	34.45	166.95	-4,998.19	1,145.60	5,419.25	5,352.04	67.21	80.627		
9,400.00	9,390.15	9,534.00	9,511.01	33.67	34.77	166.95	-4,996.01	1,144.37	5,416.69	5,348.80	67.89	79.785		
9,500.00	9,490.15	9,633.92	9,610.89	34.02	35.11	166.97	-4,993.82	1,142.76	5,414.19	5,345.61	68.59	78.941		
9,600.00	9,590.15	9,724.00	9,700.92	34.38	35.41	166.98	-4,991.76	1,140.56	5,411.44	5,342.19	69.24	78.149		
9,700.00	9,690.15	9,816.65	9,793.52	34.73	35.72	167.00	-4,989.83	1,138.11	5,408.83	5,338.93	69.91	77.369		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design													Offset Site Error: 0.00 usft	
Survey Program: 195-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N-S (usft)	Offset Wellbore Centre +E-W (usft)				Between Centres (usft)	Between Ellipses (usft)	
9,800.00	9,790.15	9,915.00	9,891.83	35.09	36.05	167.02	-4,988.31	1,135.87	5,406.81	5,336.22	70.59	76.591		
9,900.00	9,890.15	9,957.69	9,934.51	35.44	36.19	167.03	-4,987.82	1,135.23	5,405.17	5,334.09	71.09	76.037		
10,000.00	9,990.15	10,020.44	9,997.27	35.80	36.40	167.03	-4,987.26	1,135.15	5,404.28	5,332.63	71.65	75.428		
10,100.00	10,090.15	10,105.00	10,081.80	36.15	36.69	167.01	-4,986.83	1,136.70	5,404.15	5,331.86	72.29	74.757		
10,114.15	10,104.30	10,105.00	10,081.80	36.20	36.69	167.01	-4,986.83	1,136.70	5,404.13	5,331.79	72.34	74.709		
10,200.00	10,190.15	10,167.44	10,144.22	36.51	36.90	166.99	-4,986.71	1,138.36	5,404.43	5,331.58	72.85	74.186		
10,300.00	10,290.15	10,263.21	10,239.97	36.86	37.23	166.97	-4,986.75	1,140.21	5,404.91	5,331.37	73.54	73.498		
10,400.00	10,390.15	10,371.57	10,348.32	37.22	37.60	166.96	-4,986.99	1,141.41	5,405.38	5,331.11	74.27	72.779		
10,500.00	10,490.15	10,486.24	10,463.00	37.57	37.99	166.96	-4,987.09	1,142.10	5,405.60	5,330.58	75.03	72.050		
10,600.00	10,590.15	10,606.66	10,583.41	37.93	38.40	166.95	-4,986.77	1,142.97	5,405.50	5,329.69	75.81	71.303		
10,700.00	10,690.15	10,675.00	10,651.74	38.29	38.64	166.94	-4,986.28	1,143.86	5,405.23	5,328.83	76.39	70.754		
10,733.45	10,723.60	10,724.36	10,701.10	38.41	38.81	166.93	-4,985.98	1,144.59	5,405.08	5,328.39	76.69	70.479		
10,734.60	10,724.75	10,725.10	10,701.84	38.41	38.81	166.93	-4,985.98	1,144.61	5,405.08	5,328.38	76.70	70.473		
10,800.00	10,790.15	10,767.20	10,743.94	38.64	38.95	166.92	-4,985.94	1,145.21	5,405.23	5,328.16	77.07	70.137		
10,900.00	10,890.15	10,865.00	10,841.72	39.00	39.28	166.91	-4,986.57	1,146.52	5,406.15	5,328.39	77.76	69.524		
11,000.00	10,990.15	10,910.11	10,886.82	39.35	39.43	166.90	-4,987.10	1,147.19	5,407.36	5,329.11	78.25	69.107		
11,100.00	11,090.15	11,003.91	10,980.60	39.71	39.75	166.89	-4,988.13	1,149.17	5,408.91	5,329.99	78.92	68.537		
11,200.00	11,190.15	11,090.76	11,067.41	40.07	40.04	166.86	-4,989.08	1,151.59	5,410.61	5,331.04	79.57	68.002		
11,300.00	11,290.15	11,169.69	11,146.30	40.42	40.30	166.85	-4,990.29	1,153.49	5,412.65	5,332.48	80.18	67.507		
11,400.00	11,390.15	11,265.05	11,241.62	40.78	40.62	166.83	-4,992.28	1,155.16	5,415.08	5,334.23	80.85	66.973		
11,400.89	11,391.04	11,268.25	11,244.82	40.78	40.63	166.83	-4,992.35	1,155.21	5,415.10	5,334.23	80.87	66.961		
11,450.00	11,440.09	11,444.92	11,421.48	40.94	41.20	166.82	-4,994.13	1,156.19	5,413.73	5,332.06	81.67	66.288		
11,500.00	11,489.66	11,490.69	11,467.25	41.09	41.35	166.79	-4,994.14	1,156.21	5,407.88	5,325.90	81.98	65.965		
11,550.00	11,538.47	11,543.26	11,519.82	41.24	41.53	166.74	-4,994.09	1,156.36	5,398.08	5,315.77	82.31	65.580		
11,600.00	11,586.17	11,594.56	11,571.12	41.37	41.70	166.67	-4,993.97	1,156.64	5,384.42	5,301.79	82.63	65.160		
11,650.00	11,632.38	11,646.80	11,623.36	41.50	41.88	166.58	-4,993.77	1,157.04	5,367.01	5,284.06	82.96	64.698		
11,700.00	11,676.75	11,699.30	11,675.86	41.61	42.06	166.47	-4,993.49	1,157.46	5,345.96	5,262.68	83.27	64.198		
11,750.00	11,718.95	11,715.00	11,691.55	41.72	42.12	166.35	-4,993.39	1,157.59	5,321.53	5,238.09	83.44	63.776		
11,800.00	11,758.65	11,715.00	11,691.55	41.81	42.12	166.21	-4,993.39	1,157.59	5,294.18	5,210.64	83.54	63.375		
11,850.00	11,795.55	11,715.00	11,691.55	41.90	42.12	166.06	-4,993.39	1,157.59	5,264.09	5,180.47	83.62	62.951		
11,900.00	11,829.38	11,715.00	11,691.55	41.99	42.12	165.89	-4,993.39	1,157.59	5,231.45	5,147.75	83.70	62.506		
11,950.00	11,859.87	11,715.00	11,691.55	42.08	42.12	165.70	-4,993.39	1,157.59	5,196.45	5,112.69	83.76	62.040		
12,000.00	11,886.79	11,739.32	11,715.87	42.18	42.20	165.50	-4,993.67	1,157.70	5,158.86	5,074.95	83.91	61.479		
12,050.00	11,909.94	11,763.00	11,739.52	42.28	42.28	165.29	-4,994.78	1,157.66	5,120.05	5,035.99	84.06	60.912		
12,100.00	11,929.14	11,763.00	11,739.52	42.38	42.28	165.06	-4,994.78	1,157.66	5,079.20	4,995.10	84.10	60.393		
12,150.00	11,944.24	11,763.00	11,739.52	42.49	42.28	164.82	-4,994.78	1,157.66	5,037.03	4,952.88	84.14	59.862		
12,200.00	11,955.14	11,763.00	11,739.52	42.60	42.28	164.57	-4,994.78	1,157.66	4,993.82	4,909.63	84.18	59.321		
12,250.00	11,961.74	11,763.00	11,739.52	42.71	42.28	164.31	-4,994.78	1,157.66	4,949.88	4,865.65	84.22	58.771		
12,300.00	11,964.00	11,763.00	11,739.52	42.82	42.28	164.05	-4,994.78	1,157.66	4,905.53	4,821.27	84.26	58.216		
12,300.89	11,964.00	11,763.00	11,739.52	42.82	42.28	164.04	-4,994.78	1,157.66	4,904.74	4,820.48	84.27	58.206		
12,400.00	11,964.00	11,763.00	11,739.52	43.07	42.28	163.52	-4,994.78	1,157.66	4,816.08	4,731.72	84.36	57.092		
12,500.00	11,964.00	11,763.00	11,739.52	43.38	42.28	163.02	-4,994.78	1,157.66	4,725.51	4,641.05	84.46	55.951		
12,600.00	11,964.00	11,763.00	11,739.52	43.75	42.28	162.53	-4,994.78	1,157.66	4,633.87	4,549.30	84.57	54.794		
12,700.00	11,964.00	11,763.00	11,739.52	44.17	42.28	162.06	-4,994.78	1,157.66	4,541.21	4,456.52	84.69	53.624		
12,800.00	11,964.00	11,763.00	11,739.52	44.64	42.28	161.62	-4,994.78	1,157.66	4,447.58	4,362.77	84.81	52.444		
12,883.71	11,964.00	11,763.00	11,739.52	45.07	42.28	161.26	-4,994.78	1,157.66	4,368.50	4,283.59	84.91	51.449		
12,900.00	11,964.00	11,763.00	11,739.52	45.15	42.28	161.20	-4,994.78	1,157.66	4,353.05	4,268.12	84.93	51.254		
13,000.00	11,964.00	11,763.00	11,739.52	45.72	42.28	160.77	-4,994.78	1,157.66	4,258.36	4,173.30	85.06	50.061		
13,100.00	11,964.00	11,763.00	11,739.52	46.34	42.28	160.33	-4,994.78	1,157.66	4,163.93	4,078.72	85.21	48.866		
13,200.00	11,964.00	11,763.00	11,739.52	47.01	42.28	159.86	-4,994.78	1,157.66	4,069.76	3,984.38	85.38	47.669		
13,300.00	11,964.00	11,763.00	11,739.52	47.73	42.28	159.38	-4,994.78	1,157.66	3,975.87	3,890.31	85.56	46.470		
13,400.00	11,964.00	11,763.00	11,739.52	48.49	42.28	158.87	-4,994.78	1,157.66	3,882.29	3,796.53	85.76	45.268		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design													Leo Thorsness 13-24S-33E AR - #211H - Wellbore #1 - Surveys		Offset Site Error: 0.00 usft	
Survey Program: 195-MWD													Offset Well Error: 0.00 usft			
Reference		Offset		Semi Major Axis		Distance							Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor				
13,500.00	11,964.00	11,763.00	11,739.52	49.30	42.28	158.33	-4,994.78	1,157.66	3,789.04	3,703.05	85.99	44.064				
13,600.00	11,964.00	11,763.00	11,739.52	50.14	42.28	157.77	-4,994.78	1,157.66	3,696.14	3,609.90	86.24	42.859				
13,700.00	11,964.00	11,763.00	11,739.52	51.03	42.28	157.18	-4,994.78	1,157.66	3,603.62	3,517.11	86.52	41.652				
13,800.00	11,964.00	11,763.00	11,739.52	51.95	42.28	156.56	-4,994.78	1,157.66	3,511.52	3,424.69	86.83	40.443				
13,900.00	11,964.00	11,763.00	11,739.52	52.91	42.28	155.90	-4,994.78	1,157.66	3,419.85	3,332.68	87.17	39.233				
14,000.00	11,964.00	11,763.00	11,739.52	53.91	42.28	155.21	-4,994.78	1,157.66	3,328.67	3,241.12	87.55	38.022				
14,100.00	11,964.00	11,763.00	11,739.52	54.93	42.28	154.48	-4,994.78	1,157.66	3,238.00	3,150.04	87.96	36.811				
14,200.00	11,964.00	11,763.00	11,739.52	55.99	42.28	153.70	-4,994.78	1,157.66	3,147.90	3,059.48	88.43	35.599				
14,300.00	11,964.00	11,763.00	11,739.52	57.07	42.28	152.88	-4,994.78	1,157.66	3,058.42	2,969.48	88.94	34.389				
14,400.00	11,964.00	11,763.00	11,739.52	58.18	42.28	152.02	-4,994.78	1,157.66	2,969.61	2,880.10	89.50	33.179				
14,500.00	11,964.00	11,763.00	11,739.52	59.32	42.28	151.09	-4,994.78	1,157.66	2,881.53	2,791.40	90.13	31.972				
14,600.00	11,964.00	11,763.00	11,739.52	60.48	42.28	150.11	-4,994.78	1,157.66	2,794.25	2,703.44	90.81	30.769				
14,700.00	11,964.00	11,763.00	11,739.52	61.66	42.28	149.07	-4,994.78	1,157.66	2,707.85	2,616.28	91.57	29.570				
14,800.00	11,964.00	11,763.00	11,739.52	62.86	42.28	147.96	-4,994.78	1,157.66	2,622.42	2,530.01	92.41	28.377				
14,900.00	11,964.00	11,763.00	11,739.52	64.09	42.28	146.77	-4,994.78	1,157.66	2,538.06	2,444.72	93.34	27.193				
15,000.00	11,964.00	11,763.00	11,739.52	65.33	42.28	145.50	-4,994.78	1,157.66	2,454.87	2,360.51	94.35	26.018				
15,100.00	11,964.00	11,763.00	11,739.52	66.59	42.28	144.15	-4,994.78	1,157.66	2,372.98	2,277.50	95.47	24.855				
15,200.00	11,964.00	11,763.00	11,739.52	67.87	42.28	142.69	-4,994.78	1,157.66	2,292.52	2,195.82	96.70	23.708				
15,300.00	11,964.00	11,763.00	11,739.52	69.16	42.28	141.13	-4,994.78	1,157.66	2,213.66	2,115.62	98.04	22.578				
15,400.00	11,964.00	11,763.00	11,739.52	70.47	42.28	139.46	-4,994.78	1,157.66	2,136.57	2,037.06	99.51	21.470				
15,500.00	11,964.00	11,763.00	11,739.52	71.79	42.28	137.66	-4,994.78	1,157.66	2,061.45	1,960.33	101.11	20.388				
15,600.00	11,964.00	11,763.00	11,739.52	73.13	42.28	135.72	-4,994.78	1,157.66	1,988.52	1,885.66	102.85	19.334				
15,700.00	11,964.00	11,763.00	11,739.52	74.47	42.28	133.64	-4,994.78	1,157.66	1,918.03	1,813.30	104.73	18.314				
15,800.00	11,964.00	11,763.00	11,739.52	75.83	42.28	131.40	-4,994.78	1,157.66	1,850.26	1,743.51	106.75	17.333				
15,900.00	11,964.00	11,763.00	11,739.52	77.21	42.28	129.00	-4,994.78	1,157.66	1,785.53	1,676.62	108.91	16.395				
16,000.00	11,964.00	11,783.97	11,760.37	78.59	42.34	126.46	-4,996.95	1,157.87	1,723.29	1,611.94	111.36	15.476				
16,100.00	11,964.00	11,786.16	11,762.54	79.98	42.34	123.70	-4,997.27	1,157.93	1,665.50	1,551.72	113.78	14.638				
16,200.00	11,964.00	11,788.63	11,764.98	81.38	42.35	120.75	-4,997.65	1,158.00	1,611.83	1,495.53	116.30	13.859				
16,300.00	11,964.00	11,810.00	11,785.89	82.80	42.41	117.72	-5,001.89	1,159.01	1,563.33	1,444.31	119.02	13.136				
16,400.00	11,964.00	11,810.00	11,785.89	84.22	42.41	114.37	-5,001.89	1,159.01	1,518.95	1,397.34	121.61	12.490				
16,500.00	11,964.00	11,810.00	11,785.89	85.65	42.41	110.83	-5,001.89	1,159.01	1,480.01	1,355.83	124.18	11.919				
16,600.00	11,964.00	11,810.00	11,785.89	87.08	42.41	107.12	-5,001.89	1,159.01	1,446.94	1,320.28	126.66	11.424				
16,700.00	11,964.00	11,810.00	11,785.89	88.53	42.41	103.25	-5,001.89	1,159.01	1,420.16	1,291.17	128.99	11.010				
16,740.74	11,964.00	11,810.00	11,785.89	89.12	42.41	101.63	-5,001.89	1,159.01	1,411.13	1,281.26	129.88	10.865				
16,741.61	11,964.00	11,810.00	11,785.89	89.14	42.41	101.60	-5,001.89	1,159.01	1,410.95	1,280.86	130.09	10.846 CC, ES, SF				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #3H - Wellbore #1 - Surveys													Offset Site Error: 0.00 usft
Survey Program: 100-GYRO-NS, 10518-MWD													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Distance		Minimum Separation		Separation Factor		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.00	0.00	0.00	0.00	0.00	0.00	-166.78	-4,771.33	-1,121.13	4,901.36				
100.00	100.00	156.03	156.01	0.13	0.36	-166.80	-4,769.86	-1,119.01	4,900.08	4,899.60	0.49	N/A	
200.00	200.00	249.45	249.40	0.49	0.69	-166.81	-4,768.70	-1,117.30	4,898.45	4,897.29	1.17	4,193.413	
300.00	300.00	337.22	337.15	0.85	1.00	-166.83	-4,767.74	-1,115.62	4,896.95	4,895.12	1.83	2,670.970	
400.00	400.00	421.88	421.79	1.20	1.29	-166.84	-4,767.08	-1,114.32	4,895.84	4,893.35	2.49	1,968.347	
500.00	500.00	529.77	529.68	1.56	1.67	-166.86	-4,766.18	-1,112.87	4,894.71	4,891.49	3.22	1,519.112	
600.00	600.00	624.20	624.09	1.92	2.00	-166.87	-4,765.40	-1,111.41	4,893.56	4,889.65	3.91	1,251.431	
656.97	656.97	671.86	671.74	2.12	2.16	-166.88	-4,765.07	-1,110.77	4,893.26	4,888.98	4.28	1,143.068	
700.00	699.99	708.43	708.31	2.28	2.29	-166.89	-4,764.86	-1,110.38	4,893.43	4,888.87	4.56	1,072.530	
800.00	799.96	800.00	799.88	2.64	2.61	-166.91	-4,764.44	-1,109.65	4,895.09	4,889.85	5.24	934.114	
900.00	899.86	911.57	911.44	3.00	2.99	-166.94	-4,763.83	-1,108.85	4,898.22	4,892.23	5.99	817.875	
1,000.00	999.68	1,000.00	999.87	3.36	3.30	-166.98	-4,763.36	-1,108.17	4,902.89	4,896.23	6.66	736.389	
1,000.15	999.83	1,000.00	999.87	3.36	3.30	-166.98	-4,763.36	-1,108.17	4,902.90	4,896.24	6.66	736.329	
1,100.00	1,099.43	1,079.76	1,079.63	3.72	3.58	-167.02	-4,763.14	-1,107.79	4,908.65	4,901.35	7.30	672.696	
1,200.00	1,199.19	1,196.81	1,196.67	4.08	3.99	-167.06	-4,762.87	-1,107.61	4,914.53	4,906.47	8.07	609.235	
1,300.00	1,298.94	1,280.81	1,280.67	4.45	4.28	-167.10	-4,762.58	-1,107.50	4,920.30	4,911.58	8.72	564.166	
1,400.00	1,398.70	1,392.51	1,392.37	4.82	4.67	-167.14	-4,762.19	-1,107.91	4,926.18	4,916.71	9.47	520.018	
1,500.00	1,498.46	1,505.71	1,505.57	5.19	5.07	-167.16	-4,761.33	-1,108.76	4,931.74	4,921.51	10.23	482.051	
1,600.00	1,598.21	1,600.00	1,599.85	5.56	5.40	-167.19	-4,760.61	-1,109.35	4,937.28	4,926.35	10.92	452.026	
1,700.00	1,697.97	1,733.70	1,733.54	5.93	5.87	-167.22	-4,759.02	-1,110.34	4,942.40	4,930.65	11.75	420.509	
1,800.00	1,797.72	1,825.84	1,825.67	6.30	6.19	-167.25	-4,757.73	-1,110.79	4,947.28	4,934.85	12.44	397.733	
1,900.00	1,897.48	1,903.06	1,902.89	6.67	6.46	-167.28	-4,756.96	-1,111.08	4,952.54	4,939.47	13.07	378.883	
2,000.00	1,997.24	2,026.22	2,026.03	7.04	6.89	-167.31	-4,755.62	-1,111.79	4,957.75	4,943.88	13.87	357.545	
2,100.00	2,096.99	2,128.98	2,128.78	7.41	7.25	-167.33	-4,754.13	-1,112.67	4,962.67	4,948.08	14.59	340.161	
2,200.00	2,196.75	2,220.54	2,220.33	7.78	7.57	-167.36	-4,752.93	-1,113.55	4,967.74	4,952.47	15.27	325.269	
2,300.00	2,296.51	2,328.67	2,328.45	8.15	7.95	-167.38	-4,751.39	-1,114.65	4,972.72	4,956.71	16.01	310.506	
2,400.00	2,396.26	2,422.74	2,422.50	8.52	8.28	-167.40	-4,750.04	-1,115.81	4,977.74	4,961.03	16.71	297.935	
2,500.00	2,496.02	2,522.98	2,522.72	8.89	8.63	-167.42	-4,748.67	-1,116.94	4,982.81	4,965.38	17.42	286.010	
2,600.00	2,595.77	2,627.54	2,627.26	9.26	8.99	-167.44	-4,747.18	-1,118.19	4,987.83	4,969.68	18.15	274.788	
2,700.00	2,695.53	2,731.62	2,731.32	9.63	9.36	-167.46	-4,745.59	-1,119.26	4,992.71	4,973.83	18.88	264.448	
2,800.00	2,795.29	2,826.74	2,826.43	10.01	9.69	-167.49	-4,744.19	-1,120.25	4,997.65	4,978.08	19.58	255.293	
2,900.00	2,895.04	2,920.71	2,920.38	10.38	10.02	-167.51	-4,742.79	-1,121.50	5,002.65	4,982.38	20.27	246.820	
3,000.00	2,994.80	3,000.00	2,999.66	10.75	10.30	-167.53	-4,741.87	-1,122.53	5,007.95	4,987.04	20.91	239.522	
3,100.00	3,094.56	3,101.36	3,101.01	11.12	10.65	-167.55	-4,740.92	-1,123.68	5,013.44	4,991.82	21.63	231.824	
3,200.00	3,194.31	3,200.00	3,199.64	11.49	11.00	-167.58	-4,740.03	-1,124.67	5,018.94	4,996.61	22.33	224.718	
3,300.00	3,294.07	3,299.80	3,299.43	11.87	11.35	-167.61	-4,739.24	-1,125.26	5,024.45	5,001.40	23.05	218.007	
3,400.00	3,393.82	3,389.57	3,389.20	12.24	11.66	-167.64	-4,738.64	-1,125.61	5,030.05	5,006.33	23.72	212.025	
3,500.00	3,493.58	3,473.58	3,473.20	12.61	11.95	-167.67	-4,738.28	-1,126.05	5,035.90	5,011.52	24.38	206.566	
3,600.00	3,593.34	3,566.64	3,566.27	12.98	12.28	-167.70	-4,738.15	-1,126.41	5,042.02	5,016.95	25.07	201.147	
3,700.00	3,693.09	3,668.42	3,668.05	13.36	12.63	-167.74	-4,738.08	-1,126.63	5,048.16	5,022.38	25.78	195.781	
3,800.00	3,792.85	3,762.02	3,761.65	13.73	12.96	-167.77	-4,737.97	-1,127.01	5,054.31	5,027.83	26.47	190.919	
3,900.00	3,892.61	3,846.39	3,846.01	14.10	13.25	-167.80	-4,738.03	-1,127.49	5,060.68	5,033.55	27.13	186.545	
4,000.00	3,992.36	3,935.58	3,935.20	14.47	13.56	-167.83	-4,738.41	-1,128.00	5,067.38	5,039.58	27.80	182.280	
4,100.00	4,092.12	4,025.66	4,025.28	14.85	13.88	-167.87	-4,738.85	-1,128.39	5,074.13	5,045.65	28.47	178.201	
4,200.00	4,191.87	4,100.00	4,099.61	15.22	14.13	-167.90	-4,739.63	-1,128.81	5,081.42	5,052.32	29.09	174.675	
4,300.00	4,291.63	4,200.00	4,199.61	15.59	14.48	-167.93	-4,740.80	-1,129.36	5,088.85	5,059.05	29.80	170.761	
4,400.00	4,391.39	4,283.02	4,282.62	15.96	14.77	-167.97	-4,741.82	-1,129.71	5,096.34	5,065.89	30.45	167.374	
4,500.00	4,491.14	4,394.76	4,394.35	16.34	15.16	-168.01	-4,743.53	-1,129.96	5,104.07	5,072.87	31.20	163.578	
4,600.00	4,590.90	4,488.11	4,487.68	16.71	15.48	-168.05	-4,744.89	-1,129.86	5,111.65	5,079.76	31.89	160.296	
4,700.00	4,690.66	4,613.06	4,612.62	17.08	15.91	-168.10	-4,746.71	-1,128.65	5,119.06	5,086.37	32.69	156.583	
4,800.00	4,790.41	4,707.00	4,706.52	17.45	16.24	-168.16	-4,748.10	-1,126.77	5,126.29	5,092.90	33.38	153.564	
4,818.08	4,808.45	4,724.18	4,723.70	17.52	16.30	-168.17	-4,748.38	-1,126.36	5,127.61	5,094.10	33.51	153.028	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #3H - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 100-GYRO-NS, 10518-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance		Minimum Separation		Separation Factor		Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
4,900.00	4,890.22	4,800.00	4,799.47	17.82	16.56	-168.23	-4,749.74	-1,124.08	5,132.84	5,098.77	34.07	150.667		
5,000.00	4,990.16	4,894.61	4,894.00	18.18	16.89	-168.28	-4,751.65	-1,120.75	5,137.23	5,102.47	34.76	147.810		
5,084.85	5,075.00	4,969.48	4,968.81	18.48	17.16	-168.32	-4,753.26	-1,118.21	5,139.27	5,103.96	35.32	145.524		
5,100.00	5,090.15	4,982.81	4,982.13	18.53	17.20	-168.33	-4,753.56	-1,117.79	5,139.51	5,104.09	35.42	145.121		
5,200.00	5,190.15	5,144.46	5,143.71	18.88	17.77	-168.38	-4,755.92	-1,113.59	5,140.38	5,104.03	36.35	141.426		
5,300.00	5,290.15	5,242.58	5,241.81	19.23	18.11	-168.40	-4,756.61	-1,111.78	5,140.71	5,103.67	37.04	138.780		
5,400.00	5,390.15	5,345.62	5,344.83	19.57	18.47	-168.42	-4,757.48	-1,109.96	5,141.18	5,103.42	37.76	136.169		
5,500.00	5,490.15	5,461.37	5,460.56	19.92	18.87	-168.44	-4,758.04	-1,107.96	5,141.29	5,102.78	38.52	133.483		
5,600.00	5,590.15	5,553.31	5,552.49	20.27	19.19	-168.46	-4,758.43	-1,106.32	5,141.36	5,102.17	39.19	131.191		
5,700.00	5,690.15	5,641.21	5,640.37	20.62	19.50	-168.48	-4,759.01	-1,104.91	5,141.69	5,101.84	39.85	129.031		
5,800.00	5,790.15	5,737.85	5,737.00	20.97	19.84	-168.50	-4,759.84	-1,103.24	5,142.18	5,101.64	40.54	126.844		
5,900.00	5,890.15	5,843.14	5,842.26	21.32	20.21	-168.52	-4,760.65	-1,101.53	5,142.61	5,101.35	41.26	124.633		
6,000.00	5,990.15	5,944.13	5,943.25	21.67	20.56	-168.53	-4,761.28	-1,100.30	5,142.97	5,101.01	41.97	122.542		
6,100.00	6,090.15	6,055.18	6,054.28	22.02	20.95	-168.55	-4,761.94	-1,098.89	5,143.31	5,100.60	42.71	120.415		
6,200.00	6,190.15	6,126.11	6,126.11	22.37	82.92	-116.49	-260.14	-1,159.78	5,108.91	5,054.75	54.16	94.331		
6,300.00	6,290.15	6,126.11	6,126.11	22.72	82.92	-116.49	-260.14	-1,159.78	5,011.80	4,957.29	54.52	91.932		
6,400.00	6,390.15	6,126.11	6,126.11	23.07	82.92	-116.49	-260.14	-1,159.78	4,914.81	4,859.93	54.88	89.548		
6,500.00	6,490.15	6,126.11	6,126.11	23.42	82.92	-116.49	-260.14	-1,159.78	4,817.95	4,762.68	55.27	87.179		
6,600.00	6,590.15	6,126.11	6,126.11	23.77	82.92	-116.49	-260.14	-1,159.78	4,721.21	4,665.55	55.66	84.825		
6,700.00	6,690.15	6,126.11	6,126.11	24.12	82.92	-116.49	-260.14	-1,159.78	4,624.62	4,568.55	56.06	82.487		
6,800.00	6,790.15	6,126.11	6,126.11	24.47	82.92	-116.49	-260.14	-1,159.78	4,528.17	4,471.68	56.49	80.165		
6,900.00	6,890.15	6,126.11	6,126.11	24.83	82.92	-116.49	-260.14	-1,159.78	4,431.88	4,374.96	56.92	77.859		
7,000.00	6,990.15	6,126.11	6,126.11	25.18	82.92	-116.49	-260.14	-1,159.78	4,335.75	4,278.38	57.37	75.569		
7,100.00	7,090.15	6,126.11	6,126.11	25.53	82.92	-116.49	-260.14	-1,159.78	4,239.81	4,181.97	57.84	73.297		
7,200.00	7,190.15	6,126.11	6,126.11	25.88	82.92	-116.49	-260.14	-1,159.78	4,144.06	4,085.73	58.33	71.042		
7,300.00	7,290.15	6,126.11	6,126.11	26.23	82.92	-116.49	-260.14	-1,159.78	4,048.51	3,989.67	58.84	68.805		
7,400.00	7,390.15	6,126.11	6,126.11	26.59	82.92	-116.49	-260.14	-1,159.78	3,953.19	3,893.82	59.37	66.586		
7,500.00	7,490.15	6,126.11	6,126.11	26.94	82.92	-116.49	-260.14	-1,159.78	3,858.10	3,798.17	59.92	64.386		
7,600.00	7,590.15	6,126.11	6,126.11	27.29	82.92	-116.49	-260.14	-1,159.78	3,763.26	3,702.76	60.50	62.205		
7,700.00	7,690.15	6,126.11	6,126.11	27.65	82.92	-116.49	-260.14	-1,159.78	3,668.70	3,607.60	61.10	60.043		
7,800.00	7,790.15	6,126.11	6,126.11	28.00	82.92	-116.49	-260.14	-1,159.78	3,574.44	3,512.70	61.73	57.902		
7,900.00	7,890.15	6,126.11	6,126.11	28.35	82.92	-116.49	-260.14	-1,159.78	3,480.49	3,418.10	62.40	55.781		
8,000.00	7,990.15	6,126.11	6,126.11	28.71	82.92	-116.49	-260.14	-1,159.78	3,386.89	3,323.80	63.09	53.683		
8,100.00	8,090.15	6,126.11	6,126.11	29.06	82.92	-116.49	-260.14	-1,159.78	3,293.67	3,229.85	63.82	51.606		
8,200.00	8,190.15	6,126.11	6,126.11	29.41	82.92	-116.49	-260.14	-1,159.78	3,200.86	3,136.27	64.59	49.553		
8,300.00	8,290.15	6,126.11	6,126.11	29.77	82.92	-116.49	-260.14	-1,159.78	3,108.49	3,043.09	65.41	47.524		
8,400.00	8,390.15	6,126.11	6,126.11	30.12	82.92	-116.49	-260.14	-1,159.78	3,016.61	2,950.35	66.27	45.520		
8,500.00	8,490.15	6,126.11	6,126.11	30.48	82.92	-116.49	-260.14	-1,159.78	2,925.27	2,858.09	67.18	43.543		
8,600.00	8,590.15	6,126.11	6,126.11	30.83	82.92	-116.49	-260.14	-1,159.78	2,834.51	2,766.36	68.15	41.593		
8,700.00	8,690.15	6,126.11	6,126.11	31.18	82.92	-116.49	-260.14	-1,159.78	2,744.39	2,675.21	69.18	39.672		
8,800.00	8,790.15	6,126.11	6,126.11	31.54	82.92	-116.49	-260.14	-1,159.78	2,654.97	2,584.70	70.27	37.782		
8,900.00	8,890.15	6,126.11	6,126.11	31.89	82.92	-116.49	-260.14	-1,159.78	2,566.34	2,494.91	71.44	35.925		
9,000.00	8,990.15	6,126.11	6,126.11	32.25	82.92	-116.49	-260.14	-1,159.78	2,478.58	2,405.90	72.68	34.103		
9,100.00	9,090.15	6,126.11	6,126.11	32.60	82.92	-116.49	-260.14	-1,159.78	2,391.77	2,317.76	74.01	32.317		
9,200.00	9,190.15	6,126.11	6,126.11	32.96	82.92	-116.49	-260.14	-1,159.78	2,306.03	2,230.60	75.43	30.571		
9,300.00	9,290.15	6,126.11	6,126.11	33.31	82.92	-116.49	-260.14	-1,159.78	2,221.49	2,144.54	76.96	28.867		
9,400.00	9,390.15	6,126.11	6,126.11	33.67	82.92	-116.49	-260.14	-1,159.78	2,138.28	2,059.69	78.59	27.209		
9,500.00	9,490.15	6,126.11	6,126.11	34.02	82.92	-116.49	-260.14	-1,159.78	2,056.57	1,976.23	80.34	25.599		
9,600.00	9,590.15	6,126.11	6,126.11	34.38	82.92	-116.49	-260.14	-1,159.78	1,976.54	1,894.33	82.21	24.042		
9,700.00	9,690.15	6,126.11	6,126.11	34.73	82.92	-116.49	-260.14	-1,159.78	1,898.40	1,814.19	84.21	22.542		
9,800.00	9,790.15	6,126.11	6,126.11	35.09	82.92	-116.49	-260.14	-1,159.78	1,822.41	1,736.05	86.35	21.104		
9,900.00	9,890.15	6,126.11	6,126.11	35.44	82.92	-116.49	-260.14	-1,159.78	1,748.83	1,660.20	88.63	19.732		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design: Roy Batty Federal COM - Roy Batty Federal COM #3H - Wellbore #1 - Surveys												Offset Site Error:	0.00 usft
Survey Program: 100-GYRO-NS, 10518-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
10,000.00	9,990.15	15,392.00	11,126.11	35.80	82.92	-116.49	-260.14	-1,159.78	1,677.98	1,586.94	91.04	18.431	
10,100.00	10,090.15	15,392.00	11,126.11	36.15	82.92	-116.49	-260.14	-1,159.78	1,610.23	1,516.65	93.58	17.206	
10,200.00	10,190.15	15,392.00	11,126.11	36.51	82.92	-116.49	-260.14	-1,159.78	1,545.99	1,449.75	96.24	16.065	
10,300.00	10,290.15	15,392.00	11,126.11	36.86	82.92	-116.49	-260.14	-1,159.78	1,485.70	1,386.73	98.97	15.011	
10,400.00	10,390.15	15,392.00	11,126.11	37.22	82.92	-116.49	-260.14	-1,159.78	1,429.87	1,328.11	101.76	14.051	
10,500.00	10,490.15	15,392.00	11,126.11	37.57	82.92	-116.49	-260.14	-1,159.78	1,379.05	1,274.51	104.54	13.191	
10,600.00	10,590.15	15,392.00	11,126.11	37.93	82.92	-116.49	-260.14	-1,159.78	1,333.79	1,226.54	107.25	12.436	
10,700.00	10,690.15	15,392.00	11,126.11	38.29	82.92	-116.49	-260.14	-1,159.78	1,294.69	1,184.89	109.80	11.791	
10,800.00	10,790.15	15,392.00	11,126.11	38.64	82.92	-116.49	-260.14	-1,159.78	1,262.32	1,150.21	112.11	11.260	
10,900.00	10,890.15	15,392.00	11,126.11	39.00	82.92	-116.49	-260.14	-1,159.78	1,237.21	1,123.14	114.07	10.846	
11,000.00	10,990.15	15,392.00	11,126.11	39.35	82.92	-116.49	-260.14	-1,159.78	1,219.80	1,104.20	115.60	10.552	
11,100.00	11,090.15	15,392.00	11,126.11	39.71	82.92	-116.49	-260.14	-1,159.78	1,210.43	1,093.81	116.62	10.379	
11,163.86	11,154.01	15,392.00	11,126.11	39.94	82.92	-116.49	-260.14	-1,159.78	1,208.74	1,091.76	116.98	10.333	
11,200.00	11,190.15	15,392.00	11,126.11	40.07	82.92	-116.49	-260.14	-1,159.78	1,209.29	1,092.20	117.09	10.328 SF	
11,300.00	11,290.15	15,392.00	11,126.11	40.42	82.92	-116.49	-260.14	-1,159.78	1,216.39	1,099.38	117.00	10.396	
11,400.00	11,390.15	15,392.00	11,126.11	40.78	82.92	-116.49	-260.14	-1,159.78	1,231.60	1,115.21	116.39	10.582	
11,400.89	11,391.04	15,392.00	11,126.11	40.78	82.92	-116.49	-260.14	-1,159.78	1,231.77	1,115.39	116.38	10.584	
11,450.00	11,440.09	15,392.00	11,126.11	40.94	82.92	-116.41	-260.14	-1,159.78	1,240.89	1,124.97	115.92	10.705	
11,500.00	11,489.66	15,392.00	11,126.11	41.09	82.92	-116.17	-260.14	-1,159.78	1,249.46	1,134.07	115.39	10.828	
11,550.00	11,538.47	15,392.00	11,126.11	41.24	82.92	-115.76	-260.14	-1,159.78	1,257.27	1,142.45	114.82	10.950	
11,600.00	11,586.17	15,392.00	11,126.11	41.37	82.92	-115.18	-260.14	-1,159.78	1,264.26	1,150.06	114.20	11.071	
11,650.00	11,632.38	15,392.00	11,126.11	41.50	82.92	-114.44	-260.14	-1,159.78	1,270.40	1,156.85	113.55	11.188	
11,700.00	11,676.75	15,392.00	11,126.11	41.61	82.92	-113.52	-260.14	-1,159.78	1,275.65	1,162.79	112.86	11.303	
11,750.00	11,718.95	15,392.00	11,126.11	41.72	82.92	-112.42	-260.14	-1,159.78	1,279.99	1,167.84	112.16	11.413	
11,800.00	11,758.65	15,392.00	11,126.11	41.81	82.92	-111.14	-260.14	-1,159.78	1,283.39	1,171.96	111.44	11.517	
11,850.00	11,795.55	15,392.00	11,126.11	41.90	82.92	-109.67	-260.14	-1,159.78	1,285.84	1,175.13	110.71	11.614	
11,900.00	11,829.38	15,392.00	11,126.11	41.99	82.92	-108.02	-260.14	-1,159.78	1,287.31	1,177.32	109.99	11.704	
11,950.00	11,859.87	15,392.00	11,126.11	42.08	82.92	-106.18	-260.14	-1,159.78	1,287.80	1,178.52	109.28	11.784	
12,000.00	11,886.79	15,392.00	11,126.11	42.18	82.92	-104.16	-260.14	-1,159.78	1,287.32	1,178.72	108.60	11.854	
12,050.00	11,909.94	15,392.00	11,126.11	42.28	82.92	-101.95	-260.14	-1,159.78	1,285.85	1,177.90	107.95	11.912	
12,100.00	11,929.14	15,392.00	11,126.11	42.38	82.92	-99.58	-260.14	-1,159.78	1,283.42	1,176.07	107.34	11.956	
12,150.00	11,944.24	15,392.00	11,126.11	42.49	82.92	-97.04	-260.14	-1,159.78	1,280.02	1,173.23	106.79	11.986	
12,200.00	11,955.14	15,392.00	11,126.11	42.60	82.92	-94.37	-260.14	-1,159.78	1,275.69	1,169.39	106.31	12.000	
12,250.00	11,961.74	15,359.32	11,127.68	42.71	82.43	-93.48	-292.78	-1,159.11	1,270.04	1,164.49	105.56	12.032	
12,300.00	11,964.00	15,308.37	11,130.06	42.82	81.67	-93.64	-343.65	-1,157.92	1,261.66	1,156.93	104.73	12.046	
12,300.89	11,964.00	15,307.47	11,130.10	42.82	81.66	-93.64	-344.56	-1,157.89	1,261.48	1,156.76	104.72	12.046	
12,400.00	11,964.00	15,222.25	11,133.65	43.07	80.39	-92.97	-429.68	-1,155.88	1,243.65	1,140.19	103.45	12.021	
12,500.00	11,964.00	15,119.22	11,137.73	43.38	78.87	-93.26	-532.61	-1,153.96	1,228.80	1,126.66	102.14	12.031	
12,600.00	11,964.00	15,031.88	11,141.23	43.75	77.59	-92.55	-619.86	-1,152.44	1,216.67	1,115.53	101.15	12.029	
12,700.00	11,964.00	14,934.94	11,144.37	44.17	76.17	-92.40	-716.74	-1,151.10	1,207.93	1,107.74	100.19	12.056	
12,800.00	11,964.00	14,829.97	11,148.35	44.64	74.65	-92.72	-821.63	-1,149.90	1,201.64	1,102.32	99.32	12.099	
12,883.71	11,964.00	14,758.15	11,150.38	45.07	73.61	-91.97	-893.41	-1,148.69	1,198.59	1,099.74	98.85	12.126	
12,900.00	11,964.00	14,744.31	11,150.65	45.15	73.41	-91.82	-907.25	-1,148.47	1,198.27	1,099.51	98.76	12.133	
13,000.00	11,964.00	14,663.89	11,151.08	45.72	72.25	-90.58	-987.66	-1,147.12	1,197.24	1,098.95	98.29	12.181	
13,100.00	11,964.00	14,529.18	11,151.88	46.34	70.33	-92.78	-1,122.31	-1,144.55	1,196.11	1,098.89	97.22	12.303	
13,200.00	11,964.00	14,436.00	11,154.52	47.01	69.01	-92.35	-1,215.44	-1,142.66	1,193.30	1,096.55	96.76	12.333	
13,300.00	11,964.00	14,343.06	11,156.19	47.73	67.70	-91.90	-1,308.34	-1,140.71	1,191.11	1,094.80	96.31	12.367	
13,400.00	11,964.00	14,243.53	11,157.12	48.49	66.31	-91.87	-1,407.83	-1,138.18	1,189.16	1,093.36	95.80	12.414	
13,500.00	11,964.00	14,146.37	11,157.22	49.30	64.96	-91.69	-1,504.95	-1,135.43	1,187.52	1,092.20	95.32	12.458	
13,600.00	11,964.00	14,046.02	11,156.47	50.14	63.59	-91.71	-1,605.21	-1,131.22	1,185.42	1,090.63	94.79	12.506	
13,670.88	11,964.00	13,995.02	11,155.44	50.77	62.89	-90.44	-1,656.16	-1,129.37	1,184.83	1,090.13	94.69	12.512	
13,700.00	11,964.00	13,970.75	11,154.76	51.03	62.56	-90.12	-1,680.42	-1,128.69	1,184.92	1,090.31	94.61	12.524	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #3H - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 100-GYRO-NS, 10518-MWD													Offset Well Error:	0.00 usft
Reference	Offset		Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
13,800.00	11,964.00	13,846.15	11,151.15	51.95	60.88	-91.70	-1,804.84	-1,123.23	1,184.07	1,090.31	93.76	12.628		
13,900.00	11,964.00	13,726.87	11,148.83	52.91	59.30	-92.95	-1,923.91	-1,116.61	1,181.82	1,088.80	93.02	12.705		
14,000.00	11,964.00	13,621.44	11,146.92	53.91	57.91	-93.31	-2,029.04	-1,108.81	1,178.08	1,085.62	92.46	12.741		
14,100.00	11,964.00	13,482.88	11,146.90	54.93	56.12	-95.87	-2,167.11	-1,097.40	1,172.48	1,081.00	91.48	12.816		
14,200.00	11,964.00	13,396.99	11,146.87	55.99	55.03	-94.95	-2,252.62	-1,089.27	1,166.07	1,074.77	91.30	12.772		
14,300.00	11,964.00	13,311.21	11,145.71	57.07	53.95	-94.02	-2,338.04	-1,081.51	1,160.90	1,069.76	91.13	12.739		
14,400.00	11,964.00	13,220.36	11,143.34	58.18	52.84	-93.40	-2,428.50	-1,073.50	1,156.79	1,065.89	90.90	12.727		
14,500.00	11,964.00	13,075.81	11,142.87	59.32	51.11	-96.47	-2,572.41	-1,060.11	1,150.72	1,060.78	89.94	12.794		
14,600.00	11,964.00	12,967.56	11,146.07	60.48	49.85	-97.08	-2,680.15	-1,050.08	1,142.51	1,052.84	89.67	12.741		
14,700.00	11,964.00	12,889.74	11,148.93	61.66	48.97	-95.56	-2,757.66	-1,043.88	1,134.84	1,044.91	89.94	12.618		
14,800.00	11,964.00	12,814.01	11,149.86	62.86	48.13	-93.87	-2,833.21	-1,038.79	1,129.66	1,039.43	90.23	12.520		
14,900.00	11,964.00	12,724.52	11,149.21	64.09	47.16	-93.14	-2,922.50	-1,032.80	1,125.89	1,035.58	90.31	12.466		
15,000.00	11,964.00	12,629.76	11,148.01	65.33	46.17	-92.77	-3,017.05	-1,026.71	1,122.73	1,032.38	90.36	12.425		
15,100.00	11,964.00	12,535.75	11,148.23	66.59	45.23	-92.34	-3,110.98	-1,022.79	1,120.14	1,029.59	90.56	12.369		
15,200.00	11,964.00	12,433.86	11,148.25	67.87	44.24	-92.48	-3,212.79	-1,018.73	1,117.84	1,027.14	90.71	12.324		
15,300.00	11,964.00	12,323.93	11,149.02	69.16	43.23	-93.21	-3,322.61	-1,013.93	1,114.79	1,023.97	90.81	12.275		
15,400.00	11,964.00	12,228.01	11,149.84	70.47	42.39	-92.92	-3,418.41	-1,009.35	1,111.35	1,020.22	91.13	12.195		
15,500.00	11,964.00	12,152.01	11,149.11	71.79	41.76	-91.16	-3,494.32	-1,005.52	1,109.10	1,017.44	91.66	12.100		
15,527.35	11,964.00	12,134.57	11,148.71	72.16	41.62	-90.44	-3,511.74	-1,004.87	1,108.98	1,017.12	91.85	12.073 CC, ES		
15,600.00	11,964.00	12,086.44	11,147.09	73.13	41.23	-88.63	-3,559.82	-1,003.71	1,109.84	1,017.50	92.34	12.020		
15,700.00	11,964.00	11,968.36	11,143.83	74.47	40.35	-89.96	-3,677.83	-1,001.31	1,110.86	1,018.34	92.52	12.007		
15,800.00	11,964.00	11,872.67	11,142.88	75.83	39.70	-89.64	-3,773.51	-1,000.97	1,111.84	1,018.75	93.09	11.944		
15,900.00	11,964.00	11,768.69	11,143.43	77.21	39.04	-89.93	-3,877.49	-1,001.58	1,112.39	1,018.68	93.72	11.870		
16,000.00	11,964.00	11,674.39	11,145.47	78.59	38.51	-89.51	-3,971.73	-1,004.23	1,113.36	1,018.77	94.59	11.770		
16,100.00	11,964.00	11,573.87	11,146.87	79.98	38.01	-89.55	-4,072.21	-1,006.48	1,114.50	1,019.05	95.45	11.677		
16,200.00	11,964.00	11,489.73	11,147.01	81.38	37.63	-88.40	-4,156.34	-1,007.59	1,115.91	1,019.53	96.39	11.577		
16,300.00	11,964.00	11,429.00	11,144.60	82.80	37.38	-85.56	-4,217.02	-1,008.04	1,119.94	1,022.55	97.39	11.499		
16,400.00	11,964.00	11,374.66	11,139.37	84.22	37.19	-82.27	-4,271.09	-1,008.43	1,127.89	1,029.57	98.32	11.471		
16,500.00	11,964.00	11,335.00	11,133.25	85.65	37.07	-78.02	-4,310.27	-1,008.61	1,140.26	1,041.03	99.23	11.491		
16,600.00	11,964.00	11,303.00	11,126.03	87.08	36.97	-73.36	-4,341.44	-1,008.67	1,158.02	1,058.00	100.02	11.578		
16,700.00	11,964.00	11,272.00	11,116.55	88.53	36.89	-68.82	-4,370.94	-1,008.62	1,181.51	1,080.88	100.63	11.741		
16,740.74	11,964.00	11,255.08	11,110.44	89.12	36.85	-67.28	-4,386.72	-1,008.54	1,192.62	1,091.84	100.78	11.834		
16,741.61	11,964.00	11,254.80	11,110.34	89.14	36.85	-67.24	-4,386.98	-1,008.54	1,192.87	1,092.49	100.38	11.883		



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #4H - Wellbore #1 - Surveys													Offset Site Error: 0.00 usft	
Survey Program: 100-GYRO-NS, 10554-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Distance							Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	0.00	0.00	0.00	0.00	175.36	-4,758.90	386.07	4,774.63					
100.00	100.00	96.01	96.01	0.13	0.14	175.37	-4,758.66	385.75	4,774.34	4,774.07	0.27	N/A		
200.00	200.00	180.69	180.68	0.49	0.43	175.37	-4,758.36	385.16	4,773.94	4,773.03	0.91	5,222.652		
300.00	300.00	274.88	274.87	0.85	0.76	175.38	-4,758.28	384.57	4,773.80	4,772.20	1.60	2,980.888		
400.00	400.00	373.23	373.22	1.20	1.10	175.39	-4,758.24	384.03	4,773.72	4,771.41	2.30	2,072.707		
500.00	500.00	470.93	470.92	1.56	1.44	175.39	-4,758.24	383.49	4,773.67	4,770.67	3.00	1,589.903		
600.00	600.00	592.35	592.34	1.92	1.87	175.40	-4,758.06	382.97	4,773.50	4,769.71	3.78	1,261.231		
629.30	629.30	623.16	623.15	2.03	1.98	175.40	-4,757.91	382.85	4,773.43	4,769.43	4.00	1,194.120		
700.00	699.99	692.91	692.90	2.28	2.22	175.40	-4,757.59	382.58	4,773.86	4,769.37	4.49	1,062.156		
800.00	799.96	795.66	795.64	2.64	2.58	175.40	-4,757.10	382.23	4,775.92	4,770.71	5.21	916.247		
900.00	899.86	884.82	884.80	3.00	2.89	175.39	-4,756.72	382.03	4,779.77	4,773.89	5.88	812.366		
1,000.00	999.68	978.84	978.82	3.36	3.22	175.38	-4,756.51	381.89	4,785.52	4,778.95	6.57	728.121		
1,000.15	999.83	978.98	978.97	3.36	3.22	175.38	-4,756.50	381.89	4,785.53	4,778.96	6.57	728.004		
1,100.00	1,099.43	1,079.51	1,079.49	3.72	3.58	175.36	-4,756.33	381.67	4,792.18	4,784.90	7.28	657.925		
1,200.00	1,199.19	1,185.79	1,185.77	4.08	3.95	175.35	-4,756.07	381.33	4,798.76	4,790.75	8.01	598.763		
1,300.00	1,298.94	1,286.13	1,286.11	4.45	4.30	175.34	-4,755.74	380.89	4,805.25	4,796.53	8.72	550.753		
1,400.00	1,398.70	1,388.53	1,388.51	4.82	4.66	175.33	-4,755.39	380.35	4,811.72	4,802.28	9.44	509.562		
1,500.00	1,498.46	1,510.46	1,510.44	5.19	5.09	175.33	-4,754.69	379.51	4,817.95	4,807.72	10.23	470.973		
1,600.00	1,598.21	1,623.51	1,623.47	5.56	5.48	175.32	-4,753.59	378.15	4,823.72	4,812.74	10.99	439.067		
1,700.00	1,697.97	1,713.85	1,713.80	5.93	5.80	175.32	-4,752.76	377.04	4,829.56	4,817.89	11.66	414.083		
1,800.00	1,797.72	1,823.45	1,823.39	6.30	6.18	175.32	-4,751.68	375.90	4,835.34	4,822.93	12.41	389.696		
1,900.00	1,897.48	1,926.20	1,926.12	6.67	6.54	175.31	-4,750.54	374.90	4,841.01	4,827.88	13.13	368.733		
2,000.00	1,997.24	2,023.17	2,023.09	7.04	6.88	175.31	-4,749.42	373.96	4,846.64	4,832.81	13.83	350.459		
2,100.00	2,096.99	2,107.17	2,107.09	7.41	7.18	175.30	-4,748.64	373.36	4,852.51	4,838.03	14.48	335.021		
2,200.00	2,196.75	2,200.00	2,199.91	7.78	7.50	175.29	-4,747.96	372.92	4,858.60	4,843.43	15.17	320.275		
2,300.00	2,296.51	2,295.06	2,294.97	8.15	7.84	175.28	-4,747.38	372.49	4,864.81	4,848.94	15.86	306.660		
2,400.00	2,396.26	2,399.59	2,399.49	8.52	8.20	175.27	-4,746.77	371.92	4,871.03	4,854.44	16.59	293.592		
2,500.00	2,496.02	2,502.24	2,502.14	8.89	8.56	175.26	-4,746.08	371.33	4,877.17	4,859.86	17.31	281.723		
2,600.00	2,595.77	2,609.62	2,609.52	9.26	8.94	175.25	-4,745.24	370.73	4,883.20	4,865.15	18.05	270.541		
2,700.00	2,695.53	2,707.00	2,706.89	9.63	9.28	175.24	-4,744.43	370.18	4,889.18	4,870.43	18.75	260.728		
2,800.00	2,795.29	2,800.00	2,799.88	10.01	9.61	175.23	-4,743.65	369.80	4,895.18	4,875.74	19.44	251.825		
2,900.00	2,895.04	2,890.68	2,890.56	10.38	9.93	175.21	-4,743.02	369.64	4,901.33	4,881.21	20.12	243.638		
3,000.00	2,994.80	2,984.94	2,984.82	10.75	10.26	175.20	-4,742.61	369.50	4,907.73	4,886.93	20.81	235.853		
3,100.00	3,094.56	3,096.41	3,096.29	11.12	10.65	175.18	-4,742.06	369.29	4,914.09	4,892.52	21.56	227.911		
3,200.00	3,194.31	3,186.17	3,186.04	11.49	10.96	175.17	-4,741.56	369.26	4,920.39	4,898.15	22.24	221.275		
3,300.00	3,294.07	3,300.77	3,300.65	11.87	11.36	175.15	-4,740.90	369.50	4,926.69	4,903.69	23.00	214.196		
3,400.00	3,393.82	3,394.35	3,394.22	12.24	11.69	175.13	-4,740.24	369.75	4,932.87	4,909.18	23.69	208.230		
3,500.00	3,493.58	3,502.44	3,502.31	12.61	12.06	175.11	-4,739.46	370.03	4,939.03	4,914.60	24.43	202.166		
3,600.00	3,593.34	3,603.81	3,603.67	12.98	12.42	175.09	-4,738.62	370.27	4,945.09	4,919.94	25.15	196.644		
3,700.00	3,693.09	3,700.00	3,699.86	13.36	12.75	175.08	-4,737.88	370.52	4,951.19	4,925.35	25.85	191.568		
3,800.00	3,792.85	3,804.32	3,804.18	13.73	13.12	175.06	-4,737.04	370.89	4,957.29	4,930.71	26.57	186.553		
3,900.00	3,892.61	3,900.00	3,899.85	14.10	13.45	175.04	-4,736.28	371.26	4,963.39	4,936.12	27.27	182.013		
4,000.00	3,992.36	3,966.73	3,966.58	14.47	13.69	175.02	-4,736.01	371.45	4,969.85	4,941.99	27.86	178.393		
4,100.00	4,092.12	4,034.65	4,034.50	14.85	13.92	175.00	-4,736.16	371.50	4,976.94	4,948.49	28.45	174.931		
4,200.00	4,191.87	4,100.00	4,099.85	15.22	14.15	174.99	-4,736.72	371.64	4,984.68	4,955.65	29.03	171.699		
4,300.00	4,291.63	4,195.96	4,195.81	15.59	14.48	174.97	-4,737.91	371.91	4,992.79	4,963.07	29.72	167.972		
4,400.00	4,391.39	4,288.15	4,287.99	15.96	14.80	174.95	-4,739.17	372.23	5,001.04	4,970.64	30.40	164.493		
4,500.00	4,491.14	4,369.64	4,369.47	16.34	15.08	174.94	-4,740.46	372.65	5,009.53	4,978.49	31.04	161.381		
4,600.00	4,590.90	4,446.25	4,446.06	16.71	15.34	174.92	-4,741.99	373.17	5,018.43	4,986.77	31.66	158.501		
4,700.00	4,690.66	4,523.62	4,523.39	17.08	15.61	174.89	-4,743.85	374.31	5,027.81	4,995.52	32.28	155.735		
4,800.00	4,790.41	4,608.33	4,608.05	17.45	15.90	174.86	-4,746.12	376.29	5,037.54	5,004.60	32.93	152.956		
4,818.08	4,808.45	4,623.78	4,623.49	17.52	15.96	174.85	-4,746.55	376.71	5,039.33	5,006.27	33.05	152.464		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #4H - Wellbore #1 - Surveys														Offset Site Error:	0.00 usft
Survey Program: 100-GYRO-NS, 10554-MWD														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
4,900.00	4,890.22	4,700.00	4,699.64	17.82	16.22	174.82	-4,748.80	378.94	5,046.69	5,013.08	33.61	150.152			
5,000.00	4,990.16	4,868.57	4,868.09	18.18	16.81	174.76	-4,752.49	384.11	5,052.60	5,018.02	34.58	146.124			
5,084.85	5,075.00	4,970.62	4,970.10	18.48	17.16	174.72	-4,753.90	386.83	5,054.89	5,019.65	35.24	143.443			
5,100.00	5,090.15	4,987.75	4,987.22	18.53	17.22	174.72	-4,754.11	387.23	5,055.11	5,019.76	35.35	142.987			
5,200.00	5,190.15	5,111.19	5,110.63	18.88	17.65	174.69	-4,755.41	389.54	5,056.33	5,020.19	36.14	139.894			
5,300.00	5,290.15	5,200.49	5,199.91	19.23	17.96	174.68	-4,756.30	390.71	5,057.44	5,020.64	36.81	137.404			
5,400.00	5,390.15	5,309.26	5,308.68	19.57	18.34	174.67	-4,757.40	391.82	5,058.55	5,021.00	37.54	134.740			
5,500.00	5,490.15	5,418.04	5,417.45	19.92	18.72	174.66	-4,758.32	392.82	5,059.48	5,021.20	38.28	132.174			
5,600.00	5,590.15	5,526.68	5,526.08	20.27	19.10	174.65	-4,759.06	393.71	5,060.23	5,021.22	39.01	129.701			
5,700.00	5,690.15	5,631.61	5,631.01	20.62	19.47	174.64	-4,759.60	394.74	5,060.83	5,021.10	39.74	127.360			
5,800.00	5,790.15	5,726.89	5,726.28	20.97	19.80	174.63	-4,760.09	395.64	5,061.43	5,021.01	40.42	125.212			
5,900.00	5,890.15	5,822.90	5,822.28	21.32	20.13	174.62	-4,760.72	396.79	5,062.20	5,021.09	41.11	123.131			
6,000.00	5,990.15	15,556.00	10,899.41	21.67	86.51	124.26	-18.08	358.24	4,967.47	4,915.47	52.00	95.536			
6,100.00	6,090.15	15,556.00	10,899.41	22.02	86.51	124.26	-18.08	358.24	4,868.05	4,815.83	52.22	93.222			
6,200.00	6,190.15	15,556.00	10,899.41	22.37	86.51	124.26	-18.08	358.24	4,768.65	4,716.20	52.45	90.920			
6,300.00	6,290.15	15,556.00	10,899.41	22.72	86.51	124.26	-18.08	358.24	4,669.28	4,616.60	52.68	88.631			
6,400.00	6,390.15	15,556.00	10,899.41	23.07	86.51	124.26	-18.08	358.24	4,569.93	4,517.01	52.92	86.355			
6,500.00	6,490.15	15,556.00	10,899.41	23.42	86.51	124.26	-18.08	358.24	4,470.62	4,417.45	53.16	84.091			
6,600.00	6,590.15	15,556.00	10,899.41	23.77	86.51	124.26	-18.08	358.24	4,371.33	4,317.92	53.41	81.841			
6,700.00	6,690.15	15,556.00	10,899.41	24.12	86.51	124.26	-18.08	358.24	4,272.08	4,218.41	53.67	79.603			
6,800.00	6,790.15	15,556.00	10,899.41	24.47	86.51	124.26	-18.08	358.24	4,172.86	4,118.94	53.93	77.379			
6,900.00	6,890.15	15,556.00	10,899.41	24.83	86.51	124.26	-18.08	358.24	4,073.69	4,019.49	54.19	75.169			
7,000.00	6,990.15	15,556.00	10,899.41	25.18	86.51	124.26	-18.08	358.24	3,974.55	3,920.08	54.47	72.972			
7,100.00	7,090.15	15,556.00	10,899.41	25.53	86.51	124.26	-18.08	358.24	3,875.46	3,820.71	54.75	70.789			
7,200.00	7,190.15	15,556.00	10,899.41	25.88	86.51	124.26	-18.08	358.24	3,776.42	3,721.38	55.03	68.621			
7,300.00	7,290.15	15,556.00	10,899.41	26.23	86.51	124.26	-18.08	358.24	3,677.42	3,622.09	55.33	66.466			
7,400.00	7,390.15	15,556.00	10,899.41	26.59	86.51	124.26	-18.08	358.24	3,578.49	3,522.86	55.63	64.325			
7,500.00	7,490.15	15,556.00	10,899.41	26.94	86.51	124.26	-18.08	358.24	3,479.61	3,423.67	55.94	62.199			
7,600.00	7,590.15	15,556.00	10,899.41	27.29	86.51	124.26	-18.08	358.24	3,380.80	3,324.54	56.27	60.087			
7,700.00	7,690.15	15,556.00	10,899.41	27.65	86.51	124.26	-18.08	358.24	3,282.07	3,225.47	56.60	57.989			
7,800.00	7,790.15	15,556.00	10,899.41	28.00	86.51	124.26	-18.08	358.24	3,183.41	3,126.47	56.94	55.906			
7,900.00	7,890.15	15,556.00	10,899.41	28.35	86.51	124.26	-18.08	358.24	3,084.84	3,027.54	57.30	53.838			
8,000.00	7,990.15	15,556.00	10,899.41	28.71	86.51	124.26	-18.08	358.24	2,986.36	2,928.69	57.67	51.785			
8,100.00	8,090.15	15,556.00	10,899.41	29.06	86.51	124.26	-18.08	358.24	2,887.99	2,829.93	58.05	49.746			
8,200.00	8,190.15	15,556.00	10,899.41	29.41	86.51	124.26	-18.08	358.24	2,789.73	2,731.27	58.46	47.723			
8,300.00	8,290.15	15,556.00	10,899.41	29.77	86.51	124.26	-18.08	358.24	2,691.60	2,632.72	58.88	45.715			
8,400.00	8,390.15	15,556.00	10,899.41	30.12	86.51	124.26	-18.08	358.24	2,593.62	2,534.30	59.32	43.721			
8,500.00	8,490.15	15,556.00	10,899.41	30.48	86.51	124.26	-18.08	358.24	2,495.79	2,436.01	59.79	41.744			
8,600.00	8,590.15	15,556.00	10,899.41	30.83	86.51	124.26	-18.08	358.24	2,398.15	2,337.86	60.28	39.781			
8,700.00	8,690.15	15,556.00	10,899.41	31.18	86.51	124.26	-18.08	358.24	2,300.71	2,239.90	60.81	37.835			
8,800.00	8,790.15	15,556.00	10,899.41	31.54	86.51	124.26	-18.08	358.24	2,203.49	2,142.12	61.37	35.904			
8,900.00	8,890.15	15,556.00	10,899.41	31.89	86.51	124.26	-18.08	358.24	2,106.54	2,044.56	61.98	33.989			
9,000.00	8,990.15	15,556.00	10,899.41	32.25	86.51	124.26	-18.08	358.24	2,009.88	1,947.25	62.63	32.091			
9,100.00	9,090.15	15,556.00	10,899.41	32.60	86.51	124.26	-18.08	358.24	1,913.57	1,850.23	63.34	30.210			
9,200.00	9,190.15	15,556.00	10,899.41	32.96	86.51	124.26	-18.08	358.24	1,817.66	1,753.54	64.12	28.346			
9,300.00	9,290.15	15,556.00	10,899.41	33.31	86.51	124.26	-18.08	358.24	1,722.21	1,657.23	64.99	26.502			
9,400.00	9,390.15	15,556.00	10,899.41	33.67	86.51	124.26	-18.08	358.24	1,627.31	1,561.37	65.95	24.677			
9,500.00	9,490.15	15,556.00	10,899.41	34.02	86.51	124.26	-18.08	358.24	1,533.06	1,466.04	67.02	22.873			
9,600.00	9,590.15	15,556.00	10,899.41	34.38	86.51	124.26	-18.08	358.24	1,439.58	1,371.34	68.25	21.093			
9,700.00	9,690.15	15,556.00	10,899.41	34.73	86.51	124.26	-18.08	358.24	1,347.05	1,277.40	69.65	19.340			
9,800.00	9,790.15	15,556.00	10,899.41	35.09	86.51	124.26	-18.08	358.24	1,255.65	1,184.38	71.27	17.618			
9,900.00	9,890.15	15,556.00	10,899.41	35.44	86.51	124.26	-18.08	358.24	1,165.67	1,092.51	73.16	15.933			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Roy Batty Federal COM - Roy Batty Federal COM #4H - Wellbore #1 - Surveys												Offset Site Error:	0.00 usft
Survey Program: 100-GYRO-NS 10554-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance		Minimum Separation		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,000.00	9,990.15	15,556.00	10,899.41	35.80	86.51	124.26	-18.08	358.24	1,077.46	1,002.08	75.38	14.293	
10,100.00	10,090.15	15,556.00	10,899.41	36.15	86.51	124.26	-18.08	358.24	991.49	913.47	78.02	12.709	
10,200.00	10,190.15	15,556.00	10,899.41	36.51	86.51	124.26	-18.08	358.24	908.39	827.24	81.15	11.194	
10,300.00	10,290.15	15,556.00	10,899.41	36.86	86.51	124.26	-18.08	358.24	829.04	744.17	84.87	9.769	
10,400.00	10,390.15	15,556.00	10,899.41	37.22	86.51	124.26	-18.08	358.24	754.61	665.36	89.24	8.456	
10,500.00	10,490.15	15,556.00	10,899.41	37.57	86.51	124.26	-18.08	358.24	686.70	592.44	94.27	7.285	
10,600.00	10,590.15	15,556.00	10,899.41	37.93	86.51	124.26	-18.08	358.24	627.45	527.68	99.77	6.289	
10,700.00	10,690.15	15,556.00	10,899.41	38.29	86.51	124.26	-18.08	358.24	579.50	474.23	105.27	5.505	
10,800.00	10,790.15	15,556.00	10,899.41	38.64	86.51	124.26	-18.08	358.24	545.85	435.90	109.95	4.965	
10,900.00	10,890.15	15,556.00	10,899.41	39.00	86.51	124.26	-18.08	358.24	529.22	416.46	112.77	4.693	
10,939.36	10,929.51	15,556.00	10,899.41	39.14	86.51	124.26	-18.08	358.24	527.76	414.57	113.18	4.663 CC, ES, SF	
11,000.00	10,990.15	15,556.00	10,899.41	39.35	86.51	124.26	-18.08	358.24	531.23	418.23	113.00	4.701	
11,100.00	11,090.15	15,556.00	10,899.41	39.71	86.51	124.26	-18.08	358.24	551.67	440.95	110.71	4.983	
11,200.00	11,190.15	15,556.00	10,899.41	40.07	86.51	124.26	-18.08	358.24	588.61	481.91	106.70	5.516	
11,300.00	11,290.15	15,556.00	10,899.41	40.42	86.51	124.26	-18.08	358.24	639.21	537.23	101.98	6.268	
11,400.00	11,390.15	15,556.00	10,899.41	40.78	86.51	124.26	-18.08	358.24	700.51	603.20	97.32	7.198	
11,400.89	11,391.04	15,556.00	10,899.41	40.78	86.51	124.26	-18.08	358.24	701.10	603.82	97.28	7.207	
11,450.00	11,440.09	15,556.00	10,899.41	40.94	86.51	124.05	-18.08	358.24	733.73	638.54	95.19	7.708	
11,500.00	11,489.66	15,556.00	10,899.41	41.09	86.51	123.40	-18.08	358.24	767.36	674.07	93.29	8.226	
11,550.00	11,538.47	15,556.00	10,899.41	41.24	86.51	122.31	-18.08	358.24	801.11	709.50	91.60	8.745	
11,600.00	11,586.17	15,556.00	10,899.41	41.37	86.51	120.75	-18.08	358.24	834.72	744.59	90.13	9.262	
11,650.00	11,632.38	15,556.00	10,899.41	41.50	86.51	118.73	-18.08	358.24	867.97	779.13	88.84	9.770	
11,700.00	11,676.75	15,556.00	10,899.41	41.61	86.51	116.23	-18.08	358.24	900.66	812.94	87.73	10.267	
11,750.00	11,718.95	15,556.00	10,899.41	41.72	86.51	113.24	-18.08	358.24	932.62	845.84	86.78	10.747	
11,800.00	11,758.65	15,556.00	10,899.41	41.81	86.51	109.78	-18.08	358.24	963.68	877.69	85.99	11.207	
11,850.00	11,795.55	15,556.00	10,899.41	41.90	86.51	105.85	-18.08	358.24	993.71	908.36	85.34	11.644	
11,900.00	11,829.38	15,556.00	10,899.41	41.99	86.51	101.52	-18.08	358.24	1,022.57	937.73	84.83	12.054	
11,950.00	11,859.87	15,556.00	10,899.41	42.08	86.51	96.86	-18.08	358.24	1,050.15	965.69	84.46	12.434	
12,000.00	11,886.79	15,539.94	10,900.30	42.18	86.27	93.82	-34.10	358.91	1,076.23	992.10	84.13	12.792	
12,050.00	11,909.94	15,495.66	10,902.78	42.28	85.60	93.82	-78.27	360.76	1,099.42	1,015.62	83.80	13.120	
12,100.00	11,929.14	15,448.94	10,905.36	42.38	84.90	93.89	-124.88	362.64	1,119.19	1,035.63	83.56	13.394	
12,150.00	11,944.24	15,400.87	10,907.99	42.49	84.17	93.94	-172.84	364.41	1,135.38	1,051.99	83.40	13.614	
12,200.00	11,955.14	15,355.28	10,910.40	42.60	83.49	93.61	-218.35	366.00	1,147.97	1,064.63	83.34	13.775	
12,250.00	11,961.74	15,309.35	10,912.72	42.71	82.80	93.25	-264.19	367.60	1,156.95	1,073.58	83.37	13.877	
12,300.00	11,964.00	15,263.69	10,914.90	42.82	82.12	92.83	-309.76	369.21	1,162.33	1,078.82	83.50	13.919	
12,300.89	11,964.00	15,262.88	10,914.94	42.82	82.11	92.83	-310.57	369.24	1,162.39	1,078.88	83.51	13.920	
12,400.00	11,964.00	15,172.87	10,918.89	43.07	80.77	91.97	-400.44	372.52	1,168.98	1,085.18	83.80	13.950	
12,500.00	11,964.00	15,079.14	10,922.45	43.38	79.38	91.40	-494.04	376.07	1,174.80	1,090.86	83.94	13.996	
12,600.00	11,964.00	14,967.56	10,926.70	43.75	77.74	92.49	-605.47	379.92	1,178.93	1,095.09	83.84	14.061	
12,700.00	11,964.00	14,861.12	10,931.50	44.17	76.18	93.05	-711.78	382.04	1,179.98	1,096.37	83.61	14.112	
12,800.00	11,964.00	14,760.78	10,935.63	44.64	74.72	93.06	-812.02	383.39	1,179.27	1,095.99	83.28	14.160	
12,883.71	11,964.00	14,659.45	10,940.28	45.07	73.26	94.64	-913.24	384.23	1,176.73	1,093.93	82.80	14.212	
12,900.00	11,964.00	14,645.00	10,941.14	45.15	73.05	94.47	-927.66	384.38	1,175.94	1,093.20	82.74	14.212	
13,000.00	11,964.00	14,553.66	10,946.18	45.72	71.75	93.67	-1,018.86	385.41	1,171.49	1,089.11	82.38	14.220	
13,100.00	11,964.00	14,443.18	10,951.69	46.34	70.18	94.61	-1,129.19	386.23	1,167.28	1,085.37	81.91	14.251	
13,200.00	11,964.00	14,325.64	10,958.83	47.01	68.53	96.19	-1,246.52	385.56	1,161.39	1,079.98	81.40	14.267	
13,300.00	11,964.00	14,229.76	10,964.12	47.73	67.19	95.82	-1,342.24	383.81	1,155.34	1,074.32	81.03	14.259	
13,400.00	11,964.00	14,134.34	10,969.24	48.49	65.88	95.42	-1,437.50	382.19	1,149.51	1,068.82	80.69	14.245	
13,500.00	11,964.00	14,042.59	10,974.04	49.30	64.62	94.66	-1,529.12	381.62	1,144.37	1,063.91	80.46	14.223	
13,600.00	11,964.00	13,949.28	10,978.48	50.14	63.36	94.04	-1,622.33	381.31	1,139.78	1,059.53	80.24	14.204	
13,700.00	11,964.00	13,855.22	10,982.25	51.03	62.09	93.50	-1,716.31	381.09	1,135.87	1,055.82	80.05	14.190	
13,800.00	11,964.00	13,700.00	10,990.51	51.95	60.04	98.56	-1,871.28	379.61	1,130.91	1,051.43	79.48	14.230	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design: Roy Batty Federal COM - Roy Batty Federal COM #4H - Wellbore #1 - Surveys										Offset Site Error: 0.00 usft			
Survey Program: 100-GYRO-NS, 10554-MWD										Offset Well Error: 0.00 usft			
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
13,900.00	11,964.00	13,615.94	10,997.22	52.91	58.94	97.10	-1,955.05	377.92	1,122.76	1,043.30	79.45	14.131	
14,000.00	11,964.00	13,531.47	11,002.42	53.91	57.86	95.68	-2,039.35	376.46	1,116.23	1,036.80	79.43	14.053	
14,100.00	11,964.00	13,438.06	11,007.19	54.93	56.67	95.07	-2,132.62	375.09	1,110.74	1,031.37	79.37	13.995	
14,200.00	11,964.00	13,332.37	11,012.18	55.99	55.35	95.62	-2,238.18	372.97	1,105.28	1,026.06	79.22	13.952	
14,300.00	11,964.00	13,233.37	11,016.62	57.07	54.14	95.54	-2,337.03	370.00	1,099.46	1,020.34	79.12	13.897	
14,400.00	11,964.00	13,155.57	11,019.68	58.18	53.20	93.45	-2,414.75	368.46	1,094.68	1,015.46	79.22	13.818	
14,500.00	11,964.00	13,054.05	11,023.59	59.32	51.99	93.59	-2,516.20	368.72	1,091.19	1,011.92	79.27	13.765	
14,600.00	11,964.00	12,972.07	11,027.05	60.48	51.03	91.87	-2,598.09	369.71	1,087.96	1,008.44	79.52	13.682	
14,700.00	11,964.00	12,884.12	11,030.02	61.66	50.02	90.71	-2,685.95	372.51	1,086.46	1,006.66	79.80	13.614	
14,800.00	11,964.00	12,768.66	11,033.85	62.86	48.73	92.16	-2,801.29	375.97	1,084.99	1,005.01	79.98	13.566	
14,900.00	11,964.00	12,672.95	11,037.69	64.09	47.69	91.74	-2,896.90	378.14	1,082.52	1,002.24	80.28	13.484	
15,000.00	11,964.00	12,562.37	11,041.92	65.33	46.53	92.72	-3,007.38	380.19	1,079.97	999.44	80.53	13.410	
15,100.00	11,964.00	12,462.96	11,045.98	66.59	45.53	92.66	-3,106.70	381.38	1,076.85	995.98	80.86	13.317	
15,200.00	11,964.00	12,380.00	11,048.90	67.87	44.72	91.05	-3,189.60	382.33	1,074.23	992.94	81.29	13.215	
15,300.00	11,964.00	12,286.00	11,050.46	69.16	43.84	90.48	-3,283.58	383.39	1,073.07	991.42	81.65	13.142	
15,309.77	11,964.00	12,286.00	11,050.46	69.29	43.84	89.56	-3,283.58	383.39	1,073.03	991.29	81.73	13.128	
15,400.00	11,964.00	12,209.74	11,050.00	70.47	43.16	88.25	-3,359.84	384.19	1,073.62	991.53	82.09	13.079	
15,500.00	11,964.00	12,099.28	11,048.66	71.79	42.21	89.23	-3,470.28	385.11	1,074.69	992.34	82.35	13.051	
15,600.00	11,964.00	12,021.06	11,047.93	73.13	41.58	87.19	-3,548.48	386.43	1,075.99	993.14	82.85	12.987	
15,700.00	11,964.00	11,925.50	11,046.44	74.47	40.85	86.78	-3,643.97	389.66	1,078.75	995.39	83.36	12.941	
15,800.00	11,964.00	11,846.81	11,044.69	75.83	40.28	84.81	-3,722.59	392.58	1,082.31	998.36	83.96	12.891	
15,900.00	11,964.00	11,756.42	11,040.99	77.21	39.67	83.94	-3,812.81	396.72	1,087.81	1,003.28	84.53	12.869	
16,000.00	11,964.00	11,601.89	11,037.46	78.59	38.74	88.97	-3,967.20	401.48	1,091.07	1,006.12	84.95	12.844	
16,100.00	11,964.00	11,500.67	11,037.41	79.98	38.22	89.08	-4,068.40	403.52	1,091.82	1,006.20	85.62	12.751	
16,200.00	11,964.00	11,392.65	11,038.90	81.38	37.73	89.81	-4,176.37	406.22	1,091.67	1,005.27	86.40	12.635	
16,220.36	11,964.00	11,375.00	11,039.03	81.67	37.66	89.56	-4,194.02	406.48	1,091.63	1,005.07	86.56	12.612	
16,300.00	11,964.00	11,343.00	11,038.42	82.80	37.54	85.21	-4,226.00	407.04	1,093.35	1,006.11	87.24	12.533	
16,400.00	11,964.00	11,307.00	11,035.85	84.22	37.40	79.45	-4,261.88	408.33	1,100.69	1,012.63	88.06	12.500	
16,500.00	11,964.00	11,263.08	11,030.44	85.65	37.26	74.58	-4,305.41	410.57	1,113.32	1,024.51	88.80	12.537	
16,600.00	11,964.00	11,214.00	11,021.28	87.08	37.11	70.33	-4,353.53	413.43	1,131.10	1,041.66	89.44	12.647	
16,700.00	11,964.00	11,182.00	11,013.46	88.53	37.02	65.00	-4,384.50	415.32	1,153.67	1,063.62	90.05	12.812	
16,740.74	11,964.00	11,168.44	11,009.65	89.12	36.99	62.98	-4,397.49	416.09	1,164.32	1,074.05	90.27	12.899	
16,741.61	11,964.00	11,168.15	11,009.56	89.14	36.99	62.94	-4,397.76	416.11	1,164.56	1,074.88	89.68	12.986	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Tyrell Fee - 001H - Wellbore #1 - Surveys											Offset Site Error: 0.00 usft	
Survey Program: 100-MWD											Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Azimuth from North (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)				
0.00	0.00	0.00	0.00	0.00	0.00	178.70	-5,145.75	117.19	5,147.16			
100.00	100.00	101.84	101.84	0.13	0.15	178.70	-5,145.47	116.82	5,146.88	5,146.60	0.28 N/A	
200.00	200.00	206.15	206.14	0.49	0.53	178.71	-5,144.84	116.16	5,146.26	5,145.24	1.01 5,072.715	
300.00	300.00	300.00	299.99	0.85	0.86	178.71	-5,144.29	115.63	5,145.67	5,143.96	1.71 3,010.333	
400.00	400.00	391.77	391.76	1.20	1.19	178.72	-5,143.89	115.09	5,145.21	5,142.82	2.40 2,146.820	
500.00	500.00	492.35	492.34	1.56	1.55	178.73	-5,143.52	114.45	5,144.84	5,141.72	3.12 1,651.327	
600.00	600.00	588.22	588.21	1.92	1.90	178.73	-5,143.20	113.88	5,144.48	5,140.67	3.82 1,347.540	
617.43	617.43	604.91	604.89	1.98	1.96	178.73	-5,143.15	113.80	5,144.46	5,140.52	3.94 1,305.728	
700.00	699.99	684.53	684.51	2.28	2.24	178.74	-5,142.95	113.28	5,145.06	5,140.54	4.52 1,138.101	
800.00	799.96	785.65	785.63	2.64	2.60	178.74	-5,142.73	112.33	5,147.35	5,142.11	5.24 982.094	
900.00	899.86	877.94	877.91	3.00	2.93	178.74	-5,142.56	111.24	5,151.38	5,145.45	5.93 868.634	
1,000.00	999.68	962.70	962.67	3.36	3.24	178.74	-5,142.61	110.06	5,157.31	5,150.72	6.59 782.291	
1,000.15	999.83	962.83	962.79	3.36	3.24	178.74	-5,142.61	110.06	5,157.32	5,150.73	6.59 782.173	
1,100.00	1,099.43	1,046.01	1,045.96	3.72	3.53	178.73	-5,142.92	108.65	5,164.42	5,157.17	7.25 712.482	
1,200.00	1,199.19	1,139.46	1,139.39	4.08	3.87	178.73	-5,143.55	106.68	5,171.80	5,163.85	7.94 651.343	
1,300.00	1,298.94	1,247.55	1,247.44	4.45	4.25	178.75	-5,144.18	103.88	5,179.08	5,170.39	8.69 596.242	
1,400.00	1,398.70	1,345.78	1,345.63	4.82	4.60	178.76	-5,144.68	101.12	5,186.28	5,176.88	9.40 551.827	
1,500.00	1,498.46	1,442.42	1,442.23	5.19	4.95	178.77	-5,145.26	98.32	5,193.59	5,183.48	10.11 513.939	
1,600.00	1,598.21	1,556.83	1,556.59	5.56	5.36	178.78	-5,145.85	95.36	5,200.81	5,189.94	10.88 478.150	
1,700.00	1,697.97	1,687.09	1,686.85	5.93	5.82	178.78	-5,145.85	94.31	5,207.55	5,195.86	11.70 445.246	
1,800.00	1,797.72	1,851.31	1,851.02	6.30	6.37	178.72	-5,144.05	97.43	5,213.19	5,200.58	12.61 413.546	
1,900.00	1,897.48	1,943.14	1,942.78	6.67	6.67	178.67	-5,142.54	100.42	5,218.39	5,205.12	13.27 393.172	
2,000.00	1,997.24	2,026.05	2,025.64	7.04	6.95	178.62	-5,141.50	103.34	5,223.97	5,210.06	13.91 375.534	
2,100.00	2,096.99	2,120.49	2,120.01	7.41	7.27	178.56	-5,140.40	106.71	5,229.66	5,215.07	14.59 358.456	
2,200.00	2,196.75	2,200.00	2,199.49	7.78	7.54	178.52	-5,139.77	108.81	5,235.70	5,220.48	15.22 344.026	
2,300.00	2,296.51	2,281.94	2,281.42	8.15	7.81	178.49	-5,139.43	110.42	5,242.09	5,226.24	15.86 330.575	
2,400.00	2,396.26	2,392.98	2,392.43	8.52	8.19	178.44	-5,139.04	112.55	5,248.56	5,231.97	16.60 316.219	
2,500.00	2,496.02	2,488.03	2,487.46	8.89	8.52	178.40	-5,138.58	114.51	5,254.91	5,237.63	17.28 304.020	
2,600.00	2,595.77	2,583.07	2,582.47	9.26	8.85	178.36	-5,138.22	116.72	5,261.37	5,243.39	17.97 292.744	
2,700.00	2,695.53	2,680.12	2,679.50	9.63	9.18	178.32	-5,137.91	119.11	5,267.90	5,249.23	18.67 282.182	
2,800.00	2,795.29	2,776.23	2,775.58	10.01	9.51	178.27	-5,137.66	121.45	5,274.48	5,255.12	19.36 272.416	
2,900.00	2,895.04	2,867.50	2,866.83	10.38	9.83	178.23	-5,137.53	123.25	5,281.18	5,261.14	20.04 263.549	
3,000.00	2,994.80	2,965.23	2,964.55	10.75	10.17	178.20	-5,137.55	124.45	5,288.01	5,267.27	20.74 254.981	
3,100.00	3,094.56	3,074.70	3,074.01	11.12	10.55	178.17	-5,137.48	125.74	5,294.76	5,273.28	21.48 246.476	
3,200.00	3,194.31	3,182.33	3,181.64	11.49	10.92	178.14	-5,137.21	126.75	5,301.32	5,279.10	22.22 238.579	
3,300.00	3,294.07	3,283.75	3,283.06	11.87	11.28	178.12	-5,136.89	127.16	5,307.79	5,284.86	22.94 231.393	
3,400.00	3,393.82	3,412.09	3,411.40	12.24	11.73	178.10	-5,136.16	127.68	5,314.03	5,290.28	23.75 223.705	
3,500.00	3,493.58	3,538.03	3,537.33	12.61	12.18	178.07	-5,134.74	128.16	5,319.69	5,295.13	24.56 216.568	
3,600.00	3,593.34	3,639.38	3,638.66	12.98	12.54	178.05	-5,133.28	128.35	5,325.04	5,299.76	25.28 210.607	
3,700.00	3,693.09	3,720.44	3,719.72	13.36	12.82	178.03	-5,132.28	128.72	5,330.61	5,304.68	25.93 205.564	
3,800.00	3,792.85	3,800.00	3,799.27	13.73	13.10	178.01	-5,131.65	129.42	5,336.63	5,310.06	26.57 200.832	
3,900.00	3,892.61	3,851.45	3,850.72	14.10	13.28	177.98	-5,131.58	130.06	5,343.26	5,316.16	27.11 197.107	
4,000.00	3,992.36	3,900.00	3,899.26	14.47	13.45	177.96	-5,131.85	130.75	5,350.73	5,323.10	27.63 193.647	
4,100.00	4,092.12	3,967.05	3,966.30	14.85	13.68	177.93	-5,132.76	131.65	5,358.95	5,330.73	28.22 189.915	
4,200.00	4,191.87	4,027.91	4,027.14	15.22	13.89	177.91	-5,134.08	132.25	5,367.93	5,339.15	28.78 186.520	
4,300.00	4,291.63	4,100.00	4,099.20	15.59	14.14	177.88	-5,136.19	132.66	5,377.61	5,348.23	29.38 183.033	
4,400.00	4,391.39	4,240.28	4,239.43	15.96	14.62	177.88	-5,140.03	132.05	5,387.12	5,356.88	30.23 178.181	
4,500.00	4,491.14	4,357.70	4,356.81	16.34	15.03	177.88	-5,142.62	130.48	5,396.05	5,365.05	31.00 174.046	
4,600.00	4,590.90	4,459.46	4,458.53	16.71	15.38	177.88	-5,144.60	128.91	5,404.73	5,373.01	31.72 170.409	
4,700.00	4,690.66	4,570.03	4,569.07	17.08	15.76	177.87	-5,146.76	127.54	5,413.42	5,380.96	32.46 166.761	
4,800.00	4,790.41	4,675.72	4,674.74	17.45	16.12	177.87	-5,148.52	126.76	5,421.84	5,388.65	33.19 163.354	
4,818.08	4,808.45	4,693.69	4,692.71	17.52	16.19	177.86	-5,148.82	126.67	5,423.36	5,390.04	33.32 162.774	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Tyrell Fee - 001H - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 100-MWD													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
4,900.00	4,890.22	4,778.63	4,777.64	17.82	16.48	177.86	-5,150.19	126.31	5,429.37	5,395.46	33.91	160.117		
5,000.00	4,990.16	4,938.54	4,937.54	18.18	17.04	177.85	-5,151.67	125.83	5,433.65	5,398.82	34.83	155.983		
5,084.85	5,075.00	5,016.45	5,015.45	18.48	17.31	177.85	-5,152.07	126.09	5,435.02	5,399.61	35.41	153.502		
5,100.00	5,090.15	5,031.21	5,030.21	18.53	17.36	177.85	-5,152.16	126.16	5,435.11	5,399.60	35.51	153.050		
5,200.00	5,190.15	5,125.40	5,124.40	18.88	17.69	177.84	-5,152.73	126.55	5,435.74	5,399.54	36.19	150.184		
5,300.00	5,290.15	5,222.07	5,221.07	19.23	18.02	177.84	-5,153.51	126.89	5,436.55	5,399.66	36.88	147.392		
5,400.00	5,390.15	5,359.42	5,358.41	19.57	18.50	177.84	-5,153.98	126.77	5,436.86	5,399.13	37.73	144.117		
5,500.00	5,490.15	5,465.54	5,464.53	19.92	18.87	177.85	-5,153.99	126.27	5,436.85	5,398.40	38.45	141.395		
5,600.00	5,590.15	5,566.94	5,565.93	20.27	19.23	177.86	-5,153.96	125.54	5,436.80	5,397.64	39.16	138.833		
5,700.00	5,690.15	5,668.19	5,667.17	20.62	19.58	177.87	-5,153.93	124.43	5,436.72	5,396.85	39.87	136.361		
5,800.00	5,790.15	5,779.68	5,778.66	20.97	19.97	177.88	-5,153.78	123.36	5,436.56	5,395.94	40.62	133.849		
5,900.00	5,890.15	5,915.58	5,914.55	21.32	20.45	177.89	-5,152.99	122.47	5,435.96	5,394.51	41.45	131.139		
6,000.00	5,990.15	6,005.49	6,004.46	21.67	20.76	177.89	-5,152.28	122.07	5,435.15	5,393.03	42.12	129.036		
6,100.00	6,090.15	6,104.86	6,103.83	22.02	21.11	177.90	-5,151.54	121.58	5,434.38	5,391.56	42.82	126.898		
6,200.00	6,190.15	6,201.45	6,200.41	22.37	21.45	177.90	-5,150.84	121.28	5,433.65	5,390.13	43.52	124.858		
6,300.00	6,290.15	6,300.00	6,298.96	22.72	21.79	177.90	-5,150.14	121.19	5,432.94	5,388.72	44.22	122.863		
6,400.00	6,390.15	6,391.96	6,390.92	23.07	22.11	177.90	-5,149.56	121.16	5,432.31	5,387.41	44.90	120.995		
6,500.00	6,490.15	6,498.75	6,497.70	23.42	22.49	177.90	-5,148.95	121.19	5,431.74	5,386.11	45.63	119.044		
6,600.00	6,590.15	6,604.75	6,603.70	23.77	22.86	177.90	-5,148.19	121.28	5,431.03	5,384.67	46.36	117.158		
6,700.00	6,690.15	6,701.80	6,700.75	24.12	23.20	177.90	-5,147.48	121.36	5,430.30	5,383.25	47.05	115.408		
6,800.00	6,790.15	6,803.50	6,802.45	24.47	23.56	177.90	-5,146.74	121.46	5,429.58	5,381.81	47.77	113.669		
6,900.00	6,890.15	6,900.79	6,899.74	24.83	23.90	177.89	-5,146.05	121.57	5,428.87	5,380.40	48.46	112.018		
7,000.00	6,990.15	7,010.91	7,009.85	25.18	24.29	177.89	-5,145.16	121.70	5,428.06	5,378.86	49.21	110.307		
7,100.00	7,090.15	7,102.68	7,101.61	25.53	24.61	177.89	-5,144.43	121.83	5,427.27	5,377.39	49.89	108.791		
7,200.00	7,190.15	7,217.24	7,216.17	25.88	25.01	177.89	-5,143.39	122.19	5,426.37	5,375.72	50.65	107.139		
7,300.00	7,290.15	7,306.86	7,305.79	26.23	25.33	177.88	-5,142.58	122.56	5,425.49	5,374.17	51.32	105.721		
7,400.00	7,390.15	7,409.08	7,408.01	26.59	25.69	177.88	-5,141.71	123.09	5,424.65	5,372.62	52.03	104.250		
7,500.00	7,490.15	7,500.00	7,498.92	26.94	26.01	177.87	-5,141.05	123.55	5,423.94	5,371.23	52.71	102.901		
7,600.00	7,590.15	7,572.11	7,571.03	27.29	26.26	177.87	-5,140.78	123.85	5,423.57	5,370.25	53.32	101.726		
7,700.00	7,690.15	7,669.41	7,668.33	27.65	26.60	177.86	-5,140.70	124.46	5,423.50	5,369.49	54.01	100.413		
7,800.00	7,790.15	7,812.97	7,811.86	28.00	27.10	177.83	-5,139.88	127.09	5,423.01	5,368.13	54.88	98.823		
7,900.00	7,890.15	7,900.00	7,898.86	28.35	27.41	177.81	-5,139.12	129.30	5,422.23	5,366.69	55.54	97.634		
8,000.00	7,990.15	8,004.31	8,003.13	28.71	27.77	177.78	-5,138.30	131.96	5,421.54	5,365.28	56.26	96.367		
8,100.00	8,090.15	8,144.42	8,143.16	29.06	28.26	177.74	-5,136.57	136.01	5,420.42	5,363.31	57.11	94.910		
8,200.00	8,190.15	8,299.14	8,297.77	29.41	28.81	177.68	-5,133.33	141.36	5,418.48	5,360.47	58.01	93.401		
8,300.00	8,290.15	8,390.86	8,389.40	29.77	29.13	177.65	-5,130.98	144.42	5,416.06	5,357.37	58.69	92.276		
8,400.00	8,390.15	8,476.29	8,474.76	30.12	29.43	177.62	-5,128.97	147.21	5,413.85	5,354.49	59.35	91.215		
8,500.00	8,490.15	8,559.97	8,558.38	30.48	29.73	177.59	-5,127.25	149.92	5,411.92	5,351.91	60.01	90.191		
8,600.00	8,590.15	8,647.77	8,646.13	30.83	30.04	177.56	-5,125.71	152.24	5,410.28	5,349.61	60.67	89.173		
8,700.00	8,690.15	8,746.82	8,745.14	31.18	30.39	177.53	-5,124.11	154.83	5,408.78	5,347.40	61.38	88.121		
8,800.00	8,790.15	8,855.46	8,853.73	31.54	30.77	177.51	-5,122.26	157.26	5,407.17	5,345.05	62.12	87.044		
8,900.00	8,890.15	8,959.19	8,957.43	31.89	31.14	177.49	-5,120.37	159.21	5,405.43	5,342.59	62.84	86.013		
9,000.00	8,990.15	9,048.13	9,046.34	32.25	31.46	177.47	-5,118.78	160.83	5,403.73	5,340.22	63.52	85.076		
9,100.00	9,090.15	9,128.14	9,126.33	32.60	31.74	177.45	-5,117.62	162.18	5,402.36	5,338.20	64.16	84.207		
9,200.00	9,190.15	9,210.52	9,208.70	32.96	32.03	177.44	-5,116.77	163.14	5,401.38	5,336.57	64.80	83.351		
9,300.00	9,290.15	9,383.47	9,381.62	33.31	32.64	177.42	-5,114.23	165.47	5,400.06	5,334.29	65.77	82.099		
9,400.00	9,390.15	9,648.12	9,646.04	33.67	33.58	177.37	-5,104.57	168.97	5,396.71	5,329.66	67.04	80.498		
9,500.00	9,490.15	9,738.69	9,736.50	34.02	33.90	177.37	-5,099.87	168.96	5,391.53	5,323.81	67.72	79.613		
9,600.00	9,590.15	9,777.00	9,774.75	34.38	34.04	177.37	-5,097.95	168.66	5,386.81	5,318.58	68.23	78.952		
9,700.00	9,690.15	9,833.00	9,830.71	34.73	34.23	177.38	-5,095.70	168.08	5,382.98	5,314.19	68.79	78.252		
9,800.00	9,790.15	9,872.00	9,869.69	35.09	34.37	177.38	-5,094.75	167.66	5,380.46	5,311.17	69.29	77.653		
9,900.00	9,890.15	9,914.17	9,911.85	35.44	34.52	177.39	-5,094.19	167.35	5,379.04	5,309.25	69.79	77.073		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Tyrell Fee - 001H - Wellbore #1 - Surveys												Offset Site Error:	0.00 usft
Survey Program: 100-MWD												Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,000.00	9,990.15	9,968.00	9,965.68	35.80	34.71	177.39	-5,094.00	167.44	5,378.63	5,308.29	70.33	76.475	
10,003.23	9,993.38	9,968.00	9,965.68	35.81	34.71	177.39	-5,094.00	167.44	5,378.63	5,308.28	70.34	76.463	
10,100.00	10,090.15	10,033.25	10,030.94	36.15	34.93	177.38	-5,094.26	167.63	5,378.98	5,308.08	70.91	75.859	
10,200.00	10,190.15	10,121.25	10,118.93	36.51	35.23	177.39	-5,094.93	167.29	5,379.72	5,308.16	71.56	75.174	
10,300.00	10,290.15	10,215.82	10,213.49	36.86	35.56	177.39	-5,095.77	166.73	5,380.58	5,308.34	72.24	74.479	
10,400.00	10,390.15	10,311.00	10,308.66	37.22	35.88	177.40	-5,096.70	166.21	5,381.54	5,308.61	72.93	73.795	
10,500.00	10,490.15	10,349.00	10,346.67	37.57	36.01	177.40	-5,097.09	166.23	5,382.90	5,309.51	73.39	73.343	
10,600.00	10,590.15	10,365.32	10,362.98	37.93	36.07	177.40	-5,097.48	166.16	5,385.74	5,311.97	73.77	73.008	
10,700.00	10,690.15	10,380.00	10,377.64	38.29	36.12	177.40	-5,098.21	165.91	5,390.29	5,316.16	74.13	72.717	
10,800.00	10,790.15	10,380.00	10,377.64	38.64	36.12	177.40	-5,098.21	165.91	5,396.50	5,322.09	74.41	72.525	
10,900.00	10,890.15	10,395.06	10,392.65	39.00	36.17	177.41	-5,099.34	165.57	5,404.33	5,329.59	74.74	72.309	
11,000.00	10,990.15	10,412.00	10,409.50	39.35	36.23	177.41	-5,101.08	165.24	5,413.90	5,338.84	75.07	72.121	
11,100.00	11,090.15	10,412.00	10,409.50	39.71	36.23	177.41	-5,101.08	165.24	5,425.03	5,349.73	75.30	72.043	
11,200.00	11,190.15	10,412.00	10,409.50	40.07	36.23	177.41	-5,101.08	165.24	5,437.97	5,362.45	75.52	72.005	
11,300.00	11,290.15	10,428.56	10,425.91	40.42	36.28	177.42	-5,103.32	164.96	5,452.38	5,376.57	75.81	71.923	
11,400.00	11,390.15	10,444.00	10,441.11	40.78	36.33	177.42	-5,105.97	164.76	5,468.63	5,392.55	76.08	71.882	
11,400.89	11,391.04	10,444.00	10,441.11	40.78	36.33	177.42	-5,105.97	164.76	5,468.78	5,392.70	76.08	71.883	
11,450.00	11,440.09	10,444.00	10,441.11	40.94	36.33	177.41	-5,105.97	164.76	5,475.25	5,399.10	76.16	71.894	
11,500.00	11,489.66	10,444.00	10,441.11	41.09	36.33	177.40	-5,105.97	164.76	5,478.11	5,401.89	76.22	71.872	
11,550.00	11,538.47	10,444.00	10,441.11	41.24	36.33	177.37	-5,105.97	164.76	5,477.19	5,400.91	76.28	71.808	
11,600.00	11,586.17	10,444.00	10,441.11	41.37	36.33	177.33	-5,105.97	164.76	5,472.49	5,396.17	76.32	71.703	
11,650.00	11,632.38	10,444.00	10,441.11	41.50	36.33	177.28	-5,105.97	164.76	5,464.03	5,387.68	76.36	71.560	
11,700.00	11,676.75	10,444.00	10,441.11	41.61	36.33	177.22	-5,105.97	164.76	5,451.88	5,375.50	76.38	71.378	
11,750.00	11,718.95	10,459.44	10,456.21	41.72	36.39	177.16	-5,109.18	164.65	5,435.75	5,359.27	76.48	71.074	
11,800.00	11,758.65	10,476.00	10,472.25	41.81	36.44	177.08	-5,113.30	164.65	5,416.52	5,339.95	76.58	70.734	
11,850.00	11,795.55	10,476.00	10,472.25	41.90	36.44	176.99	-5,113.30	164.65	5,393.49	5,316.92	76.57	70.439	
11,900.00	11,829.38	10,476.00	10,472.25	41.99	36.44	176.89	-5,113.30	164.65	5,367.15	5,290.60	76.55	70.110	
11,950.00	11,859.87	10,476.00	10,472.25	42.08	36.44	176.78	-5,113.30	164.65	5,337.68	5,261.15	76.53	69.748	
12,000.00	11,886.79	10,476.00	10,472.25	42.18	36.44	176.66	-5,113.30	164.65	5,305.23	5,228.74	76.50	69.354	
12,050.00	11,909.94	10,476.00	10,472.25	42.28	36.44	176.54	-5,113.30	164.65	5,270.02	5,193.56	76.46	68.929	
12,100.00	11,929.14	10,476.00	10,472.25	42.38	36.44	176.40	-5,113.30	164.65	5,232.24	5,155.83	76.41	68.473	
12,150.00	11,944.24	10,476.00	10,472.25	42.49	36.44	176.26	-5,113.30	164.65	5,192.14	5,115.77	76.37	67.989	
12,200.00	11,955.14	10,491.92	10,487.57	42.60	36.49	176.12	-5,117.66	164.77	5,149.85	5,073.43	76.42	67.389	
12,250.00	11,961.74	10,508.00	10,502.97	42.71	36.54	175.97	-5,122.24	165.00	5,105.88	5,029.41	76.48	66.763	
12,300.00	11,964.00	10,508.00	10,502.97	42.82	36.54	175.81	-5,122.24	165.00	5,060.31	4,983.87	76.44	66.198	
12,300.89	11,964.00	10,508.00	10,502.97	42.82	36.54	175.81	-5,122.24	165.00	5,059.49	4,983.05	76.44	66.188	
12,400.00	11,964.00	10,508.00	10,502.97	43.07	36.54	175.51	-5,122.24	165.00	4,967.57	4,891.20	76.37	65.046	
12,500.00	11,964.00	10,508.00	10,502.97	43.38	36.54	175.24	-5,122.24	165.00	4,874.32	4,798.02	76.29	63.888	
12,600.00	11,964.00	10,508.00	10,502.97	43.75	36.54	175.00	-5,122.24	165.00	4,780.62	4,704.41	76.21	62.728	
12,700.00	11,964.00	10,508.00	10,502.97	44.17	36.54	174.80	-5,122.24	165.00	4,686.58	4,610.46	76.12	61.567	
12,800.00	11,964.00	10,522.28	10,516.60	44.64	36.59	174.63	-5,126.52	165.27	4,592.14	4,516.02	76.12	60.327	
12,883.71	11,964.00	10,525.88	10,520.02	45.07	36.60	174.52	-5,127.64	165.34	4,513.01	4,436.95	76.06	59.338	
12,900.00	11,964.00	10,540.00	10,533.38	45.15	36.64	174.50	-5,132.19	165.65	4,497.74	4,421.61	76.14	59.074	
13,000.00	11,964.00	10,540.00	10,533.38	45.72	36.64	174.38	-5,132.19	165.65	4,403.22	4,327.20	76.03	57.918	
13,100.00	11,964.00	10,540.00	10,533.38	46.34	36.64	174.25	-5,132.19	165.65	4,308.95	4,233.04	75.91	56.764	
13,200.00	11,964.00	10,540.00	10,533.38	47.01	36.64	174.12	-5,132.19	165.65	4,214.94	4,139.15	75.79	55.613	
13,300.00	11,964.00	10,540.00	10,533.38	47.73	36.64	173.98	-5,132.19	165.65	4,121.21	4,045.54	75.67	54.465	
13,400.00	11,964.00	10,540.00	10,533.38	48.49	36.64	173.83	-5,132.19	165.65	4,027.78	3,952.24	75.54	53.320	
13,500.00	11,964.00	10,555.73	10,548.15	49.30	36.69	173.68	-5,137.56	166.07	3,934.47	3,858.94	75.53	52.090	
13,600.00	11,964.00	10,571.00	10,562.39	50.14	36.74	173.51	-5,143.08	166.56	3,841.63	3,766.10	75.52	50.867	
13,700.00	11,964.00	10,571.00	10,562.39	51.03	36.74	173.34	-5,143.08	166.56	3,748.94	3,673.56	75.39	49.729	
13,800.00	11,964.00	10,571.00	10,562.39	51.95	36.74	173.16	-5,143.08	166.56	3,656.65	3,581.40	75.25	48.595	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional
Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Offset Design Tyrell Fee - 001H - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 100-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance								Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,900.00	11,964.00	10,571.00	10,562.39	52.91	36.74	172.96	-5,143.08	166.56	3,564.77	3,489.66	75.10	47.466		
14,000.00	11,964.00	10,589.58	10,579.56	53.91	36.79	172.76	-5,150.14	167.24	3,473.10	3,397.99	75.12	46.237		
14,100.00	11,964.00	10,603.00	10,591.87	54.93	36.83	172.55	-5,155.45	167.76	3,381.91	3,306.82	75.08	45.041		
14,200.00	11,964.00	10,603.00	10,591.87	55.99	36.83	172.31	-5,155.45	167.76	3,291.10	3,216.16	74.93	43.922		
14,300.00	11,964.00	10,603.00	10,591.87	57.07	36.83	172.06	-5,155.45	167.76	3,200.83	3,126.06	74.77	42.809		
14,400.00	11,964.00	10,634.00	10,619.97	58.18	36.93	171.81	-5,168.49	169.03	3,110.98	3,036.07	74.90	41.532		
14,500.00	11,964.00	10,634.00	10,619.97	59.32	36.93	171.53	-5,168.49	169.03	3,021.52	2,946.78	74.74	40.426		
14,600.00	11,964.00	10,634.00	10,619.97	60.48	36.93	171.22	-5,168.49	169.03	2,932.74	2,858.17	74.57	39.326		
14,700.00	11,964.00	10,634.00	10,619.97	61.66	36.93	170.89	-5,168.49	169.03	2,844.71	2,770.31	74.40	38.235		
14,800.00	11,964.00	10,650.70	10,634.82	62.86	36.99	170.55	-5,176.09	169.73	2,757.15	2,682.75	74.40	37.058		
14,900.00	11,964.00	10,666.00	10,648.18	64.09	37.03	170.18	-5,183.52	170.38	2,670.56	2,596.17	74.39	35.900		
15,000.00	11,964.00	10,666.00	10,648.18	65.33	37.03	169.76	-5,183.52	170.38	2,584.62	2,510.41	74.21	34.828		
15,100.00	11,964.00	10,666.00	10,648.18	66.59	37.03	169.30	-5,183.52	170.38	2,499.73	2,425.70	74.03	33.765		
15,200.00	11,964.00	10,680.75	10,660.81	67.87	37.08	168.83	-5,191.11	170.97	2,415.71	2,341.69	74.02	32.635		
15,300.00	11,964.00	10,699.00	10,676.06	69.16	37.14	168.32	-5,201.10	171.62	2,332.95	2,258.89	74.06	31.501		
15,400.00	11,964.00	10,699.00	10,676.06	70.47	37.14	167.73	-5,201.10	171.62	2,251.12	2,177.23	73.89	30.466		
15,500.00	11,964.00	10,751.75	10,719.41	71.79	37.31	167.29	-5,231.13	171.21	2,170.05	2,095.71	74.34	29.191		
15,600.00	11,964.00	10,763.00	10,728.52	73.13	37.34	166.65	-5,237.67	170.36	2,089.70	2,015.38	74.32	28.116		
15,700.00	11,964.00	10,795.00	10,753.65	74.47	37.44	166.15	-5,257.08	166.50	2,010.53	1,936.00	74.53	26.976		
15,800.00	11,964.00	10,795.00	10,753.65	75.83	37.44	165.28	-5,257.08	166.50	1,932.85	1,858.44	74.42	25.974		
15,900.00	11,964.00	10,810.27	10,765.07	77.21	37.49	164.49	-5,266.94	164.14	1,856.92	1,782.46	74.47	24.936		
16,000.00	11,964.00	10,826.00	10,776.35	78.59	37.54	163.62	-5,277.61	161.63	1,783.06	1,708.51	74.54	23.921		
16,100.00	11,964.00	10,826.00	10,776.35	79.98	37.54	162.36	-5,277.61	161.63	1,711.40	1,636.91	74.49	22.975		
16,200.00	11,964.00	10,858.00	10,797.84	81.38	37.64	161.50	-5,300.80	156.74	1,642.22	1,567.46	74.76	21.966		
16,300.00	11,964.00	10,858.00	10,797.84	82.80	37.64	159.87	-5,300.80	156.74	1,575.39	1,500.61	74.78	21.067		
16,400.00	11,964.00	10,875.20	10,808.57	84.22	37.69	158.33	-5,314.03	154.34	1,511.71	1,436.72	74.99	20.159		
16,500.00	11,964.00	10,889.00	10,816.73	85.65	37.73	156.44	-5,325.00	152.53	1,451.34	1,376.12	75.22	19.296		
16,600.00	11,964.00	10,906.22	10,826.31	87.08	37.78	154.29	-5,339.16	150.45	1,394.62	1,319.10	75.52	18.467		
16,700.00	11,964.00	10,921.00	10,833.97	88.53	37.83	151.61	-5,351.70	148.86	1,341.97	1,266.10	75.87	17.688		
16,740.74	11,964.00	10,921.00	10,833.97	89.12	37.83	150.11	-5,351.70	148.86	1,321.92	1,245.93	75.99	17.396		
16,741.61	11,964.00	10,921.00	10,833.97	89.14	37.83	150.08	-5,351.70	148.86	1,321.50	1,242.32	79.18	16.690 CC, ES, SF		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to WELL @ 3653.50usft (Patterson 282) Coordinates are relative to: Charles Ling Fed Com #134H
Offset Depths are relative to Offset Datum
Central Meridian is 104° 20' 0.000 W
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.43°

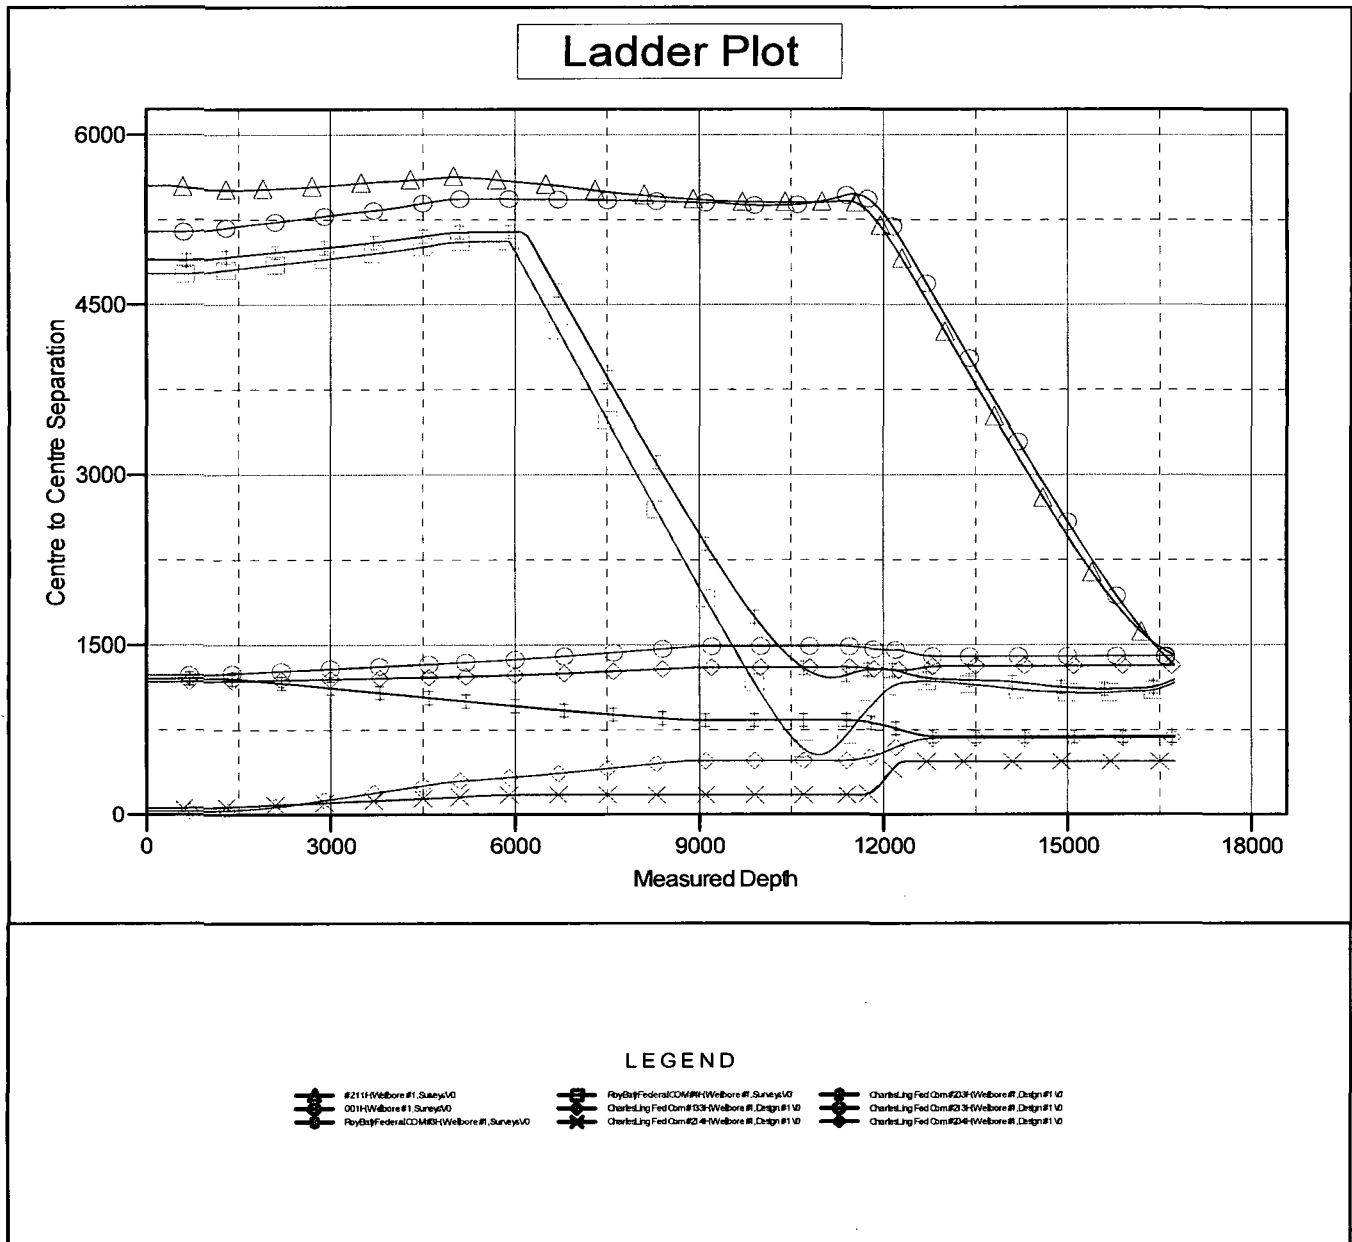

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



MS Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well Charles Ling Fed Com #134H
Project:	Lea County, New Mexico (NAD 27)	TVD Reference:	WELL @ 3653.50usft (Patterson 282)
Reference Site:	Charles Ling Fed Com	MD Reference:	WELL @ 3653.50usft (Patterson 282)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Charles Ling Fed Com #134H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Conroe DB
Reference Design:	Design #1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to WELL @ 3653.50usft (Patterson 282) Coordinates are relative to: Charles Ling Fed Com #134H


Offset Depths are relative to Offset Datum

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Central Meridian is 104° 20' 0.000 W

Grid Convergence at Surface is: 0.43°

Separation Factor Plot

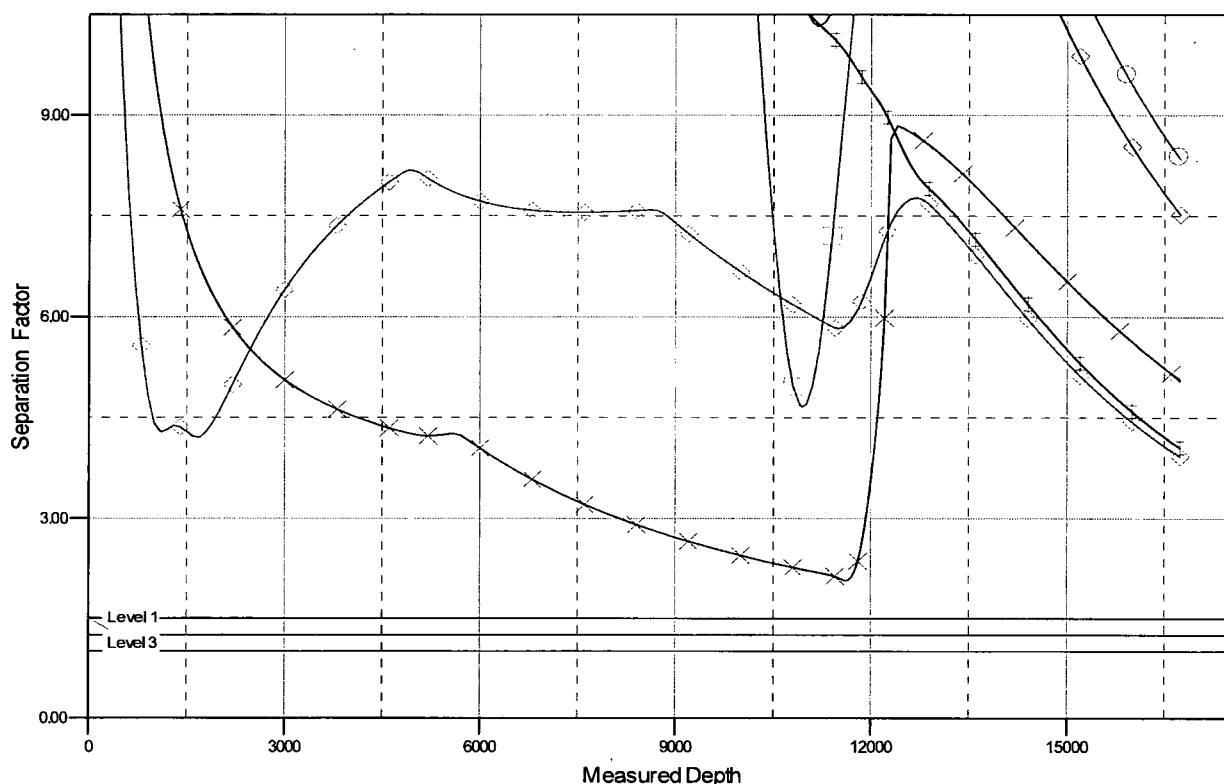

LEGEND

#2111-Wellbore #1, Survey V0	RyBdlFedralCOMB#-Wellbore #1, Survey V0	Charles Ling Fed Com #233-Wellbore #1, Design #1 V0
0011-Wellbore #1, Survey V0	Charles Ling Fed Com #133-Wellbore #1, Design #1 V0	Charles Ling Fed Com #233-Wellbore #1, Design #1 V0
RyBdlFedralCOMB#-Wellbore #1, Survey V0	Charles Ling Fed Com #234-Wellbore #1, Design #1 V0	Charles Ling Fed Com #234-Wellbore #1, Design #1 V0