

704' FSL  
895' FEL  
Section 2  
T-25-S, R-33-E

Durango 2 State #707H  
Lea County, New Mexico

KB: 3,454'  
GL: 3,429'

Proposed Wellbore  
Design A

API: 30-025-\*\*\*\*\*

Bit Size: 12-1/4"


9-5/8", 40#, J-55, LTC      0' - 1,215'

Bit Size: 8-3/4"

7-5/8", 29.7#, HCP-110 , FXL @ 0' -  
11,470'

Bit Size: 6-3/4"

5-1/2", 17#, HCP-110, LTC @ 0' - 17,455'

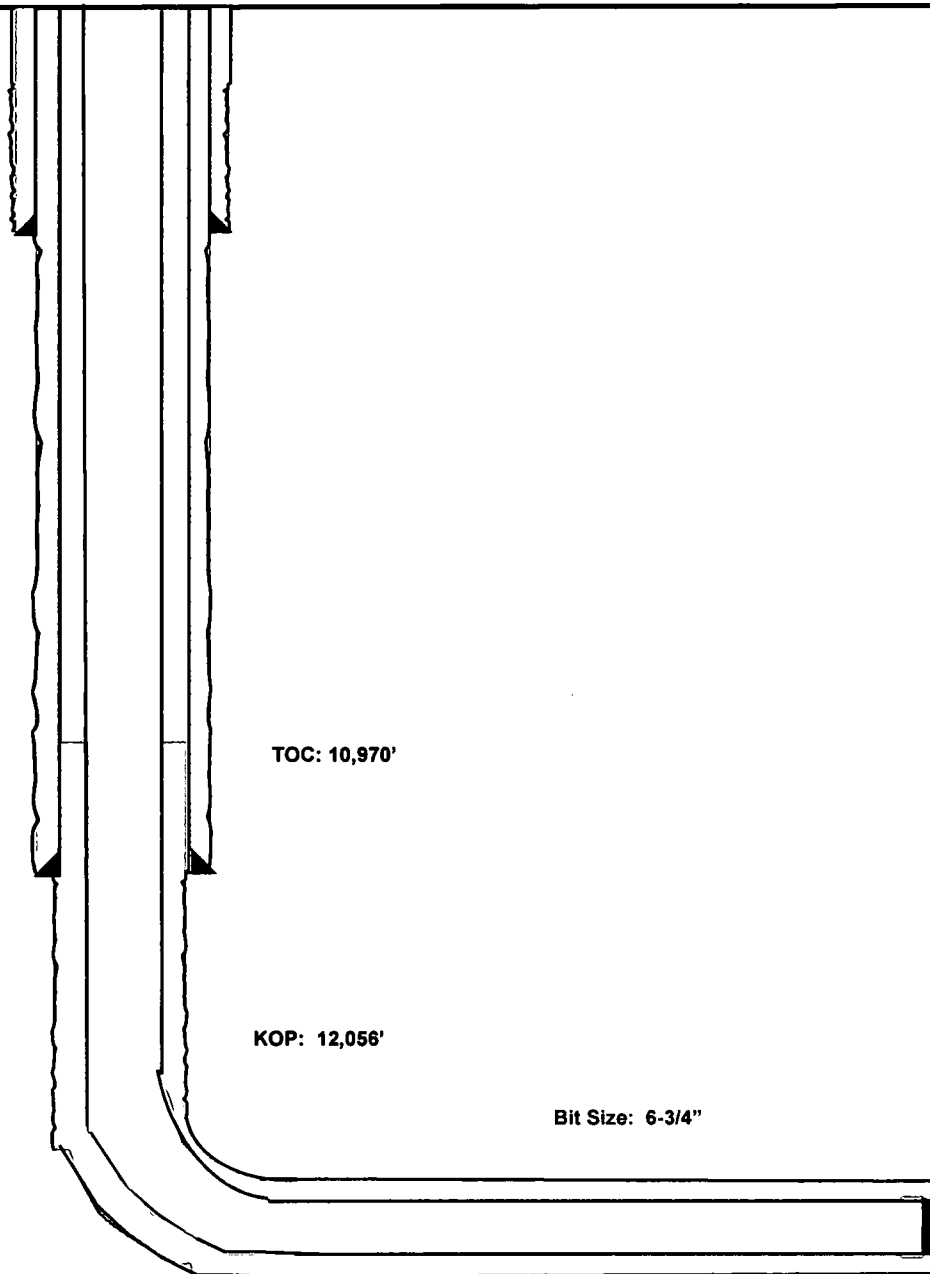

Lateral: 17,455' MD, 12,498' TVD  
BH Location: 100' FNL & 990' FEL  
Section 2  
T-25-S, R-33-E


704' FSL  
895' FEL  
Section 2  
T-25-S, R-33-E

EOG RESOURCES, INC.  
DURANGO 2 STATE #707H

KB: 3,454'  
GL: 3,429'

Proposed Wellbore  
Design B

API: 30-025-\*\*\*\*\*

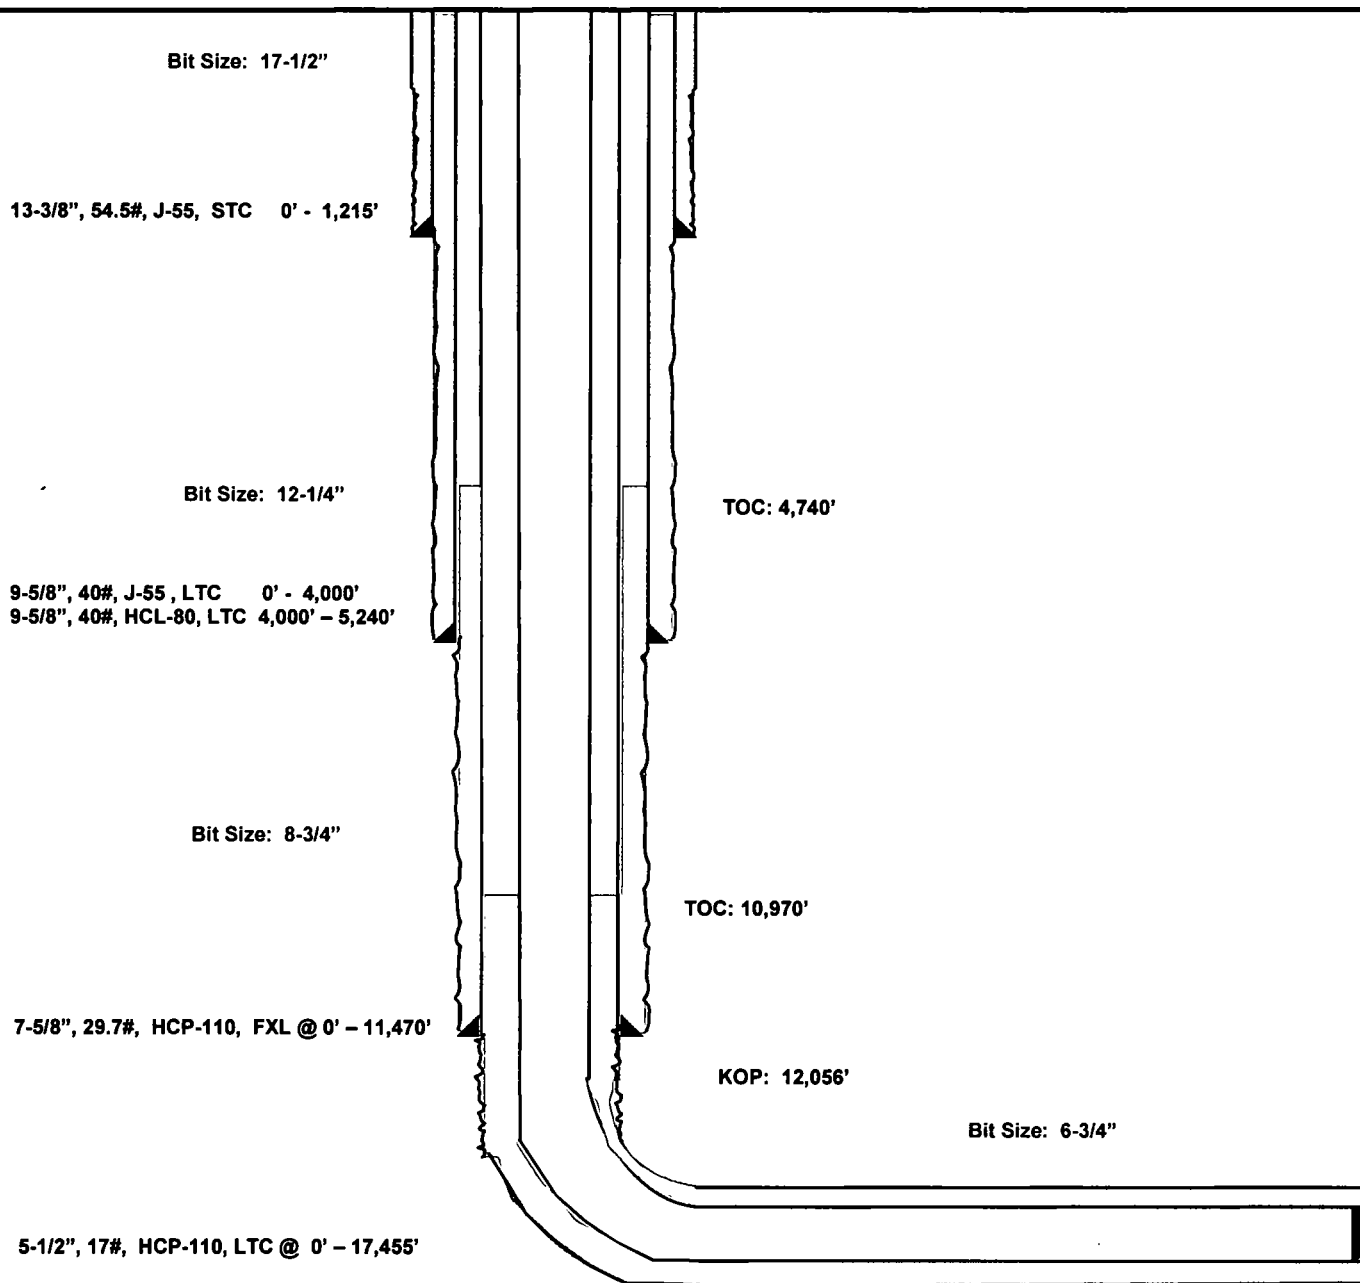

Lateral: 17,455' MD, 12,498' TVD  
BH Location: 100' FNL & 990' FEL  
Section 2  
T-25-S, R-33-E

**EOG RESOURCES, INC.  
DURANGO 2 STATE #707H**

**Permit Information:**

Well Name: Durango 2 State #707H

**Location:**

SHL: 704' FSL & 895' FEL, Section 2, T-25-S, R-33-E, Lea Co., N.M.

BHL: 100' FNL & 990' FEL, Section 2, T-25-S, R-33-E, Lea Co., N.M.

**Design A**

**Casing Program:**

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF <sub>min</sub> Collapse	DF <sub>min</sub> Burst	DF <sub>min</sub> Tension
12.25"	0 - 1,215'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
8.75"	0' - 11,470'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.60
6.75"	0' - 17,455'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

**Cement Program:**

Depth	No. Sacks	Wt. ppg	Yld Ft <sup>3</sup> /sk	Slurry Description
1,215'	400	13.5	1.73	Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	300	14.8	1.34	Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate
11,470'	600	14.2	1.11	1 <sup>st</sup> Stage (Tail): Class C + 5% Salt + (TOC @ 7,800')
	1,000	12.7	2.30	2 <sup>nd</sup> Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
17,455'	800	14.2	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,970')

**Mud Program:**

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 1,215'	Fresh - Gel	8.6-8.8	28-34	N/c
1,215' - 11,470'	Brine	8.8-10.0	28-34	N/c
11,470' - 12,056'	Oil Base	10.0-11.5	58-68	3 - 6
12,056' - 17,455' Lateral	Oil Base	10.0-11.5	58-68	3 - 6

**EOG RESOURCES, INC.  
DURANGO 2 STATE #707H**

**Design B**

**Casing Program:**

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF <sub>min</sub> Collapse	DF <sub>min</sub> Burst	DF <sub>min</sub> Tension
17.5"	0 – 1,215'	13.375"	54.5#	J-55	STC	1.125	1.25	1.60
12.25"	0-4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
12.25"	4,000' – 5,240'	9.625"	40#	HCL-80	LTC	1.125	1.25	1.60
8.75"	0 – 11,470'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.60
6.75"	0'-17,455'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

**Cement Program:**

Depth	No. Sacks	Wt. lb/gal	Yld Ft <sup>3</sup> /sk	Slurry Description
1,215'	697	13.5	1.74	Lead: Class 'C' + 4.00% Bentonite + 2.00% CaCl <sub>2</sub> (TOC @ Surface)
	333	14.8	1.35	Tail: Class 'C' + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate + 2.0% KCl (1.06 lb/sk)
5,240'	692	12.7	2.22	Lead: Class C + 0.15% C-20 + 11.63 pps Salt + 0.1% C-51 + 0.75% C-41P (TOC @ Surface)
	303	14.8	1.32	Tail: Class C + 0.13% C-20
11,470'	375	10.8	3.67	Lead: Class C + 0.40% D013 + 0.20% D046 + 0.10% D065 + 0.20% D167 (TOC @ 4,740')
	400	14.8	2.38	Tail: Class H + 94.0 pps D909 + 0.25% D065 + 0.30% D167 + 0.02% D208 + 0.15% D800
17,455'	950	14.8	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,970')

As a contingency, EOG requests to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,785') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,000 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed.

**Mud Program:**

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,215'	Fresh - Gel	8.6-8.8	28-34	N/c
1,215' – 5,240'	Brine	10.0-10.2	28-34	N/c
5,240' – 11,470'	Oil Base	8.7-9.4	58-68	N/c - 6
11,470' – 17,455' Lateral	Oil Base	10.0-11.5	58-68	3 - 6

**EOG RESOURCES, INC.  
DURANGO 2 STATE #707H**

**Hydrogen Sulfide Plan Summary**

- A. All personnel shall receive proper H<sub>2</sub>S training in accordance with Onshore Order III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:
- Well control equipment
    - a. Flare line 150' from wellhead to be ignited by flare gun.
    - b. Choke manifold with a remotely operated choke.
    - c. Mud/gas separator
  - Protective equipment for essential personnel.
    - Breathing apparatus:
      - a. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
      - b. Work/Escapes packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
      - c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.
    - Auxiliary Rescue Equipment:
      - a. Stretcher
      - b. Two OSHA full body harness
      - c. 100 ft 5/8 inch OSHA approved rope
      - d. 1-20# class ABC fire extinguisher
  - H<sub>2</sub>S detection and monitoring equipment:
    - The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.
    - (Gas sample tubes will be stored in the safety trailer)
  - Visual warning systems.
    - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
    - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
    - c. Two wind socks will be placed in strategic locations, visible from all angles.

**EOG RESOURCES, INC.**  
**DURANGO 2 STATE #707H**

- **Mud program:**  
The mud program has been designed to minimize the volume of H<sub>2</sub>S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H<sub>2</sub>S bearing zones.
- **Metallurgy:**  
All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H<sub>2</sub>S service.
- **Communication:**  
Communication will be via cell phones and land lines where available.

**EOG RESOURCES, INC.  
DURANGO 2 STATE #707H**

**Emergency Assistance Telephone List**

**PUBLIC SAFETY:** **911 or**

Lea County Sheriff's Department (575) 396-3611

Rod Coffman

**Fire Department:**

Carlsbad (575) 885-3125

Artesia (575) 746-5050

**Hospitals:**

Carlsbad (575) 887-4121

Artesia (575) 748-3333

Hobbs (575) 392-1979

Dept. of Public Safety/Carlsbad (575) 748-9718

Highway Department (575) 885-3281

New Mexico Oil Conservation (575) 476-3440

U.S. Dept. of Labor (575) 887-1174

**EOG Resources, Inc.**

EOG / Midland Office (432) 686-3600

**Company Drilling Consultants:**

David Dominique Cell (985) 518-5839

Mike Vann Cell (817) 980-5507

**Drilling Engineer**

Steve Munsell Office (432) 686-3609

Cell (432) 894-1256

**Drilling Manager**

Aj Dach Office (432) 686-3751

Cell (817) 480-1167

**Drilling Superintendent**

Domingo Lopez Office (432) 686-3702

Cell (432) 215-9452

**H&P Drilling**

H&P Drilling Office (432) 563-5757

H&P 651 Drilling Rig Rig (903) 509-7131

**Tool Pusher:**

Johnathan Craig Cell (817) 760-6374

Brad Garrett

**Safety**

Brian Chandler (HSE Manager) Office (432) 686-3695

Cell (817) 239-0251