

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
Operator Copy

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other		5. Lease Serial No. NMMN132949
2. Name of Operator COG OPERATING LLC Contact: MAYTE X REYES E-Mail: mreyes1@concho.com		6. If Indian, Allottee or Tribe Name
3a. Address ONE CONCHO CENTER 600 W ILLINOIS AVENUE MIDLAND, TX 79701-4287	3b. Phone No. (include area code) Ph: 575-748-6945	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 31 T24S R35E 270FSL 390FWL 32.167465 N Lat, 103.413834 W Lon		8. Well Name and No. STOVE PIPE FEDERAL COM 603H
		9. API Well No. 30-025-46500-00-X1
		10. Field and Pool or Exploratory Area MESA VERDE
		11. County or Parish, State LEA COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☒ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	Change to Original A
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	PD

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

COG Operating respectfully requests approval for the following changes to the originally approved APD.

Dedicated acres.

BHL Change
From: 50' FSL & 330' FWL Section 7. T25S. R35E.
To: 50' FSL & 1310' FWL Section 7. T25S. R35E.

C102 attached.
AC report attached.
Directional plan attached.

HOBBS OCD

MAR 16 2020

RECEIVED

All previous Conditions of Approval still apply. DR

14. I hereby certify that the foregoing is true and correct. Electronic Submission #496043 verified by the BLM Well Information System For COG OPERATING LLC, sent to the Hobbs Committed to AFMSS for processing by PRISCILLA PEREZ on 12/17/2019 (20PP0675SE)	
Name (Printed/Typed) MAYTE X REYES	Title SENIOR REGULATORY ANALYST
Signature (Electronic Submission)	Date 12/16/2019

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>DYLAN ROSSMANGO</u>	Title <u>PETROLEUM ENGINEER</u>	Date <u>12/18/2019</u>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office Hobbs

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

Lab









Cancho Resources, Inc.
 Project: Lee County, NM (NAD)
 Site: (Stove Pipe Federal) Sec-31 T24-S R35-E
 Well: Stove Pipe Federal Com 6003H
 Wellbore: OWB
 Design: Plan #2
 Lat: 32° 10' 2.430 N
 Long: 103° 24' 48.113 W
 Pad GL: 3347.4
 KB: KB @ 3378.4usft (Precision 108)

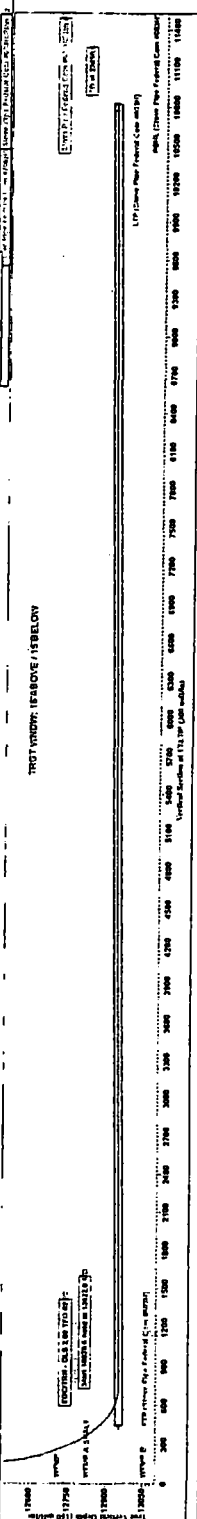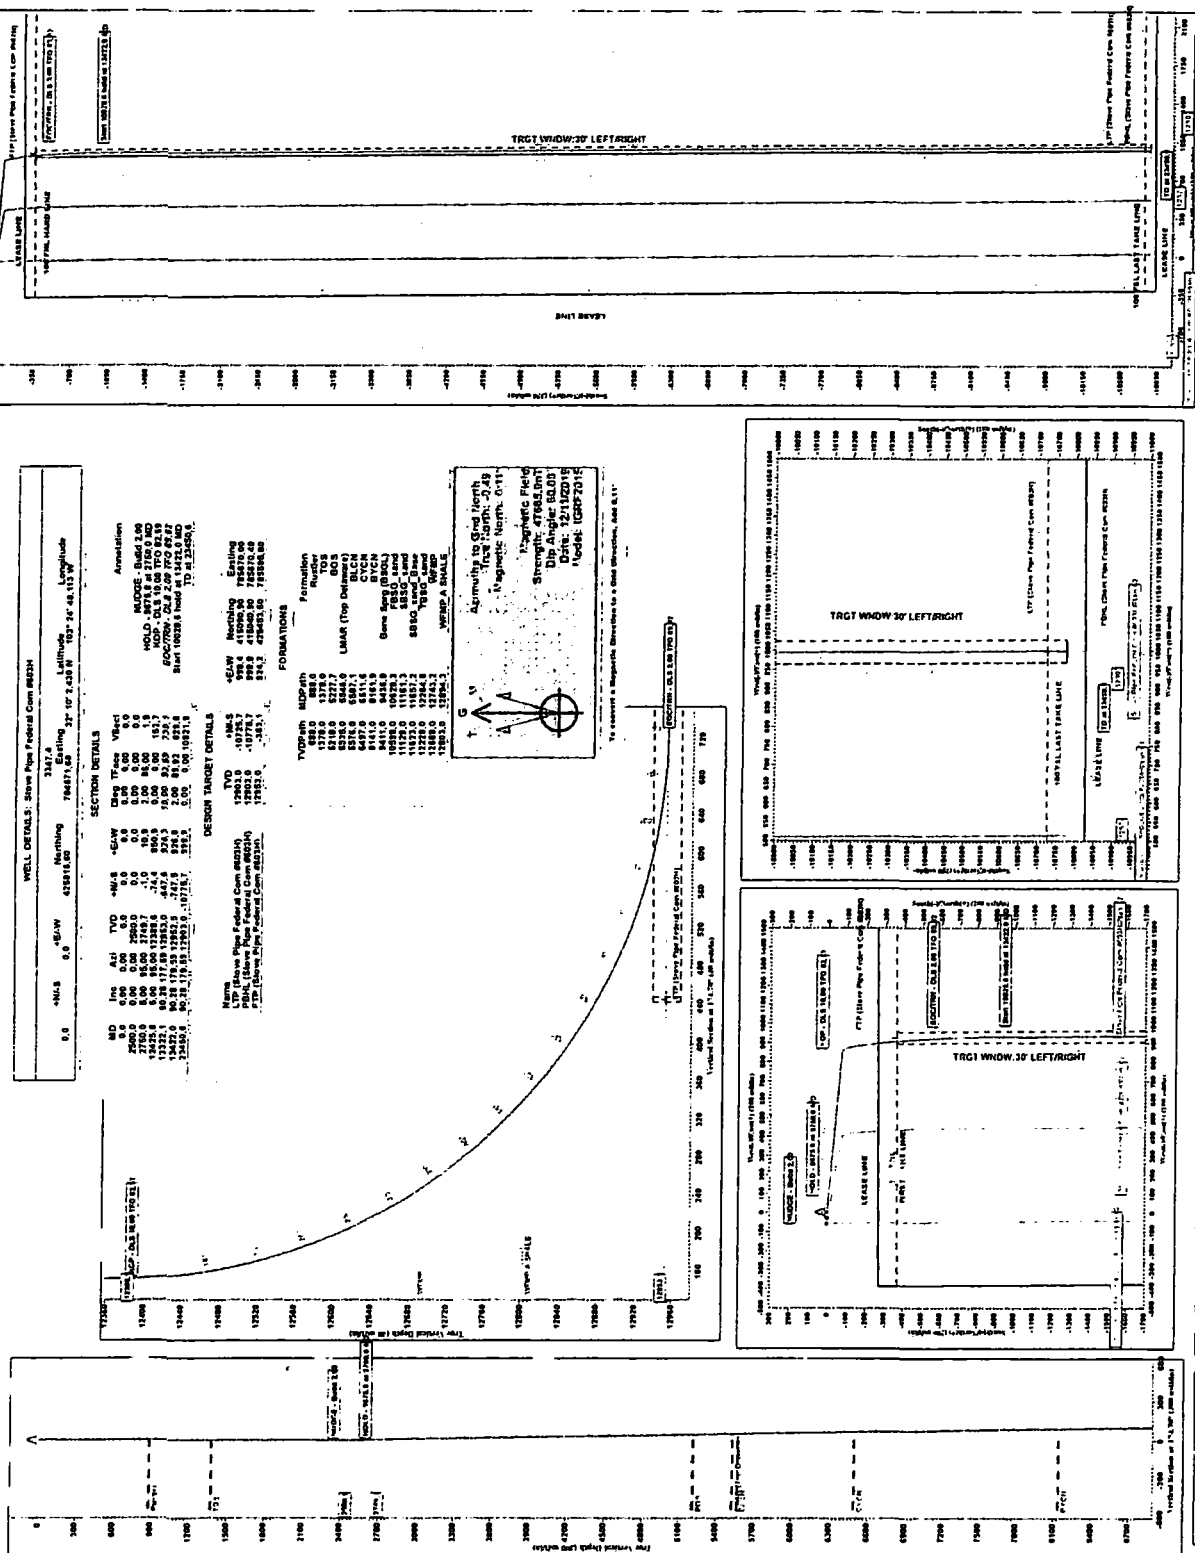



Concho Resources, Inc.
Project: Lea County, NM (NAD 27 HME)
Site: (Stove Pipe Federal) Sec.31, T.24-S. R.35-E
Well: Stove Pipe Federal Com #803H
Wellbore: OWB
Design: Plan #2
Lat: 32° 10' 2.430 N
Long: 103° 24' 48.113 W
Pad GL: 3347.4
KB: KB @ 3378.4usft (Precision 106)

INTREPID

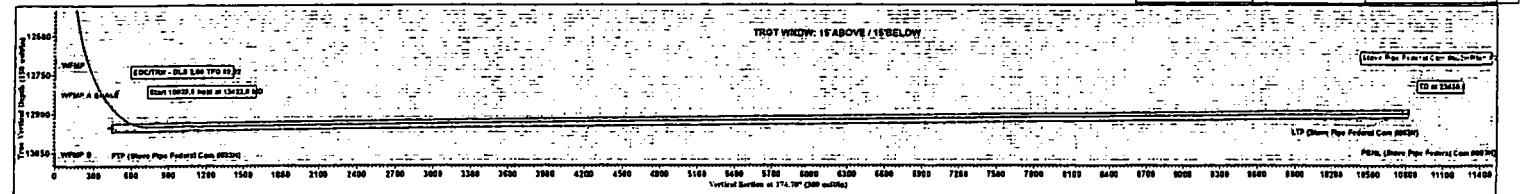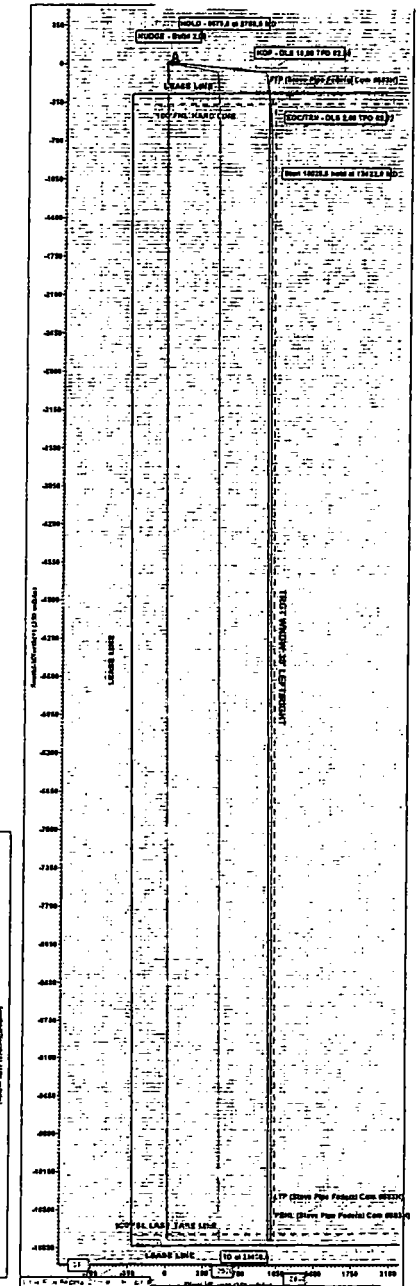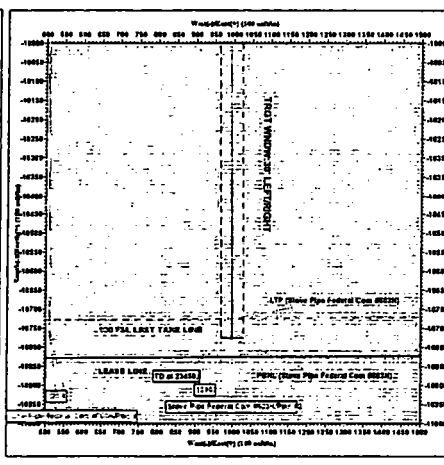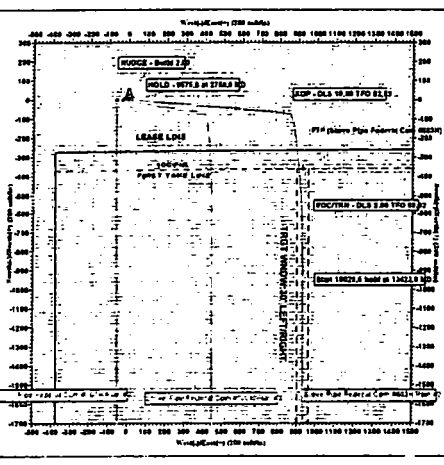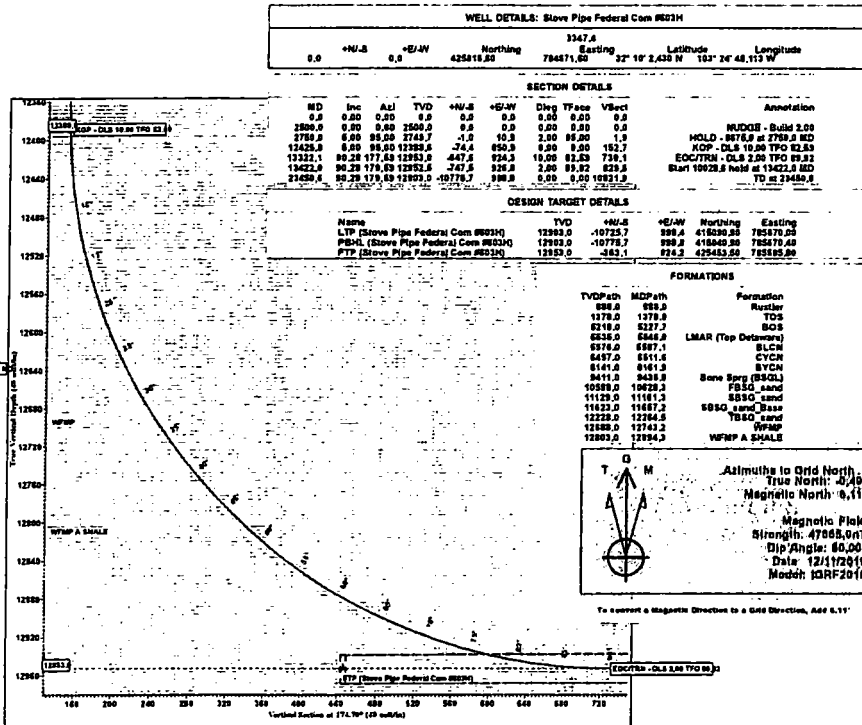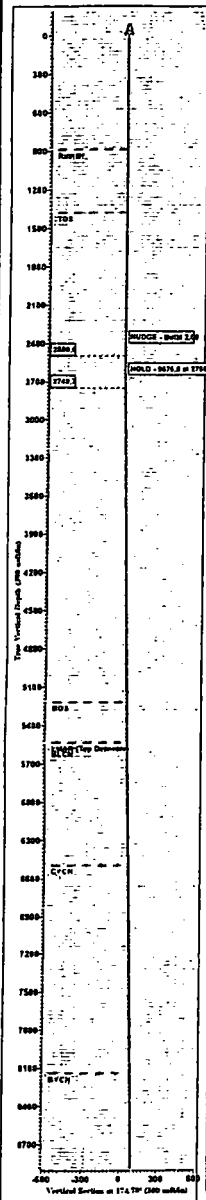



CONCHO

Concho Resources, Inc.

Lea County, NM (NAD 27 NME)

(Stove Pipe Federal) Sec-31_T-24-S_R-35-E

Stove Pipe Federal Com #603H

OWB

Plan: Plan #2

Standard Planning Report

12 December, 2019

INTREPID



Intrepid Planning Report



Database: EDM 5000.15 Single User Db
Company: Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Stove Pipe Federal) Sec-31_T-24-S_R-35-E
Well: Stove Pipe Federal Com #603H
Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: Well Stove Pipe Federal Com #603H
TVD Reference: KB @ 3378.4usft (Precision 106)
MD Reference: KB @ 3378.4usft (Precision 106)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Project	Lea County, NM (NAD 27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site (Stove Pipe Federal) Sec-31_T-24-S_R-35-E

Site Position:	Map	Northing:	425,816.60 usft	Latitude:	32° 10' 2.430 N
From:		Easting:	784,671.60 usft	Longitude:	103° 24' 48.113 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.49 °

Well Stove Pipe Federal Com #603H

Well Position	+N/-S	0.0 usft	Northing:	425,816.60 usft	Latitude:	32° 10' 2.430 N
	+E/-W	0.0 usft	Easting:	784,671.60 usft	Longitude:	103° 24' 48.113 W
Position Uncertainty	0.0 usft	Wellhead Elevation:		Ground Level:	3,347.4 usft	

Wellbore OWB

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	12/11/19	6.60	60.00	47,665.94056353

Design Plan #2

Audit Notes:


Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	174.70

Plan Survey Tool Program Date 12/12/19

Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	23,450.6 Plan #2 (OWB)	MWD+IFR1+FDIR	
			OWSG MWD + IFR1 + FDI	

Plan Sections

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,750.0	5.00	95.00	2,749.7	-1.0	10.9	2.00	2.00	0.00	95.00	
12,425.7	5.00	95.00	12,388.6	-74.4	850.9	0.00	0.00	0.00	0.00	
13,322.1	90.28	177.59	12,953.0	-647.6	924.3	10.00	9.51	9.21	82.59	
13,422.0	90.28	179.59	12,952.5	-747.5	926.8	2.00	0.00	2.00	89.92	
23,450.6	90.28	179.59	12,903.0	-10,775.7	998.8	0.00	0.00	0.00	0.00	PBHL (Stove Pipe f



Intrepid
Planning Report



Database: EDM 5000.15 Single User Db
Company: Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Stove Pipe Federal) Sec-31_T-24-S_R-35-E
Well: Stove Pipe Federal Com #603H
Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: Well Stove Pipe Federal Com #603H
TVD Reference: KB @ 3378.4usft (Precision 106)
MD Reference: KB @ 3378.4usft (Precision 106)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
888.0	0.00	0.00	888.0	0.0	0.0	0.0	0.00	0.00	0.00
Rustler									
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,378.0	0.00	0.00	1,378.0	0.0	0.0	0.0	0.00	0.00	0.00
TOS									
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
NUDGE - Build 2.00									
2,600.0	2.00	95.00	2,600.0	-0.2	1.7	0.3	2.00	2.00	0.00
2,700.0	4.00	95.00	2,699.8	-0.6	7.0	1.2	2.00	2.00	0.00
2,750.0	5.00	95.00	2,749.7	-1.0	10.9	1.9	2.00	2.00	0.00
HOLD - 9675.8 at 2750.0 MD									
2,800.0	5.00	95.00	2,799.5	-1.3	15.2	2.7	0.00	0.00	0.00
2,900.0	5.00	95.00	2,899.1	-2.1	23.9	4.3	0.00	0.00	0.00
3,000.0	5.00	95.00	2,998.7	-2.8	32.6	5.8	0.00	0.00	0.00
3,100.0	5.00	95.00	3,098.4	-3.6	41.2	7.4	0.00	0.00	0.00
3,200.0	5.00	95.00	3,198.0	-4.4	49.9	9.0	0.00	0.00	0.00
3,300.0	5.00	95.00	3,297.6	-5.1	58.6	10.5	0.00	0.00	0.00
3,400.0	5.00	95.00	3,397.2	-5.9	67.3	12.1	0.00	0.00	0.00
3,500.0	5.00	95.00	3,496.8	-6.6	76.0	13.6	0.00	0.00	0.00
3,600.0	5.00	95.00	3,596.4	-7.4	84.7	15.2	0.00	0.00	0.00
3,700.0	5.00	95.00	3,696.1	-8.2	93.3	16.7	0.00	0.00	0.00
3,800.0	5.00	95.00	3,795.7	-8.9	102.0	18.3	0.00	0.00	0.00
3,900.0	5.00	95.00	3,895.3	-9.7	110.7	19.9	0.00	0.00	0.00
4,000.0	5.00	95.00	3,994.9	-10.4	119.4	21.4	0.00	0.00	0.00
4,100.0	5.00	95.00	4,094.5	-11.2	128.1	23.0	0.00	0.00	0.00
4,200.0	5.00	95.00	4,194.2	-12.0	136.8	24.5	0.00	0.00	0.00
4,300.0	5.00	95.00	4,293.8	-12.7	145.4	26.1	0.00	0.00	0.00
4,400.0	5.00	95.00	4,393.4	-13.5	154.1	27.7	0.00	0.00	0.00
4,500.0	5.00	95.00	4,493.0	-14.2	162.8	29.2	0.00	0.00	0.00
4,600.0	5.00	95.00	4,592.6	-15.0	171.5	30.8	0.00	0.00	0.00



Intrepid Planning Report




Database: EDM 5000.15 Single User Db
Company: Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Stove Pipe Federal) Sec-31_T-24-S_R-35-E
Well: Stove Pipe Federal Com #603H
Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: Well Stove Pipe Federal Com #603H
TVD Reference: KB @ 3378.4usft (Precision 106)
MD Reference: KB @ 3378.4usft (Precision 106)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,700.0	5.00	95.00	4,692.3	-15.8	180.2	32.3	0.00	0.00	0.00
4,800.0	5.00	95.00	4,791.9	-16.5	188.8	33.9	0.00	0.00	0.00
4,900.0	5.00	95.00	4,891.5	-17.3	197.5	35.4	0.00	0.00	0.00
5,000.0	5.00	95.00	4,991.1	-18.0	206.2	37.0	0.00	0.00	0.00
5,100.0	5.00	95.00	5,090.7	-18.8	214.9	38.6	0.00	0.00	0.00
5,200.0	5.00	95.00	5,190.4	-19.6	223.6	40.1	0.00	0.00	0.00
5,227.7	5.00	95.00	5,218.0	-19.8	226.0	40.5	0.00	0.00	0.00
BOS									
5,300.0	5.00	95.00	5,290.0	-20.3	232.3	41.7	0.00	0.00	0.00
5,400.0	5.00	95.00	5,389.6	-21.1	240.9	43.2	0.00	0.00	0.00
5,500.0	5.00	95.00	5,489.2	-21.8	249.6	44.8	0.00	0.00	0.00
5,546.0	5.00	95.00	5,535.0	-22.2	253.6	45.5	0.00	0.00	0.00
LMAR (Top Delaware)									
5,587.1	5.00	95.00	5,576.0	-22.5	257.2	46.1	0.00	0.00	0.00
BLCN									
5,600.0	5.00	95.00	5,588.8	-22.6	258.3	46.3	0.00	0.00	0.00
5,700.0	5.00	95.00	5,688.5	-23.4	267.0	47.9	0.00	0.00	0.00
5,800.0	5.00	95.00	5,788.1	-24.1	275.7	49.5	0.00	0.00	0.00
5,900.0	5.00	95.00	5,887.7	-24.9	284.4	51.0	0.00	0.00	0.00
6,000.0	5.00	95.00	5,987.3	-25.6	293.0	52.6	0.00	0.00	0.00
6,100.0	5.00	95.00	6,086.9	-26.4	301.7	54.1	0.00	0.00	0.00
6,200.0	5.00	95.00	6,186.6	-27.2	310.4	55.7	0.00	0.00	0.00
6,300.0	5.00	95.00	6,286.2	-27.9	319.1	57.2	0.00	0.00	0.00
6,400.0	5.00	95.00	6,385.8	-28.7	327.8	58.8	0.00	0.00	0.00
6,500.0	5.00	95.00	6,485.4	-29.4	336.5	60.4	0.00	0.00	0.00
6,511.6	5.00	95.00	6,497.0	-29.5	337.5	60.5	0.00	0.00	0.00
CYCN									
6,600.0	5.00	95.00	6,585.0	-30.2	345.1	61.9	0.00	0.00	0.00
6,700.0	5.00	95.00	6,684.7	-31.0	353.8	63.5	0.00	0.00	0.00
6,800.0	5.00	95.00	6,784.3	-31.7	362.5	65.0	0.00	0.00	0.00
6,900.0	5.00	95.00	6,883.9	-32.5	371.2	66.6	0.00	0.00	0.00
7,000.0	5.00	95.00	6,983.5	-33.2	379.9	68.2	0.00	0.00	0.00
7,100.0	5.00	95.00	7,083.1	-34.0	388.5	69.7	0.00	0.00	0.00
7,200.0	5.00	95.00	7,182.7	-34.8	397.2	71.3	0.00	0.00	0.00
7,300.0	5.00	95.00	7,282.4	-35.5	405.9	72.8	0.00	0.00	0.00
7,400.0	5.00	95.00	7,382.0	-36.3	414.6	74.4	0.00	0.00	0.00
7,500.0	5.00	95.00	7,481.6	-37.0	423.3	75.9	0.00	0.00	0.00
7,600.0	5.00	95.00	7,581.2	-37.8	432.0	77.5	0.00	0.00	0.00
7,700.0	5.00	95.00	7,680.8	-38.6	440.6	79.1	0.00	0.00	0.00
7,800.0	5.00	95.00	7,780.5	-39.3	449.3	80.6	0.00	0.00	0.00
7,900.0	5.00	95.00	7,880.1	-40.1	458.0	82.2	0.00	0.00	0.00
8,000.0	5.00	95.00	7,979.7	-40.8	466.7	83.7	0.00	0.00	0.00
8,100.0	5.00	95.00	8,079.3	-41.6	475.4	85.3	0.00	0.00	0.00
8,161.9	5.00	95.00	8,141.0	-42.1	480.7	86.3	0.00	0.00	0.00
BYCN									
8,200.0	5.00	95.00	8,178.9	-42.3	484.1	86.8	0.00	0.00	0.00
8,300.0	5.00	95.00	8,278.6	-43.1	492.7	88.4	0.00	0.00	0.00
8,400.0	5.00	95.00	8,378.2	-43.9	501.4	90.0	0.00	0.00	0.00
8,500.0	5.00	95.00	8,477.8	-44.6	510.1	91.5	0.00	0.00	0.00
8,600.0	5.00	95.00	8,577.4	-45.4	518.8	93.1	0.00	0.00	0.00
8,700.0	5.00	95.00	8,677.0	-46.1	527.5	94.6	0.00	0.00	0.00
8,800.0	5.00	95.00	8,776.7	-46.9	536.1	96.2	0.00	0.00	0.00
8,900.0	5.00	95.00	8,876.3	-47.7	544.8	97.7	0.00	0.00	0.00



Intrepid Planning Report



Database: EDM 5000.15 Single User Db
Company: Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Stove Pipe Federal) Sec-31_T-24-S_R-35-E
Well: Stove Pipe Federal Com #603H
Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: Well Stove Pipe Federal Com #603H
TVD Reference: KB @ 3378.4usft (Precision 106)
MD Reference: KB @ 3378.4usft (Precision 106)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,000.0	5.00	95.00	8,975.9	-48.4	553.5	99.3	0.00	0.00	0.00
9,100.0	5.00	95.00	9,075.5	-49.2	562.2	100.9	0.00	0.00	0.00
9,200.0	5.00	95.00	9,175.1	-49.9	570.9	102.4	0.00	0.00	0.00
9,300.0	5.00	95.00	9,274.8	-50.7	579.6	104.0	0.00	0.00	0.00
9,400.0	5.00	95.00	9,374.4	-51.5	588.2	105.5	0.00	0.00	0.00
9,436.8	5.00	95.00	9,411.0	-51.7	591.4	106.1	0.00	0.00	0.00
Bone Sprg (BSGL)									
9,500.0	5.00	95.00	9,474.0	-52.2	596.9	107.1	0.00	0.00	0.00
9,600.0	5.00	95.00	9,573.6	-53.0	605.6	108.7	0.00	0.00	0.00
9,700.0	5.00	95.00	9,673.2	-53.7	614.3	110.2	0.00	0.00	0.00
9,800.0	5.00	95.00	9,772.9	-54.5	623.0	111.8	0.00	0.00	0.00
9,900.0	5.00	95.00	9,872.5	-55.3	631.7	113.3	0.00	0.00	0.00
10,000.0	5.00	95.00	9,972.1	-56.0	640.3	114.9	0.00	0.00	0.00
10,100.0	5.00	95.00	10,071.7	-56.8	649.0	116.4	0.00	0.00	0.00
10,200.0	5.00	95.00	10,171.3	-57.5	657.7	118.0	0.00	0.00	0.00
10,300.0	5.00	95.00	10,271.0	-58.3	666.4	119.6	0.00	0.00	0.00
10,400.0	5.00	95.00	10,370.6	-59.1	675.1	121.1	0.00	0.00	0.00
10,500.0	5.00	95.00	10,470.2	-59.8	683.7	122.7	0.00	0.00	0.00
10,600.0	5.00	95.00	10,569.8	-60.6	692.4	124.2	0.00	0.00	0.00
10,628.3	5.00	95.00	10,598.0	-60.8	694.9	124.7	0.00	0.00	0.00
FBSG_sand									
10,700.0	5.00	95.00	10,669.4	-61.3	701.1	125.8	0.00	0.00	0.00
10,800.0	5.00	95.00	10,769.0	-62.1	709.8	127.3	0.00	0.00	0.00
10,900.0	5.00	95.00	10,868.7	-62.9	718.5	128.9	0.00	0.00	0.00
11,000.0	5.00	95.00	10,968.3	-63.6	727.2	130.5	0.00	0.00	0.00
11,100.0	5.00	95.00	11,067.9	-64.4	735.8	132.0	0.00	0.00	0.00
11,161.3	5.00	95.00	11,129.0	-64.8	741.2	133.0	0.00	0.00	0.00
SBSG_sand									
11,200.0	5.00	95.00	11,167.5	-65.1	744.5	133.6	0.00	0.00	0.00
11,300.0	5.00	95.00	11,267.1	-65.9	753.2	135.1	0.00	0.00	0.00
11,400.0	5.00	95.00	11,366.8	-66.7	761.9	136.7	0.00	0.00	0.00
11,500.0	5.00	95.00	11,466.4	-67.4	770.6	138.2	0.00	0.00	0.00
11,600.0	5.00	95.00	11,566.0	-68.2	779.3	139.8	0.00	0.00	0.00
11,657.2	5.00	95.00	11,623.0	-68.6	784.2	140.7	0.00	0.00	0.00
SBSG_sand_Base									
11,700.0	5.00	95.00	11,665.6	-68.9	787.9	141.4	0.00	0.00	0.00
11,800.0	5.00	95.00	11,765.2	-69.7	796.6	142.9	0.00	0.00	0.00
11,900.0	5.00	95.00	11,864.9	-70.5	805.3	144.5	0.00	0.00	0.00
12,000.0	5.00	95.00	11,964.5	-71.2	814.0	146.0	0.00	0.00	0.00
12,100.0	5.00	95.00	12,064.1	-72.0	822.7	147.6	0.00	0.00	0.00
12,200.0	5.00	95.00	12,163.7	-72.7	831.3	149.2	0.00	0.00	0.00
12,264.5	5.00	95.00	12,228.0	-73.2	836.9	150.2	0.00	0.00	0.00
TBSG_sand									
12,300.0	5.00	95.00	12,263.3	-73.5	840.0	150.7	0.00	0.00	0.00
12,400.0	5.00	95.00	12,363.0	-74.3	848.7	152.3	0.00	0.00	0.00
12,425.7	5.00	95.00	12,388.6	-74.4	850.9	152.7	0.00	0.00	0.00
KOP - DLS 10.00 TFO 82.59									
12,450.0	5.83	119.40	12,412.8	-75.1	853.1	153.6	10.00	3.42	100.61
12,500.0	9.46	146.20	12,462.3	-79.8	857.6	158.6	10.00	7.27	53.61
12,550.0	13.96	157.15	12,511.3	-88.8	862.2	168.0	10.00	9.00	21.89
12,600.0	18.72	162.73	12,559.2	-102.0	866.9	181.6	10.00	9.50	11.16
12,650.0	23.57	166.10	12,605.9	-119.4	871.7	199.3	10.00	9.70	6.73
12,700.0	28.47	168.36	12,650.8	-140.8	876.5	221.1	10.00	9.80	4.53



Intrepid Planning Report




Database: EDM 5000.15 Single User Db
Company: Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Stove Pipe Federal) Sec-31_T-24-S_R-35-E
Well: Stove Pipe Federal Com #603H
Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: Well Stove Pipe Federal Com #603H
TVD Reference: KB @ 3378.4usft (Precision 106)
MD Reference: KB @ 3378.4usft (Precision 106)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,743.2	32.73	169.81	12,688.0	-162.4	880.7	243.0	10.00	9.85	3.35
WFMP									
12,750.0	33.40	170.01	12,693.7	-166.0	881.3	246.7	10.00	9.87	2.90
12,800.0	38.34	171.27	12,734.2	-194.9	886.1	275.9	10.00	9.89	2.53
12,850.0	43.30	172.28	12,772.0	-227.3	890.7	308.5	10.00	9.91	2.03
12,894.3	47.69	173.04	12,803.0	-258.6	894.8	340.0	10.00	9.93	1.70
WFMP A SHALE									
12,900.0	48.26	173.13	12,806.8	-262.8	895.3	344.3	10.00	9.93	1.57
12,950.0	53.23	173.85	12,838.5	-301.3	899.7	383.0	10.00	9.94	1.44
13,000.0	58.20	174.48	12,866.6	-342.3	903.8	424.3	10.00	9.95	1.27
13,050.0	63.18	175.05	12,891.1	-385.8	907.8	467.9	10.00	9.95	1.14
13,100.0	68.16	175.57	12,911.7	-431.1	911.5	513.4	10.00	9.95	1.04
13,150.0	73.14	176.06	12,928.3	-478.2	915.0	560.6	10.00	9.96	0.97
13,200.0	78.12	176.52	12,940.7	-526.5	918.1	609.0	10.00	9.96	0.92
13,250.0	83.10	176.96	12,948.8	-575.7	920.9	658.3	10.00	9.96	0.89
13,300.0	88.08	177.40	12,952.7	-625.5	923.4	708.1	10.00	9.96	0.87
13,322.1	90.28	177.59	12,953.0	-647.6	924.3	730.1	10.00	9.96	0.86
EOC/TRN - DLS 2.00 TFO 89.92									
13,400.0	90.28	179.15	12,952.6	-725.4	926.5	807.9	2.00	0.00	2.00
13,422.0	90.28	179.59	12,952.5	-747.5	926.8	829.8	2.00	0.00	2.00
Start 10028.6 hold at 13422.0 MD									
13,500.0	90.28	179.59	12,952.1	-825.4	927.3	907.5	0.00	0.00	0.00
13,600.0	90.28	179.59	12,951.6	-925.4	928.1	1,007.1	0.00	0.00	0.00
13,700.0	90.28	179.59	12,951.1	-1,025.4	928.8	1,106.8	0.00	0.00	0.00
13,800.0	90.28	179.59	12,950.6	-1,125.4	929.5	1,206.4	0.00	0.00	0.00
13,900.0	90.28	179.59	12,950.1	-1,225.4	930.2	1,306.1	0.00	0.00	0.00
14,000.0	90.28	179.59	12,949.6	-1,325.4	930.9	1,405.7	0.00	0.00	0.00
14,100.0	90.28	179.59	12,949.1	-1,425.4	931.6	1,505.3	0.00	0.00	0.00
14,200.0	90.28	179.59	12,948.7	-1,525.4	932.4	1,605.0	0.00	0.00	0.00
14,300.0	90.28	179.59	12,948.2	-1,625.4	933.1	1,704.6	0.00	0.00	0.00
14,400.0	90.28	179.59	12,947.7	-1,725.4	933.8	1,804.2	0.00	0.00	0.00
14,500.0	90.28	179.59	12,947.2	-1,825.4	934.5	1,903.9	0.00	0.00	0.00
14,600.0	90.28	179.59	12,946.7	-1,925.4	935.2	2,003.5	0.00	0.00	0.00
14,700.0	90.28	179.59	12,946.2	-2,025.4	936.0	2,103.1	0.00	0.00	0.00
14,800.0	90.28	179.59	12,945.7	-2,125.4	936.7	2,202.8	0.00	0.00	0.00
14,900.0	90.28	179.59	12,945.2	-2,225.4	937.4	2,302.4	0.00	0.00	0.00
15,000.0	90.28	179.59	12,944.7	-2,325.4	938.1	2,402.0	0.00	0.00	0.00
15,100.0	90.28	179.59	12,944.2	-2,425.4	938.8	2,501.7	0.00	0.00	0.00
15,200.0	90.28	179.59	12,943.7	-2,525.4	939.5	2,601.3	0.00	0.00	0.00
15,300.0	90.28	179.59	12,943.2	-2,625.4	940.3	2,700.9	0.00	0.00	0.00
15,400.0	90.28	179.59	12,942.7	-2,725.4	941.0	2,800.6	0.00	0.00	0.00
15,500.0	90.28	179.59	12,942.2	-2,825.4	941.7	2,900.2	0.00	0.00	0.00
15,600.0	90.28	179.59	12,941.7	-2,925.4	942.4	2,999.9	0.00	0.00	0.00
15,700.0	90.28	179.59	12,941.3	-3,025.4	943.1	3,099.5	0.00	0.00	0.00
15,800.0	90.28	179.59	12,940.8	-3,125.4	943.9	3,199.1	0.00	0.00	0.00
15,900.0	90.28	179.59	12,940.3	-3,225.4	944.6	3,298.8	0.00	0.00	0.00
16,000.0	90.28	179.59	12,939.8	-3,325.3	945.3	3,398.4	0.00	0.00	0.00
16,100.0	90.28	179.59	12,939.3	-3,425.3	946.0	3,498.0	0.00	0.00	0.00
16,200.0	90.28	179.59	12,938.8	-3,525.3	946.7	3,597.7	0.00	0.00	0.00
16,300.0	90.28	179.59	12,938.3	-3,625.3	947.4	3,697.3	0.00	0.00	0.00
16,400.0	90.28	179.59	12,937.8	-3,725.3	948.2	3,796.9	0.00	0.00	0.00
16,500.0	90.28	179.59	12,937.3	-3,825.3	948.9	3,896.6	0.00	0.00	0.00
16,600.0	90.28	179.59	12,936.8	-3,925.3	949.6	3,996.2	0.00	0.00	0.00
16,700.0	90.28	179.59	12,936.3	-4,025.3	950.3	4,095.8	0.00	0.00	0.00



Intrepid Planning Report



Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Stove Pipe Federal Com #603H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3378.4usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3378.4usft (Precision 106)
Site:	(Stove Pipe Federal) Sec-31_T-24-S_R-35-E	North Reference:	Grid
Well:	Stove Pipe Federal Com #603H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,800.0	90.28	179.59	12,935.8	-4,125.3	951.0	4,195.5	0.00	0.00	0.00
16,900.0	90.28	179.59	12,935.3	-4,225.3	951.8	4,295.1	0.00	0.00	0.00
17,000.0	90.28	179.59	12,934.8	-4,325.3	952.5	4,394.8	0.00	0.00	0.00
17,100.0	90.28	179.59	12,934.3	-4,425.3	953.2	4,494.4	0.00	0.00	0.00
17,200.0	90.28	179.59	12,933.8	-4,525.3	953.9	4,594.0	0.00	0.00	0.00
17,300.0	90.28	179.59	12,933.4	-4,625.3	954.6	4,693.7	0.00	0.00	0.00
17,400.0	90.28	179.59	12,932.9	-4,725.3	955.3	4,793.3	0.00	0.00	0.00
17,500.0	90.28	179.59	12,932.4	-4,825.3	956.1	4,892.9	0.00	0.00	0.00
17,600.0	90.28	179.59	12,931.9	-4,925.3	956.8	4,992.6	0.00	0.00	0.00
17,700.0	90.28	179.59	12,931.4	-5,025.3	957.5	5,092.2	0.00	0.00	0.00
17,800.0	90.28	179.59	12,930.9	-5,125.3	958.2	5,191.8	0.00	0.00	0.00
17,900.0	90.28	179.59	12,930.4	-5,225.3	958.9	5,291.5	0.00	0.00	0.00
18,000.0	90.28	179.59	12,929.9	-5,325.3	959.7	5,391.1	0.00	0.00	0.00
18,100.0	90.28	179.59	12,929.4	-5,425.3	960.4	5,490.7	0.00	0.00	0.00
18,200.0	90.28	179.59	12,928.9	-5,525.3	961.1	5,590.4	0.00	0.00	0.00
18,300.0	90.28	179.59	12,928.4	-5,625.3	961.8	5,690.0	0.00	0.00	0.00
18,400.0	90.28	179.59	12,927.9	-5,725.3	962.5	5,789.7	0.00	0.00	0.00
18,500.0	90.28	179.59	12,927.4	-5,825.3	963.2	5,889.3	0.00	0.00	0.00
18,600.0	90.28	179.59	12,926.9	-5,925.2	964.0	5,988.9	0.00	0.00	0.00
18,700.0	90.28	179.59	12,926.4	-6,025.2	964.7	6,088.6	0.00	0.00	0.00
18,800.0	90.28	179.59	12,926.0	-6,125.2	965.4	6,188.2	0.00	0.00	0.00
18,900.0	90.28	179.59	12,925.5	-6,225.2	966.1	6,287.8	0.00	0.00	0.00
19,000.0	90.28	179.59	12,925.0	-6,325.2	966.8	6,387.5	0.00	0.00	0.00
19,100.0	90.28	179.59	12,924.5	-6,425.2	967.6	6,487.1	0.00	0.00	0.00
19,200.0	90.28	179.59	12,924.0	-6,525.2	968.3	6,586.7	0.00	0.00	0.00
19,300.0	90.28	179.59	12,923.5	-6,625.2	969.0	6,686.4	0.00	0.00	0.00
19,400.0	90.28	179.59	12,923.0	-6,725.2	969.7	6,786.0	0.00	0.00	0.00
19,500.0	90.28	179.59	12,922.5	-6,825.2	970.4	6,885.6	0.00	0.00	0.00
19,600.0	90.28	179.59	12,922.0	-6,925.2	971.1	6,985.3	0.00	0.00	0.00
19,700.0	90.28	179.59	12,921.5	-7,025.2	971.9	7,084.9	0.00	0.00	0.00
19,800.0	90.28	179.59	12,921.0	-7,125.2	972.6	7,184.6	0.00	0.00	0.00
19,900.0	90.28	179.59	12,920.5	-7,225.2	973.3	7,284.2	0.00	0.00	0.00
20,000.0	90.28	179.59	12,920.0	-7,325.2	974.0	7,383.8	0.00	0.00	0.00
20,100.0	90.28	179.59	12,919.5	-7,425.2	974.7	7,483.5	0.00	0.00	0.00
20,200.0	90.28	179.59	12,919.0	-7,525.2	975.5	7,583.1	0.00	0.00	0.00
20,300.0	90.28	179.59	12,918.5	-7,625.2	976.2	7,682.7	0.00	0.00	0.00
20,400.0	90.28	179.59	12,918.1	-7,725.2	976.9	7,782.4	0.00	0.00	0.00
20,500.0	90.28	179.59	12,917.6	-7,825.2	977.6	7,882.0	0.00	0.00	0.00
20,600.0	90.28	179.59	12,917.1	-7,925.2	978.3	7,981.6	0.00	0.00	0.00
20,700.0	90.28	179.59	12,916.6	-8,025.2	979.0	8,081.3	0.00	0.00	0.00
20,800.0	90.28	179.59	12,916.1	-8,125.2	979.8	8,180.9	0.00	0.00	0.00
20,900.0	90.28	179.59	12,915.6	-8,225.2	980.5	8,280.5	0.00	0.00	0.00
21,000.0	90.28	179.59	12,915.1	-8,325.2	981.2	8,380.2	0.00	0.00	0.00
21,100.0	90.28	179.59	12,914.6	-8,425.2	981.9	8,479.8	0.00	0.00	0.00
21,200.0	90.28	179.59	12,914.1	-8,525.1	982.6	8,579.5	0.00	0.00	0.00
21,300.0	90.28	179.59	12,913.6	-8,625.1	983.4	8,679.1	0.00	0.00	0.00
21,400.0	90.28	179.59	12,913.1	-8,725.1	984.1	8,778.7	0.00	0.00	0.00
21,500.0	90.28	179.59	12,912.6	-8,825.1	984.8	8,878.4	0.00	0.00	0.00
21,600.0	90.28	179.59	12,912.1	-8,925.1	985.5	8,978.0	0.00	0.00	0.00
21,700.0	90.28	179.59	12,911.6	-9,025.1	986.2	9,077.6	0.00	0.00	0.00
21,800.0	90.28	179.59	12,911.1	-9,125.1	986.9	9,177.3	0.00	0.00	0.00
21,900.0	90.28	179.59	12,910.7	-9,225.1	987.7	9,276.9	0.00	0.00	0.00
22,000.0	90.28	179.59	12,910.2	-9,325.1	988.4	9,376.5	0.00	0.00	0.00
22,100.0	90.28	179.59	12,909.7	-9,425.1	989.1	9,476.2	0.00	0.00	0.00



Intrepid Planning Report



Database: EDM 5000.15 Single User Db
Company: Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Stove Pipe Federal) Sec-31_T-24-S_R-35-E
Well: Stove Pipe Federal Com #603H
Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: Well Stove Pipe Federal Com #603H
TVD Reference: KB @ 3378.4usft (Precision 106)
MD Reference: KB @ 3378.4usft (Precision 106)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
22,200.0	90.28	179.59	12,909.2	-9,525.1	989.8	9,575.8	0.00	0.00	0.00
22,300.0	90.28	179.59	12,908.7	-9,625.1	990.5	9,675.4	0.00	0.00	0.00
22,400.0	90.28	179.59	12,908.2	-9,725.1	991.3	9,775.1	0.00	0.00	0.00
22,500.0	90.28	179.59	12,907.7	-9,825.1	992.0	9,874.7	0.00	0.00	0.00
22,600.0	90.28	179.59	12,907.2	-9,925.1	992.7	9,974.4	0.00	0.00	0.00
22,700.0	90.28	179.59	12,906.7	-10,025.1	993.4	10,074.0	0.00	0.00	0.00
22,800.0	90.28	179.59	12,906.2	-10,125.1	994.1	10,173.6	0.00	0.00	0.00
22,900.0	90.28	179.59	12,905.7	-10,225.1	994.8	10,273.3	0.00	0.00	0.00
23,000.0	90.28	179.59	12,905.2	-10,325.1	995.6	10,372.9	0.00	0.00	0.00
23,100.0	90.28	179.59	12,904.7	-10,425.1	996.3	10,472.5	0.00	0.00	0.00
23,200.0	90.28	179.59	12,904.2	-10,525.1	997.0	10,572.2	0.00	0.00	0.00
23,300.0	90.28	179.59	12,903.7	-10,625.1	997.7	10,671.8	0.00	0.00	0.00
23,400.0	90.28	179.59	12,903.2	-10,725.1	998.4	10,771.4	0.00	0.00	0.00
23,450.6	90.28	179.59	12,903.0	-10,775.7	998.8	10,821.9	0.00	0.00	0.00

TD at 23450.6

Design Targets

Target Name

- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
LTP (Stove Pipe Federal) - plan misses target center by 0.7usft at 23400.0usft MD (12903.2 TVD, -10725.1 N, 998.4 E) - Point	0.00	0.00	12,903.0	-10,725.7	998.4	415,090.90	785,670.00	32° 8' 16.213 N	103° 24' 37.568 W
PBHL (Stove Pipe Federal) - plan hits target center - Rectangle (sides W60.0 H10,412.9 D30.0)	-0.28	179.59	12,903.0	-10,775.7	998.8	415,040.90	785,670.40	32° 8' 15.718 N	103° 24' 37.568 W
FTP (Stove Pipe Federal) - plan misses target center by 67.4usft at 13056.2usft MD (12893.8 TVD, -391.2 N, 908.3 E) - Point	0.00	0.00	12,953.0	-363.1	924.2	425,453.50	785,595.80	32° 9' 58.759 N	103° 24' 37.398 W



Intrepid Planning Report



Database: EDM 5000.15 Single User Db
Company: Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Stove Pipe Federal) Sec-31_T-24-S_R-35-E
Well: Stove Pipe Federal Com #603H
Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference: Well Stove Pipe Federal Com #603H
TVD Reference: KB @ 3378.4usft (Precision 106)
MD Reference: KB @ 3378.4usft (Precision 106)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
888.0	888.0	Rustler			
1,378.0	1,378.0	TOS			
5,227.7	5,218.0	BOS			
5,546.0	5,535.0	LMAR (Top Delaware)			
5,587.1	5,576.0	BLCN			
6,511.6	6,497.0	CYCN			
8,161.9	8,141.0	BYCN			
9,436.8	9,411.0	Bone Sprg (BSGL)			
10,628.3	10,598.0	FBSG_sand			
11,161.3	11,129.0	SBSG_sand			
11,657.2	11,623.0	SBSG_sand_Base			
12,264.5	12,228.0	TBSG_sand			
12,743.2	12,688.0	WFMP			
12,894.3	12,803.0	WFMP A SHALE			

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,500.0	2,500.0	0.0	0.0	NUDGE - Build 2.00
2,750.0	2,749.7	-1.0	10.9	HOLD - 9675.8 at 2750.0 MD
12,425.7	12,388.6	-74.4	850.9	KOP - DLS 10.00 TFO 82.59
13,322.1	12,953.0	-647.6	924.3	EOC/TRN - DLS 2.00 TFO 89.92
13,422.0	12,952.5	-747.5	926.8	Start 10028.6 hold at 13422.0 MD
23,450.6	12,903.0	-10,775.7	998.8	TD at 23450.6

DISTRICT I
1625 N. FRENCH DR., HOBBES, NM 86240
Phone: (505) 893-6161 Fax: (505) 893-0720

DISTRICT II
811 S. FIRST ST., ARTESIA, NM 86210
Phone: (505) 748-1253 Fax: (505) 748-0720

DISTRICT III
1000 RIO BRAZOS RD., AZTEC, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505
Phone: (505) 478-3460 Fax: (505) 478-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

□ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015 46500	Pool Code	Pool Name Wildcat; Bone Spring
Property Code	Property Name STOVE PIPE FEDERAL COM	Well Number 603H
OGRID No. 229137	Operator Name COG OPERATING, LLC	Elevation 3347.4'

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
4	31	24-S	35-E		270	SOUTH	390	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
4	7	25-S	35-E		50	SOUTH	1310	WEST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
639.08			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

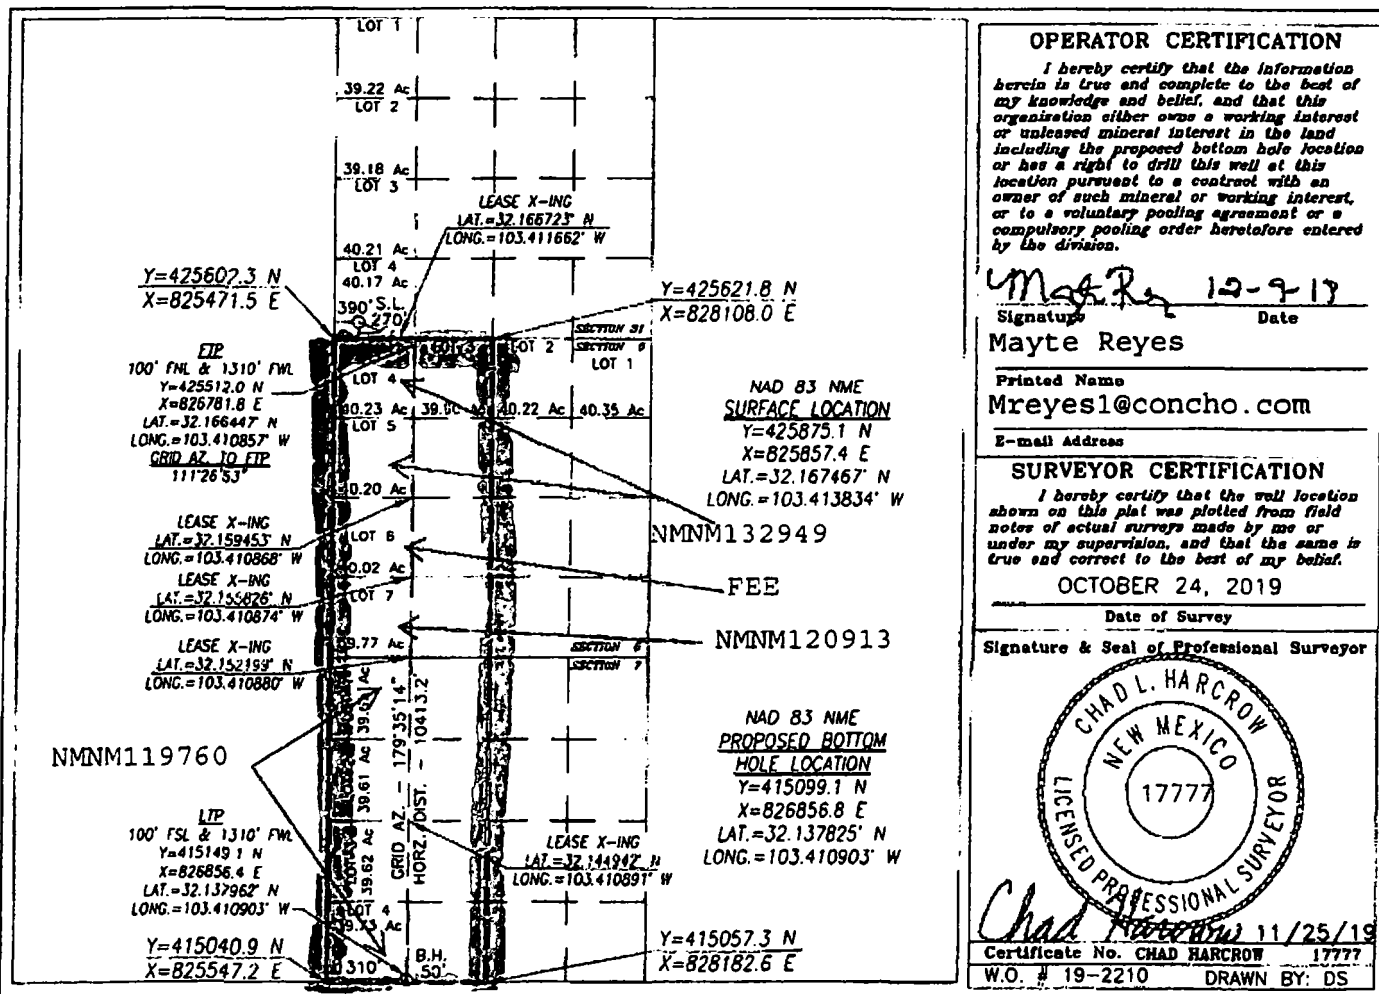

Per LR2000 Sec. 6 Lot 3: 40.15 Lot 4: 40.36 Lot 5: 40.12 Lot 6: 39.94 Lot 7: 39.75
Sec. 7 Lot 1: 39.67 Lot 2: 39.68 Lot 3: 39.70 Lot 4: 39.71