



PHOENIX
TECHNOLOGY SERVICES

March 12, 2020

Oil Conservation Division
State of New Mexico
1625 N. French Drive
Hobbs, New Mexico 88240

Dear District 1 - Hobbs

Re: Centennial Resources
Donkey Kong 1 Fed Com 603H
Lea County, NM
API #30-025-45683
Job No. 66215

Enclosed please find the Survey Data Certification, and the original Plat and one copy of the Survey Report performed on the above referenced well by Phoenix Technology Services, Inc. Other information required by your office is as follows:

Name & Title of Surveyor	Drain Hole Number	Surveyed Depths		Dates Performed		Type of Survey
		From	To	Start	End	
Blake Turner	603H	1,983	19,139	2/10/20	2/22/20	MWD

A certified plat on which the bottom hole location is oriented both to the surface location and to the lease lines (or unit lines in case of pooling) is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.

Best Regards,

Brittany Carley

Brittany Carley
Operations Administrator

**Phoenix Technology Services
SURVEY DATA CERTIFICATION**



PHOENIX JOB NUMBER

66215

ENERGY COMPANY Centennial Resources

WELL NAME

Donkey Kong 1 Fed Com 603 H

COUNTY & STATE

Lea County, NM

API WELL NUMBER

30-025-45683

PROPOSED DIRECTION

354.97

TIE-IN DATA						
MEASURED DEPTH	VERTICAL DEPTH	INCLIN	AZIMUTH	N-S COORD	E-W COORD	DATA SOURCE
1,891.5 ft	1,891.35 ft	1.20	242.66	-2.57 ft	-9.98 ft	Surface

FIRST SURVEY DATE	FIRST SURVEY DEPTH	INCLIN	AZIMUTH
10-Feb-20	1,983.00 ft	1.10	245.68

SURVEY INSTRUMENT

TYPE

Phoenix MWD Velocity

LAST SURVEY DATE	LAST SURVEY DEPTH	INCLIN	AZIMUTH
22-Feb-20	19,139.00 ft	90.19	1.46

TO THE BEST OF MY KNOWLEDGE I
CERTIFY THIS SURVEY DATA TO BE
TRUE AND CORRECT.

PROJECTED TD SURVEY DATE	PROJECTED TD SURVEY DEPTH	INCLIN	AZIMUTH
22-Feb-20	19,173.00 ft	90.19	1.46

Blake Turner

PRINT YOUR NAME ABOVE

Blake Turner

SIGN YOUR NAME ABOVE

2/22/2020

TODAY'S DATE

MAGNETIC DECLINATION OR TOTAL GRID

TOTAL CORRECTION USED	6.6
DECLINATION OR GRID	TRUENORTH

MWD SUPERVISOR 1

Peter Mavrelis

DIRECTIONAL DRILLER 1

Scot Middleton

MWD SUPERVISOR 2

Blake Turner

DIRECTIONAL DRILLER 2

Joe Doucette

12329 Cutten Rd., Houston, Texas 777066 (713)337-0600 (Voice), (713)337-0599 (Fax)



PHOENIX
TECHNOLOGY SERVICES

Centennial Resources Development, Inc.

**Lea County, NM (NAD83 - UTM Zone 13)
Donkey Kong 1 Fed Com
603H**

OH / 66215

Survey: Phoenix MWD Surveys

Standard Survey Report

24 February, 2020



Company: Centennial Resources Development, Inc.
Project: Lea County, NM (NAD83 - UTM Zone 13)
Site: Donkey Kong 1 Fed Com
Well: 603H
Wellbore: OH / 66215
Design: Surveys (H&P 618)

Local Co-ordinate Reference: Well 603H
TVD Reference: RKB @ 3391.00usft (H&P 618)
MD Reference: RKB @ 3391.00usft (H&P 618)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: USA Compass

Project	Lea County, NM (NAD83 - UTM Zone 13)		
Map System:	Universal Transverse Mercator (US Survey Fee	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Zone 13N (108 W to 102 W)		
	Using geodetic scale factor		

Site	Donkey Kong 1 Fed Com			
Site Position:		Northing:	11,739,812.05 usft	Latitude: 32.331713
From: Map		Eastings:	2,128,423.75 usft	Longitude: -103.419606
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence: 0.85 °

Well	603H			
Well Position	+N/-S	0.00 usft	Northing:	11,739,811.09 usft
	+E/-W	0.00 usft	Eastings:	2,128,363.78 usft
Position Uncertainty	1.00 usft		Wellhead Elevation:	usft
			Ground Level:	3,364.50 usft

Wellbore	OH / 66215				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	User Defined	2/9/2020	6.60	60.02	47,832.00000000

Design	Surveys (H&P 618)				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	1,891.50
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	354.97	

Survey Program	Date 2/24/2020			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
196.50	1,891.50	Invictus MWD Surveys (Surface)	MWD	OWSG MWD - Standard
1,983.00	19,173.00	Phoenix MWD Surveys (OH / 66215)	MWD+IFR1+MS	OWSG MWD + IFR1 + Multi-Station Correction

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Bulld Rate (°/100usft)	Turn Rate (°/100usft)
1,891.50	1.20	242.66	1,891.35	-2.57	-9.98	-1.69	0.00	0.00	0.00
1,983.00	1.10	245.68	1,982.83	-3.37	-11.63	-2.34	0.13	-0.11	3.30
First Phoenix MWD Survey									
2,078.00	1.70	268.73	2,077.80	-3.78	-13.87	-2.55	0.85	0.63	24.26
2,172.00	2.72	297.75	2,171.74	-2.77	-17.23	-1.25	1.58	1.09	30.87
2,267.00	3.79	305.43	2,266.58	0.10	-21.79	2.01	1.21	1.13	8.08
2,361.00	5.41	309.03	2,360.28	4.69	-27.76	7.10	1.75	1.72	3.83
2,455.00	7.17	307.91	2,453.71	11.08	-35.83	14.18	1.88	1.87	-1.19
2,549.00	9.01	304.45	2,546.77	18.85	-46.53	22.86	2.02	1.96	-3.68
2,643.00	10.55	302.48	2,639.40	27.64	-59.86	32.78	1.68	1.64	-2.10

Company: Centennial Resources Development, Inc.
Project: Lea County, NM (NAD83 - UTM Zone 13)
Site: Donkey Kong 1 Fed Com
Well: 603H
Wellbore: OH / 66215
Design: Surveys (H&P 618)

Local Co-ordinate Reference: Well 603H
TVD Reference: RKB @ 3391.00usft (H&P 618)
MD Reference: RKB @ 3391.00usft (H&P 618)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: USA Compass

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
2,738.00	10.95	302.42	2,732.73	37.15	-74.82	43.56	0.42	0.42	-0.06
2,832.00	10.92	302.81	2,825.03	46.76	-89.83	54.45	0.08	-0.03	0.41
2,927.00	10.98	302.43	2,918.30	56.48	-105.03	65.47	0.10	0.06	-0.40
3,021.00	10.93	302.82	3,010.58	66.11	-120.08	76.39	0.10	-0.05	0.41
3,115.00	10.95	303.35	3,102.87	75.85	-135.03	87.40	0.11	0.02	0.56
3,210.00	10.82	304.80	3,196.17	85.90	-149.88	98.71	0.32	-0.14	1.53
3,303.00	10.75	305.91	3,287.52	95.97	-164.08	109.99	0.24	-0.08	1.19
3,398.00	10.53	308.94	3,380.89	106.62	-178.01	121.82	0.63	-0.23	3.19
3,492.00	10.49	311.16	3,473.31	117.65	-191.13	133.96	0.43	-0.04	2.36
3,586.00	10.45	311.86	3,565.75	128.97	-203.92	146.36	0.14	-0.04	0.74
3,681.00	10.36	313.69	3,659.19	140.62	-216.51	159.07	0.36	-0.09	1.93
3,775.00	10.30	315.49	3,751.66	152.45	-228.52	171.90	0.35	-0.06	1.91
3,869.00	9.59	314.87	3,844.25	163.97	-239.96	184.38	0.76	-0.76	-0.66
3,963.00	9.35	314.59	3,936.97	174.86	-250.94	196.19	0.26	-0.26	-0.30
4,057.00	9.04	314.39	4,029.76	185.38	-261.66	207.61	0.33	-0.33	-0.21
4,151.00	9.03	312.03	4,122.60	195.49	-272.42	218.62	0.39	-0.01	-2.51
4,245.00	10.02	307.34	4,215.30	205.39	-284.40	229.53	1.34	1.05	-4.99
4,340.00	10.31	305.65	4,308.81	215.36	-297.88	240.64	0.44	0.31	-1.78
4,434.00	10.84	303.53	4,401.21	225.14	-312.08	251.64	0.70	0.56	-2.26
4,529.00	10.82	303.04	4,494.52	234.94	-327.00	262.70	0.10	-0.02	-0.52
4,623.00	10.64	303.89	4,586.88	244.59	-341.60	273.59	0.25	-0.19	0.90
4,717.00	10.63	303.39	4,679.26	254.20	-356.04	284.43	0.10	-0.01	-0.53
4,811.00	10.53	303.59	4,771.66	263.72	-370.44	295.18	0.11	-0.11	0.21
4,906.00	10.44	303.35	4,865.08	273.25	-384.86	305.95	0.11	-0.09	-0.25
5,000.00	10.28	304.05	4,957.54	282.63	-398.92	316.52	0.22	-0.17	0.74
5,094.00	10.05	305.15	5,050.07	292.05	-412.58	327.10	0.32	-0.24	1.17
5,132.00	9.98	304.65	5,087.49	295.83	-418.00	331.34	0.29	-0.18	-1.32
5,228.00	9.49	305.69	5,182.11	305.18	-431.27	341.82	0.54	-0.51	1.08
5,291.00	10.01	306.67	5,244.20	311.48	-439.88	348.85	0.87	0.83	1.56
5,385.00	12.49	305.74	5,336.38	322.30	-454.68	360.92	2.65	2.64	-0.99
5,479.00	12.57	305.63	5,428.15	334.19	-471.25	374.22	0.09	0.09	-0.12
5,574.00	11.07	306.27	5,521.13	345.61	-487.01	386.98	1.58	-1.58	0.67
5,668.00	11.11	305.90	5,613.37	356.26	-501.62	398.87	0.09	0.04	-0.39
5,762.00	10.77	306.05	5,705.66	366.74	-516.05	410.57	0.36	-0.36	0.16
5,857.00	10.49	304.29	5,799.03	376.83	-530.38	421.89	0.45	-0.29	-1.85
5,951.00	10.25	304.05	5,891.50	386.34	-544.37	432.58	0.26	-0.26	-0.26
6,045.00	10.04	301.35	5,984.03	395.28	-558.30	442.71	0.55	-0.22	-2.87
6,140.00	9.65	300.47	6,077.63	403.63	-572.24	452.25	0.44	-0.41	-0.93
6,234.00	9.67	299.63	6,170.30	411.53	-585.89	461.31	0.15	0.02	-0.89
6,328.00	10.40	312.09	6,262.87	421.12	-599.05	472.02	2.43	0.78	13.26
6,422.00	10.92	314.31	6,355.25	433.03	-611.72	484.99	0.70	0.55	2.36
6,517.00	11.28	312.71	6,448.47	445.61	-624.98	498.70	0.50	0.38	-1.68
6,611.00	11.31	311.45	6,540.65	457.95	-638.65	512.18	0.26	0.03	-1.34

Company: Centennial Resources Development, Inc.
Project: Lea County, NM (NAD83 - UTM Zone 13)
Site: Donkey Kong 1 Fed Com
Well: 603H
Wellbore: OH / 66215
Design: Surveys (H&P 618)

Local Co-ordinate Reference: Well 603H
TVD Reference: RKB @ 3391.00usft (H&P 618)
MD Reference: RKB @ 3391.00usft (H&P 618)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: USA Compass

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
6,705.00	10.88	311.54	6,632.89	469.94	-652.20	525.31	0.46	-0.46	0.10
6,799.00	10.69	311.77	6,725.23	481.63	-665.34	538.11	0.21	-0.20	0.24
6,893.00	10.33	312.82	6,817.66	493.16	-678.02	550.71	0.43	-0.38	1.12
6,988.00	9.78	312.47	6,911.20	504.40	-690.22	562.97	0.58	-0.58	-0.37
7,082.00	9.41	311.86	7,003.88	514.92	-701.83	574.47	0.41	-0.39	-0.65
7,176.00	8.23	317.48	7,096.77	525.01	-712.11	585.42	1.55	-1.26	5.98
7,271.00	7.57	321.35	7,190.87	534.91	-720.61	596.03	0.89	-0.69	4.07
7,365.00	5.73	320.68	7,284.23	543.37	-727.45	605.06	1.96	-1.96	-0.71
7,459.00	5.71	318.72	7,377.76	550.52	-733.51	612.71	0.21	-0.02	-2.09
7,553.00	5.09	315.44	7,471.35	557.00	-739.52	619.70	0.74	-0.66	-3.49
7,648.00	4.55	311.88	7,566.01	562.52	-745.28	625.70	0.65	-0.57	-3.75
7,742.00	4.31	307.61	7,659.73	567.16	-750.86	630.81	0.43	-0.26	-4.54
7,836.00	3.88	307.65	7,753.49	571.26	-756.17	635.36	0.46	-0.46	0.04
7,931.00	3.40	309.87	7,848.30	575.03	-760.88	639.53	0.53	-0.51	2.34
8,025.00	2.25	322.19	7,942.18	578.28	-764.15	643.05	1.38	-1.22	13.11
8,119.00	1.67	317.29	8,036.13	580.74	-766.21	645.68	0.64	-0.62	-5.21
8,214.00	0.99	300.78	8,131.10	582.18	-767.85	647.26	0.81	-0.72	-17.38
8,308.00	1.35	302.97	8,225.08	583.20	-769.48	648.42	0.39	0.38	2.33
8,403.00	1.60	295.78	8,320.05	584.38	-771.61	649.78	0.33	0.26	-7.57
8,497.00	1.11	304.47	8,414.02	585.47	-773.55	651.04	0.56	-0.52	9.24
8,591.00	1.41	301.44	8,508.00	586.59	-775.28	652.30	0.33	0.32	-3.22
8,685.00	1.62	293.57	8,601.97	587.72	-777.49	653.63	0.31	0.22	-8.37
8,779.00	1.56	286.68	8,695.93	588.62	-779.93	654.74	0.21	-0.06	-7.33
8,874.00	1.73	274.93	8,790.89	589.11	-782.60	655.46	0.40	0.18	-12.37
8,968.00	1.82	268.55	8,884.85	589.20	-785.51	655.80	0.23	0.10	-6.79
9,062.00	1.71	263.55	8,978.80	589.00	-788.39	655.86	0.20	-0.12	-5.32
9,157.00	1.84	257.56	9,073.76	588.52	-791.29	655.63	0.24	0.14	-6.31
9,251.00	2.04	258.43	9,167.70	587.85	-794.40	655.24	0.22	0.21	0.93
9,345.00	1.91	235.47	9,261.65	586.63	-797.33	654.28	0.85	-0.14	-24.43
9,440.00	1.36	171.15	9,356.62	584.62	-798.46	652.38	1.90	-0.58	-67.71
9,534.00	2.30	137.76	9,450.57	582.12	-797.02	649.76	1.47	1.00	-35.52
9,628.00	2.81	135.34	9,544.48	579.09	-794.14	646.48	0.55	0.54	-2.57
9,723.00	2.84	136.06	9,639.36	575.73	-790.87	642.86	0.05	0.03	0.76
9,817.00	2.52	133.25	9,733.26	572.64	-787.74	639.50	0.37	-0.34	-2.99
9,912.00	2.08	127.10	9,828.18	570.17	-784.85	636.79	0.53	-0.46	-6.47
10,006.00	0.99	102.58	9,922.15	568.96	-782.70	635.40	1.33	-1.16	-26.09
10,100.00	0.94	107.87	10,016.14	568.55	-781.17	634.85	0.11	-0.05	5.63
10,195.00	0.55	106.62	10,111.13	568.18	-779.99	634.38	0.41	-0.41	-1.32
10,289.00	0.58	326.61	10,205.13	568.45	-779.82	634.63	1.13	0.03	-148.95
10,384.00	0.97	289.05	10,300.12	569.11	-780.84	635.38	0.65	0.41	-39.54
10,478.00	1.71	270.04	10,394.09	569.37	-783.00	635.83	0.91	0.79	-20.22
10,573.00	2.32	267.55	10,489.03	569.29	-786.34	636.04	0.65	0.64	-2.62
10,667.00	1.37	286.09	10,582.98	569.52	-789.32	636.54	1.18	-1.01	19.72

Company: Centennial Resources Development, Inc.
Project: Lea County, NM (NAD83 - UTM Zone 13)
Site: Donkey Kong 1 Fed Com
Well: 603H
Wellbore: OH / 66215
Design: Surveys (H&P 618)

Local Co-ordinate Reference: Well 603H
TVD Reference: RKB @ 3391.00usft (H&P 618)
MD Reference: RKB @ 3391.00usft (H&P 618)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: USA Compass

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,761.00	1.67	352.28	10,676.96	571.19	-790.58	638.31	1.79	0.32	70.41
10,816.00	1.58	355.72	10,731.93	572.74	-790.75	639.87	0.24	-0.16	6.25
10,907.00	2.39	353.77	10,822.88	575.88	-791.05	643.02	0.89	0.89	-2.14
10,954.00	7.20	2.24	10,869.70	579.80	-791.04	646.92	10.32	10.23	18.02
11,001.00	11.77	2.62	10,916.05	587.54	-790.70	654.60	9.72	9.72	0.81
11,048.00	17.13	4.44	10,961.54	599.23	-789.95	666.19	11.44	11.40	3.87
11,096.00	21.72	4.02	11,006.80	615.15	-788.78	681.94	9.57	9.56	-0.88
11,143.00	26.84	4.36	11,049.63	634.42	-787.36	701.01	10.90	10.89	0.72
11,190.00	31.30	4.22	11,090.70	657.18	-785.65	723.54	9.49	9.49	-0.30
11,237.00	37.08	4.41	11,129.56	683.51	-783.66	749.59	12.30	12.30	0.40
11,285.00	41.39	4.26	11,166.73	713.77	-781.37	779.53	8.98	8.98	-0.31
11,332.00	45.21	4.20	11,200.93	745.91	-778.99	811.34	8.13	8.13	-0.13
11,379.00	48.19	2.16	11,233.16	780.06	-777.11	845.19	7.08	6.34	-4.34
11,426.00	51.55	2.24	11,263.45	815.96	-775.73	880.84	7.15	7.15	0.17
11,473.00	54.75	3.35	11,291.63	853.52	-773.89	918.09	7.07	6.81	2.36
11,520.00	58.64	3.12	11,317.43	892.73	-771.68	956.95	8.29	8.28	-0.49
11,568.00	61.38	3.11	11,341.42	934.24	-769.42	998.10	5.71	5.71	-0.02
11,615.00	65.31	1.90	11,362.50	976.20	-767.59	1,039.74	8.67	8.36	-2.57
11,662.00	69.41	0.79	11,380.59	1,019.55	-766.58	1,082.84	8.99	8.72	-2.36
11,709.00	72.36	0.56	11,395.98	1,063.95	-766.06	1,127.02	6.29	6.28	-0.49
11,756.00	75.87	0.75	11,408.84	1,109.15	-765.54	1,172.00	7.48	7.47	0.40
11,850.00	85.80	2.60	11,423.80	1,201.79	-762.81	1,264.04	10.74	10.56	1.97
11,944.00	86.09	0.85	11,430.45	1,295.51	-759.99	1,357.15	1.88	0.31	-1.86
12,039.00	85.37	359.52	11,437.52	1,390.24	-759.68	1,451.49	1.59	-0.76	-1.40
12,133.00	89.24	358.27	11,441.94	1,484.10	-761.49	1,545.15	4.33	4.12	-1.33
12,192.00	91.66	358.18	11,441.48	1,543.07	-763.32	1,604.05	4.10	4.10	-0.15
12,274.00	92.23	358.63	11,438.69	1,624.99	-765.60	1,685.85	0.89	0.70	0.55
12,368.00	91.87	0.49	11,435.33	1,718.92	-766.32	1,779.49	2.01	-0.38	1.98
12,462.00	91.67	1.53	11,432.43	1,812.86	-764.67	1,872.92	1.13	-0.21	1.11
12,556.00	91.01	2.50	11,430.23	1,906.77	-761.36	1,966.18	1.25	-0.70	1.03
12,648.00	91.53	3.13	11,428.19	1,998.64	-756.84	2,057.30	0.89	0.57	0.68
12,742.00	91.29	3.61	11,425.88	2,092.45	-751.32	2,150.26	0.57	-0.26	0.51
12,836.00	90.96	3.58	11,424.03	2,186.24	-745.43	2,243.18	0.35	-0.35	-0.03
12,930.00	91.10	3.69	11,422.34	2,280.04	-739.47	2,336.09	0.19	0.15	0.12
13,024.00	90.93	3.44	11,420.68	2,373.84	-733.62	2,429.02	0.32	-0.18	-0.27
13,119.00	91.53	2.15	11,418.64	2,468.70	-728.99	2,523.11	1.50	0.63	-1.36
13,214.00	90.93	1.53	11,416.60	2,563.63	-725.94	2,617.41	0.91	-0.63	-0.65
13,308.00	91.44	1.40	11,414.65	2,657.58	-723.54	2,710.79	0.56	0.54	-0.14
13,402.00	91.27	1.54	11,412.43	2,751.52	-721.13	2,804.16	0.23	-0.18	0.15
13,497.00	90.82	0.25	11,410.70	2,846.50	-719.65	2,898.63	1.44	-0.47	-1.36
13,591.00	90.84	359.67	11,409.34	2,940.48	-719.71	2,992.26	0.62	0.02	-0.62
13,685.00	90.65	359.66	11,408.11	3,034.48	-720.26	3,085.94	0.20	-0.20	-0.01
13,780.00	91.06	358.37	11,406.70	3,129.45	-721.89	3,180.69	1.42	0.43	-1.36
13,874.00	91.36	358.84	11,404.71	3,223.40	-724.18	3,274.48	0.59	0.32	0.50

Company: Centennial Resources Development, Inc.
Project: Lea County, NM (NAD83 - UTM Zone 13)
Site: Donkey Kong 1 Fed Com
Well: 603H
Wellbore: OH / 66215
Design: Surveys (H&P 618)

Local Co-ordinate Reference: Well 603H
TVD Reference: RKB @ 3391.00usft (H&P 618)
MD Reference: RKB @ 3391.00usft (H&P 618)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: USA Compass

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,968.00	91.73	358.49	11,402.18	3,317.34	-726.37	3,368.25	0.54	0.39	-0.37
14,063.00	92.04	358.77	11,399.05	3,412.26	-728.64	3,463.01	0.44	0.33	0.29
14,157.00	92.20	358.66	11,395.57	3,506.17	-730.75	3,556.74	0.21	0.17	-0.12
14,251.00	92.21	359.13	11,391.96	3,600.09	-732.56	3,650.45	0.50	0.01	0.50
14,345.00	91.84	359.02	11,388.64	3,694.01	-734.08	3,744.15	0.41	-0.39	-0.12
14,440.00	91.60	359.27	11,385.79	3,788.96	-735.49	3,838.86	0.36	-0.25	0.26
14,534.00	91.09	358.31	11,383.58	3,882.91	-737.48	3,932.62	1.16	-0.54	-1.02
14,628.00	91.12	358.51	11,381.77	3,976.86	-740.09	4,026.43	0.22	0.03	0.21
14,723.00	91.18	358.29	11,379.86	4,071.80	-742.74	4,121.24	0.24	0.06	-0.23
14,817.00	90.95	358.21	11,378.11	4,165.74	-745.61	4,215.07	0.26	-0.24	-0.09
14,912.00	90.93	358.79	11,376.55	4,260.70	-748.09	4,309.88	0.61	-0.02	0.61
15,006.00	91.13	358.21	11,374.86	4,354.65	-750.55	4,403.69	0.65	0.21	-0.62
15,100.00	90.95	358.74	11,373.16	4,448.60	-753.06	4,497.49	0.60	-0.19	0.56
15,194.00	90.95	358.84	11,371.60	4,542.57	-755.04	4,591.27	0.11	0.00	0.11
15,288.00	89.90	359.40	11,370.90	4,636.55	-756.48	4,685.02	1.27	-1.12	0.60
15,383.00	90.04	0.12	11,370.95	4,731.55	-756.88	4,779.69	0.77	0.15	0.76
15,477.00	90.02	0.49	11,370.90	4,825.55	-756.38	4,873.28	0.39	-0.02	0.39
15,572.00	90.05	0.77	11,370.84	4,920.54	-755.34	4,967.82	0.30	0.03	0.29
15,666.00	89.82	0.96	11,370.95	5,014.53	-753.92	5,061.32	0.32	-0.24	0.20
15,761.00	90.13	0.04	11,370.99	5,109.53	-753.09	5,155.88	1.02	0.33	-0.97
15,855.00	89.88	359.64	11,370.98	5,203.53	-753.35	5,249.54	0.50	-0.27	-0.43
15,950.00	90.45	359.96	11,370.71	5,298.52	-753.68	5,344.20	0.69	0.60	0.34
16,044.00	90.45	0.31	11,369.97	5,392.52	-753.46	5,437.81	0.37	0.00	0.37
16,138.00	90.52	0.32	11,369.18	5,486.52	-752.94	5,531.40	0.08	0.07	0.01
16,233.00	90.30	0.59	11,368.50	5,581.51	-752.19	5,625.97	0.37	-0.23	0.28
16,327.00	90.87	0.42	11,367.54	5,675.50	-751.36	5,719.52	0.63	0.61	-0.18
16,422.00	90.64	0.18	11,366.29	5,770.49	-750.86	5,814.10	0.35	-0.24	-0.25
16,516.00	90.69	0.22	11,365.19	5,864.48	-750.54	5,907.70	0.07	0.05	0.04
16,610.00	90.53	0.03	11,364.19	5,958.48	-750.33	6,001.32	0.26	-0.17	-0.20
16,705.00	90.49	0.00	11,363.35	6,053.48	-750.31	6,095.95	0.05	-0.04	-0.03
16,799.00	90.65	359.71	11,362.41	6,147.47	-750.54	6,189.60	0.35	0.17	-0.31
16,893.00	91.12	359.61	11,360.96	6,241.46	-751.10	6,283.28	0.51	0.50	-0.11
16,987.00	91.04	359.45	11,359.19	6,335.44	-751.87	6,376.96	0.19	-0.09	-0.17
17,082.00	91.10	359.38	11,357.42	6,430.42	-752.84	6,471.66	0.10	0.06	-0.07
17,176.00	90.69	359.09	11,355.95	6,524.40	-754.10	6,565.39	0.53	-0.44	-0.31
17,271.00	91.01	359.39	11,354.54	6,619.38	-755.36	6,660.11	0.46	0.34	0.32
17,365.00	90.96	359.33	11,352.92	6,713.36	-756.41	6,753.82	0.08	-0.05	-0.06
17,459.00	90.89	359.36	11,351.40	6,807.34	-757.48	6,847.54	0.08	-0.07	0.03
17,554.00	91.09	359.58	11,349.76	6,902.32	-758.36	6,942.23	0.31	0.21	0.23
17,648.00	90.95	359.36	11,348.09	6,996.30	-759.23	7,035.92	0.28	-0.15	-0.23
17,742.00	91.07	359.50	11,346.43	7,090.28	-760.17	7,129.63	0.20	0.13	0.15
17,837.00	91.50	359.49	11,344.30	7,185.25	-761.00	7,224.31	0.45	0.45	-0.01
17,931.00	90.81	359.59	11,342.41	7,279.23	-761.76	7,317.99	0.74	-0.73	0.11

Company: Centennial Resources Development, Inc.
Project: Lea County, NM (NAD83 - UTM Zone 13)
Site: Donkey Kong 1 Fed Com
Well: 603H
Wellbore: OH / 66215
Design: Surveys (H&P 618)

Local Co-ordinate Reference: Well 603H
TVD Reference: RKB @ 3391.00usft (H&P 618)
MD Reference: RKB @ 3391.00usft (H&P 618)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: USA Compass


Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18,026.00	91.04	359.60	11,340.87	7,374.22	-762.43	7,412.67	0.24	0.24	0.01
18,120.00	91.24	359.72	11,339.00	7,468.20	-762.99	7,506.33	0.25	0.21	0.13
18,215.00	90.86	359.49	11,337.26	7,563.18	-763.64	7,601.00	0.47	-0.40	-0.24
18,310.00	90.65	359.88	11,336.01	7,658.17	-764.16	7,695.68	0.47	-0.22	0.41
18,404.00	90.27	359.43	11,335.26	7,752.16	-764.73	7,789.36	0.63	-0.40	-0.48
18,499.00	90.45	359.51	11,334.66	7,847.16	-765.61	7,884.06	0.21	0.19	0.08
18,593.00	90.07	359.29	11,334.23	7,941.15	-766.59	7,977.78	0.47	-0.40	-0.23
18,688.00	90.67	0.61	11,333.62	8,036.15	-766.67	8,072.42	1.53	0.63	1.39
18,782.00	90.33	1.08	11,332.80	8,130.13	-765.29	8,165.92	0.62	-0.36	0.50
18,876.00	90.30	1.15	11,332.28	8,224.11	-763.46	8,259.38	0.08	-0.03	0.07
18,971.00	91.44	1.35	11,330.84	8,319.08	-761.39	8,353.80	1.22	1.20	0.21
19,065.00	89.24	1.20	11,330.28	8,413.05	-759.30	8,447.22	2.35	-2.34	-0.16
19,139.00	90.19	1.46	11,330.65	8,487.02	-757.58	8,520.76	1.33	1.28	0.35
Final Phoenix MWD Survey									
19,173.00	90.19	1.46	11,330.54	8,521.01	-756.71	8,554.54	0.00	0.00	0.00
Projection to TD									

Survey Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,891.50				Tie In
1,983.00	1,982.83	-3.37	-11.63	First Phoenix MWD Survey
19,139.00	11,330.65	8,487.02	-757.58	Final Phoenix MWD Survey
19,173.00	11,330.54	8,521.01	-756.71	Projection to TD



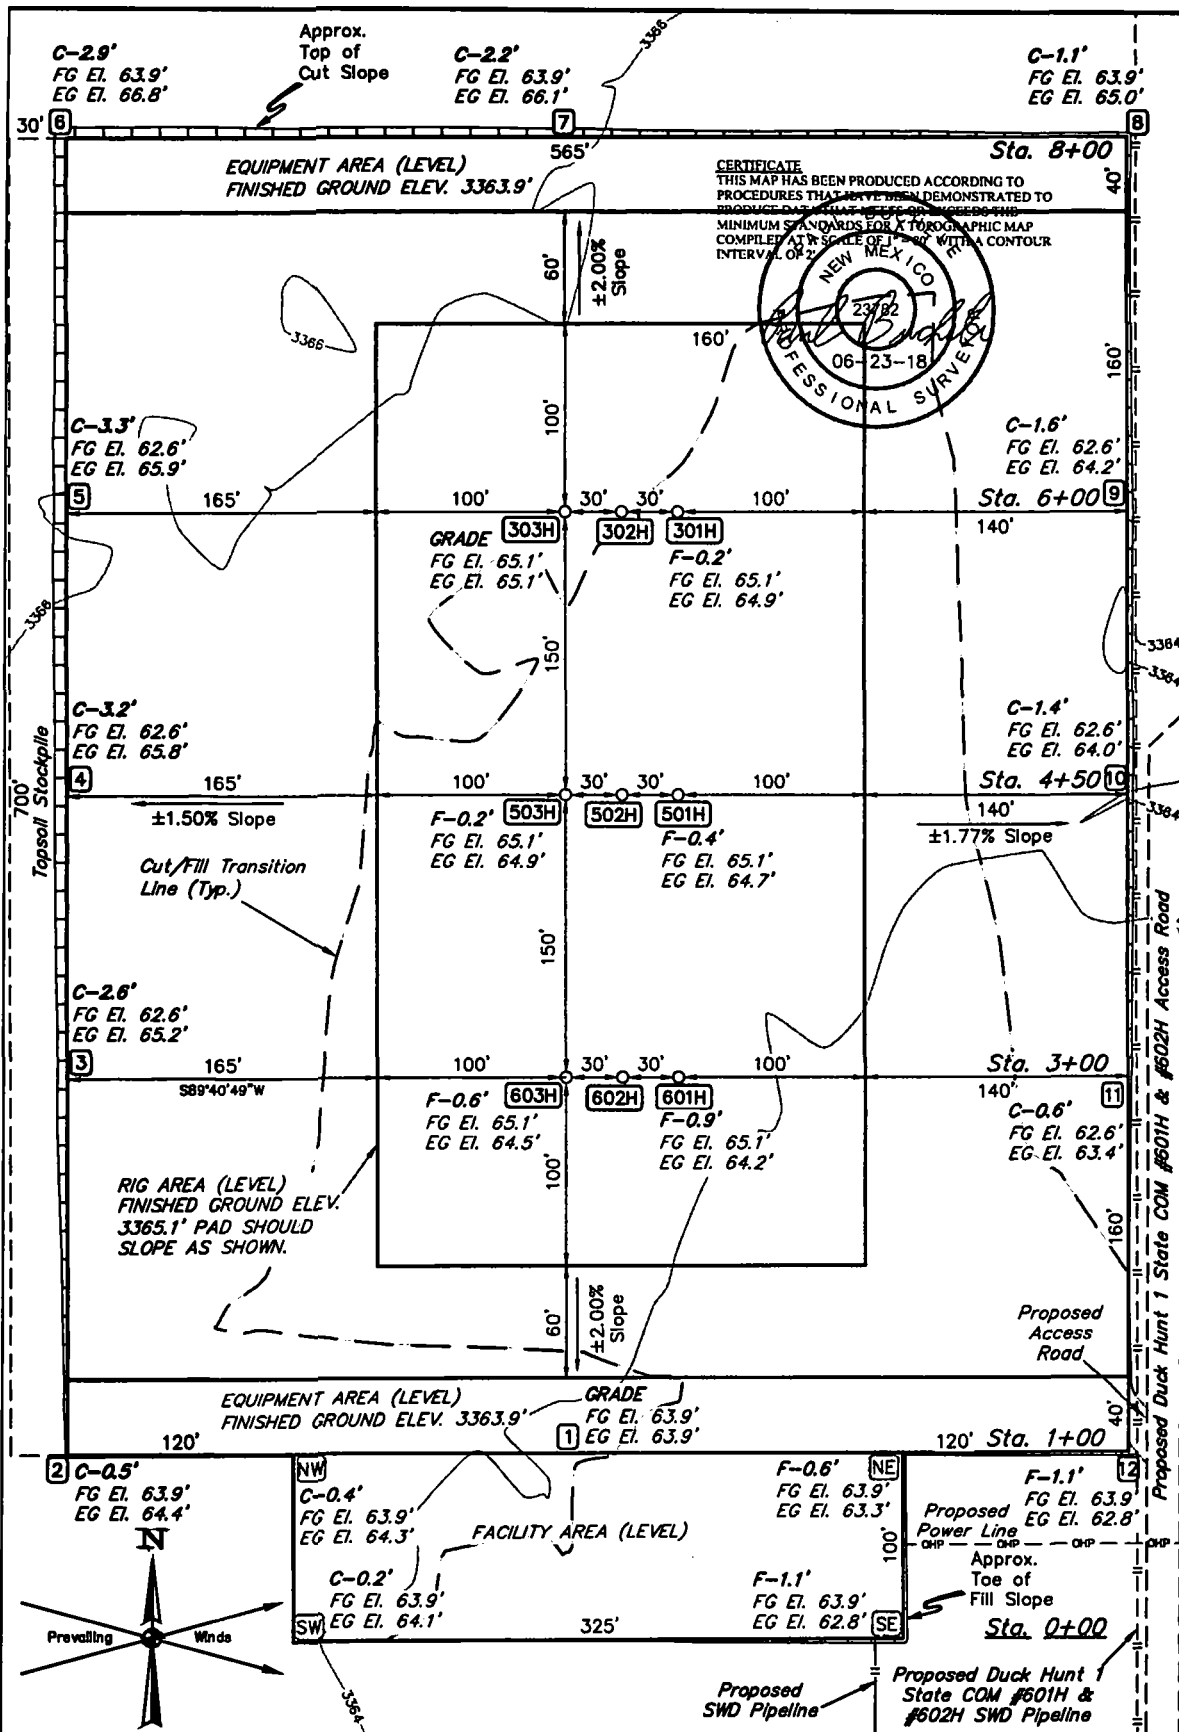

- NOTES:**
- Flare pit is to be located a min. of 100' from the wellhead.
 - Contours shown at 2' intervals.
 - Cut/Fill slopes 2:1 (Typ. except where noted)
 - Underground utilities shown on this sheet are for visualization purposes only, actual locations to be determined prior to construction.
 - Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

CENTENNIAL RESOURCE PRODUCTION, LLC

DONKEY KONG 1 FED COM #301H, #302H, #303H, #501H, #502H, #503H, #601H, #602H & #603H
NW 1/4 SE 1/4, SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO



SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	06-01-18	1" = 80'

LOCATION LAYOUT FIGURE #1



UELS, LLC
Corporate Office • 85 South 200 East
Vernal, UT 84078 • (435) 789-1017

1" = 40'
X-Section
Scale
1" = 100'

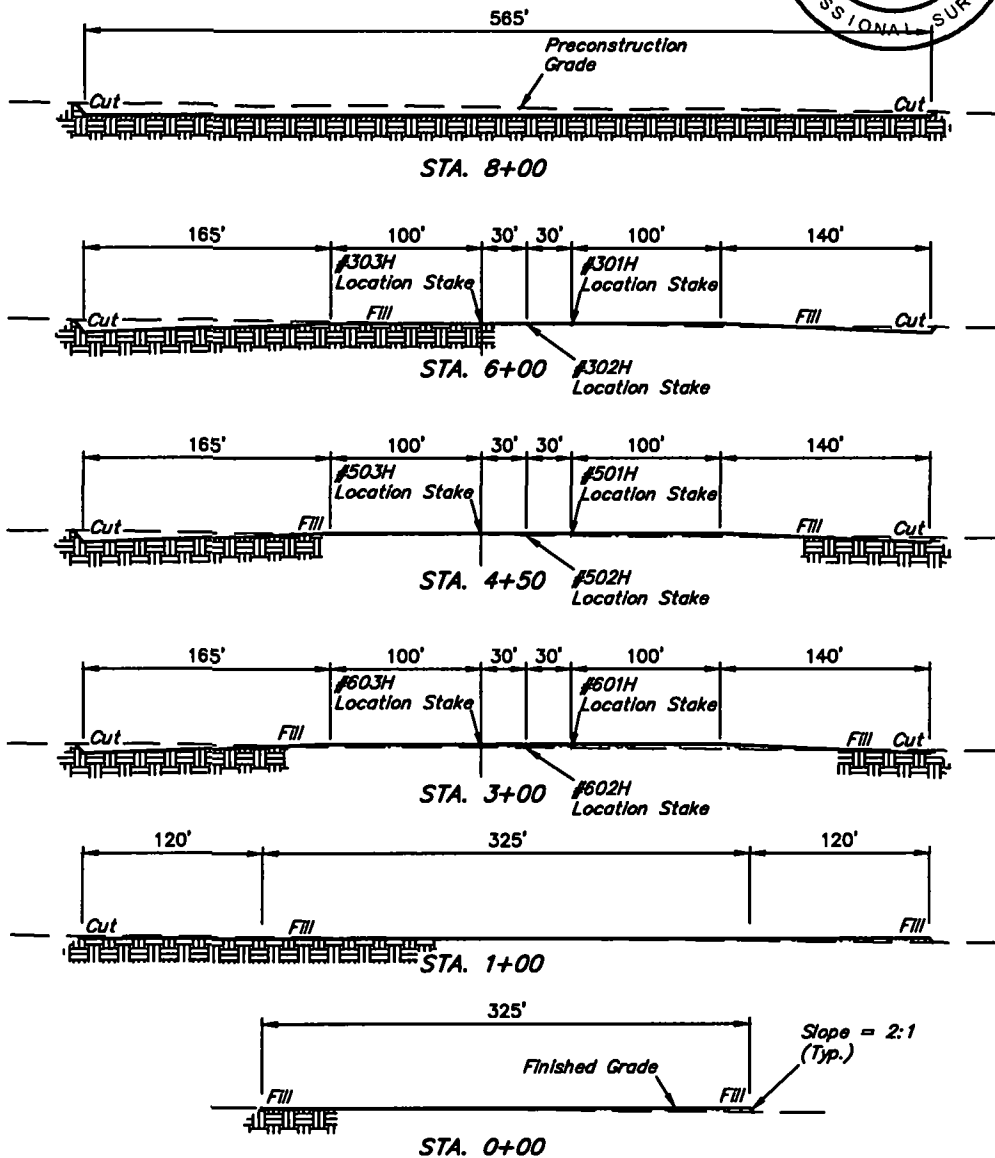

APPROXIMATE EARTHWORK QUANTITIES	
(4") TOPSOIL STRIPPING	5,390 Cu. Yds.
REMAINING LOCATION	7,290 Cu. Yds.
TOTAL CUT	12,680 Cu. Yds.
FILL	7,290 Cu. Yds.
EXCESS MATERIAL	5,390 Cu. Yds.
TOPSOIL	5,390 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	0 Cu. Yds.

APPROXIMATE SURFACE DISTURBANCE AREAS		
	DISTANCE	ACRES
WELL SITE DISTURBANCE	NA	±10.414
30' WIDE ACCESS ROAD R-O-W DISTURBANCE	±28.98'	±0.020
30' WIDE POWER LINE R-O-W DISTURBANCE	±170.05'	±0.117
30' WIDE SWD PIPELINE R-O-W DISTURBANCE	±184.53'	±0.127
TOTAL SURFACE USE AREA		±10.678

NOTES:

- Fill quantity includes 5% for compaction.
- Cut/Fill slopes 2:1 (Typ. except where noted)

CENTENNIAL RESOURCE PRODUCTION, LLC



DONKEY KONG 1 FED COM #301H, #302H, #303H,
#501H, #502H, #503H, #601H, #602H & #603H
NW 1/4 SE 1/4, SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO

SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	06-01-18	AS SHOWN


TYPICAL CROSS SECTIONS FIGURE #2



UELS, LLC
Corporate Office • 85 South 200 East
Vernal, UT 84078 • (435) 789-1017



665' X 900' Archaeological Survey Boundary

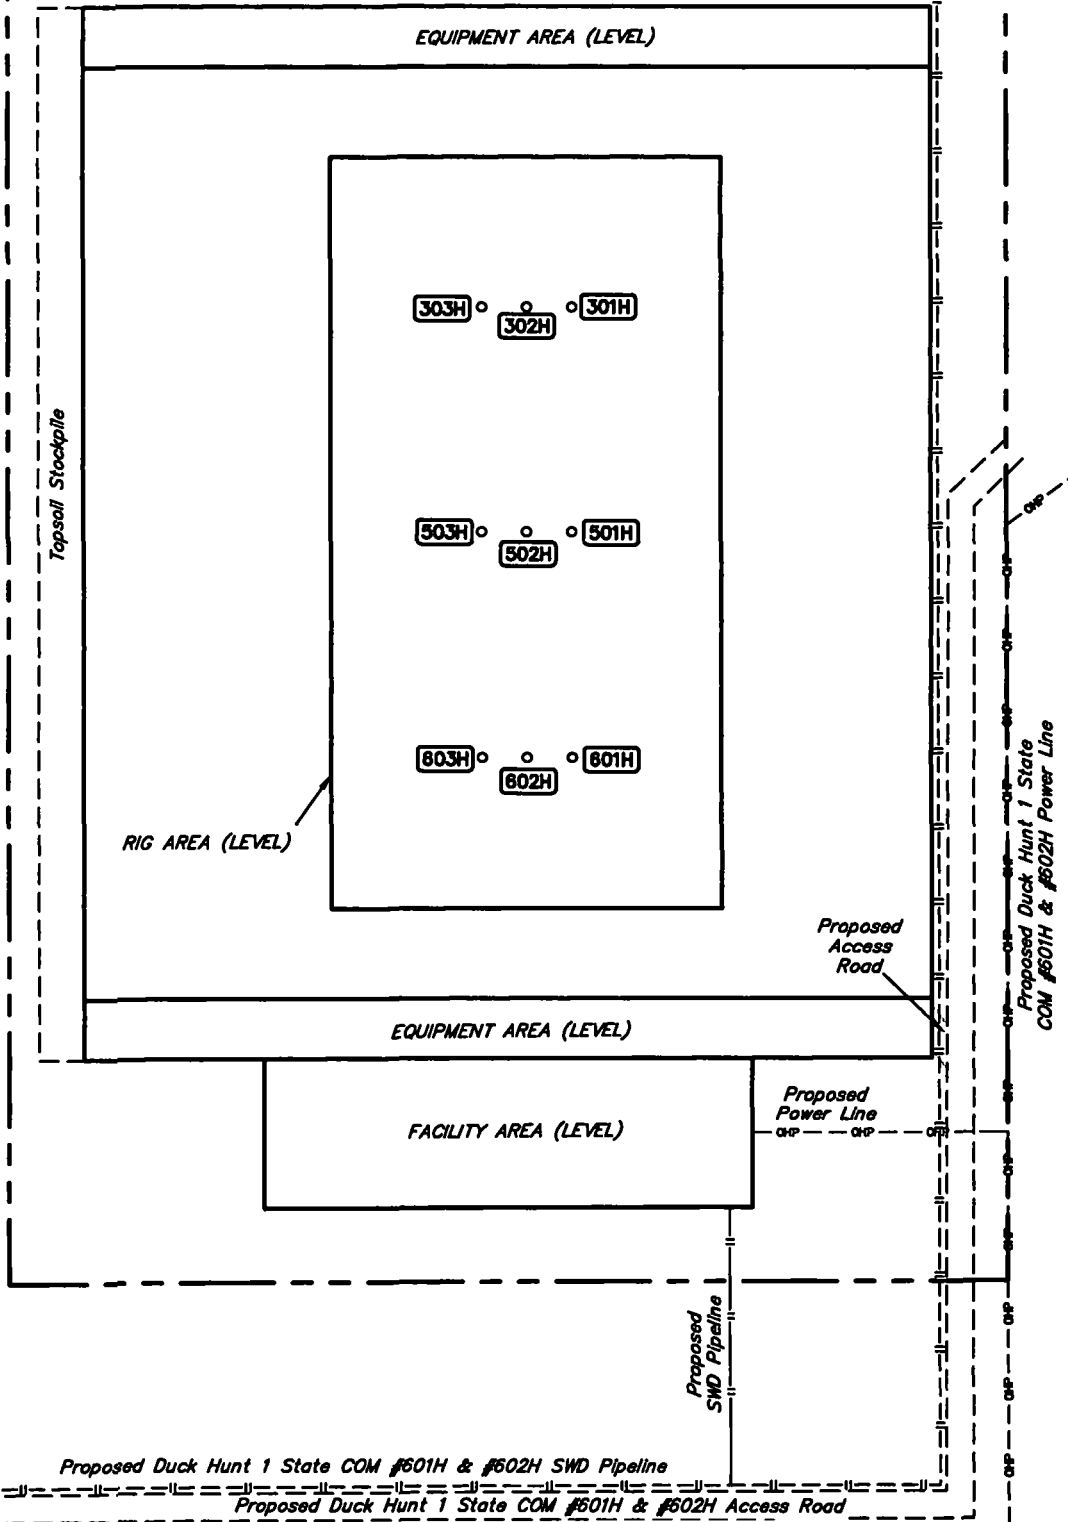

NOTES:

CENTENNIAL RESOURCE PRODUCTION, LLC

DONKEY KONG 1 FED COM #301H, #302H, #303H,
#501H, #502H, #503H, #601H, #602H & #603H
NW 1/4 SE 1/4, SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO



SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	06-01-18	1" = 80'
ARCHAEOLOGICAL SURVEY BOUNDARY FIGURE #4			



UELS, LLC
Corporate Office • 85 South 200 East
Vernal, UT 84078 • (435) 789-1017

Approx.
Top of
Cut Slope

CERTIFICATE
THIS MAP HAS BEEN PRODUCED ACCORDING TO
PROCEDURES THAT HAVE BEEN DEMONSTRATED TO
PRODUCE DATA THAT MEET OR EXCEED THE
MINIMUM STANDARDS FOR A TOPOGRAPHIC MAP
COMPILED BY THE STATE OF NEW MEXICO
INTERVAL OF 2

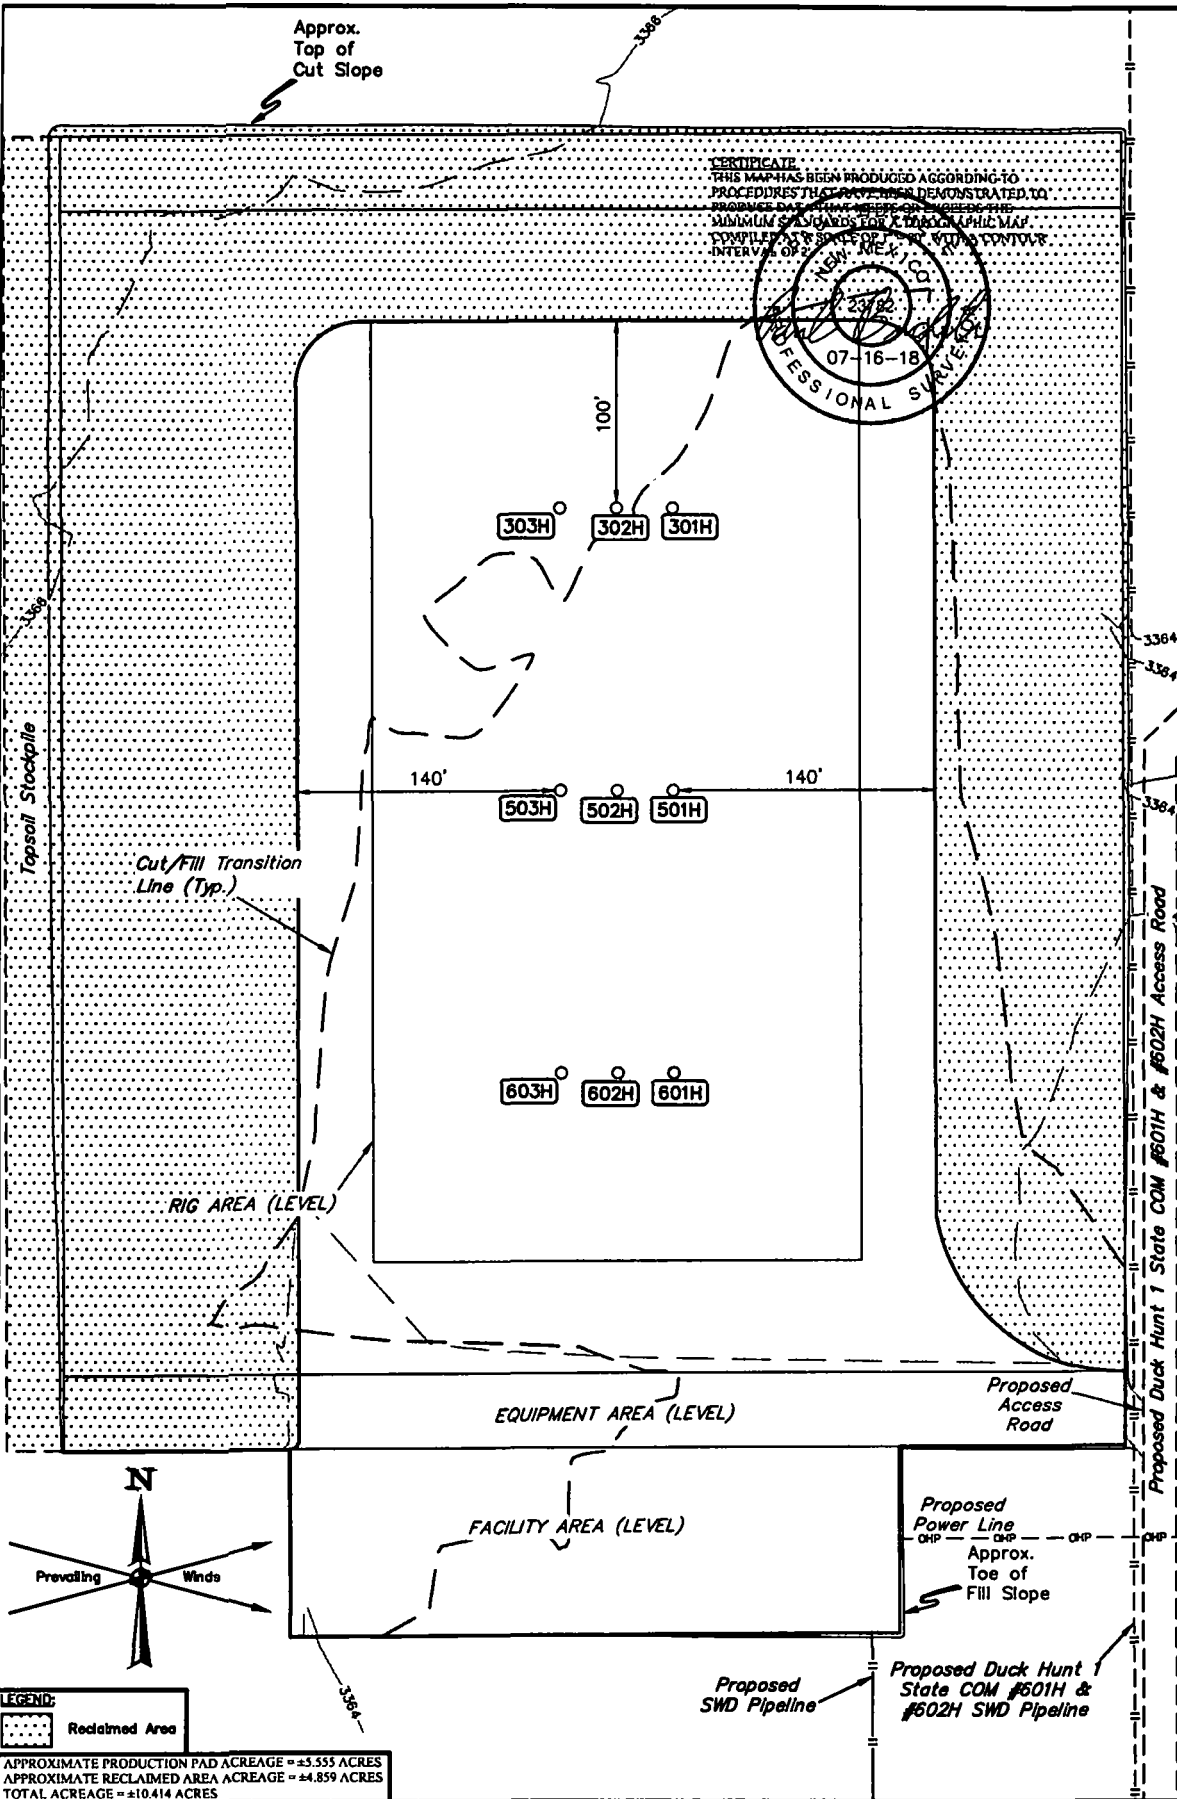

LEGEND:
Reclaimed Area

APPROXIMATE PRODUCTION PAD ACREAGE = ±3.555 ACRES
APPROXIMATE RECLAIMED AREA ACREAGE = ±4.859 ACRES
TOTAL ACREAGE = ±10.414 ACRES

NOTES:

CENTENNIAL RESOURCE PRODUCTION, LLC


DONKEY KONG 1 FED COM #301H, #302H, #303H,
#501H, #502H, #503H, #601H, #602H & #603H
NW 1/4 SE 1/4, SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	07-16-18	1" = 80'

RECLAMATION DIAGRAM FIGURE #5

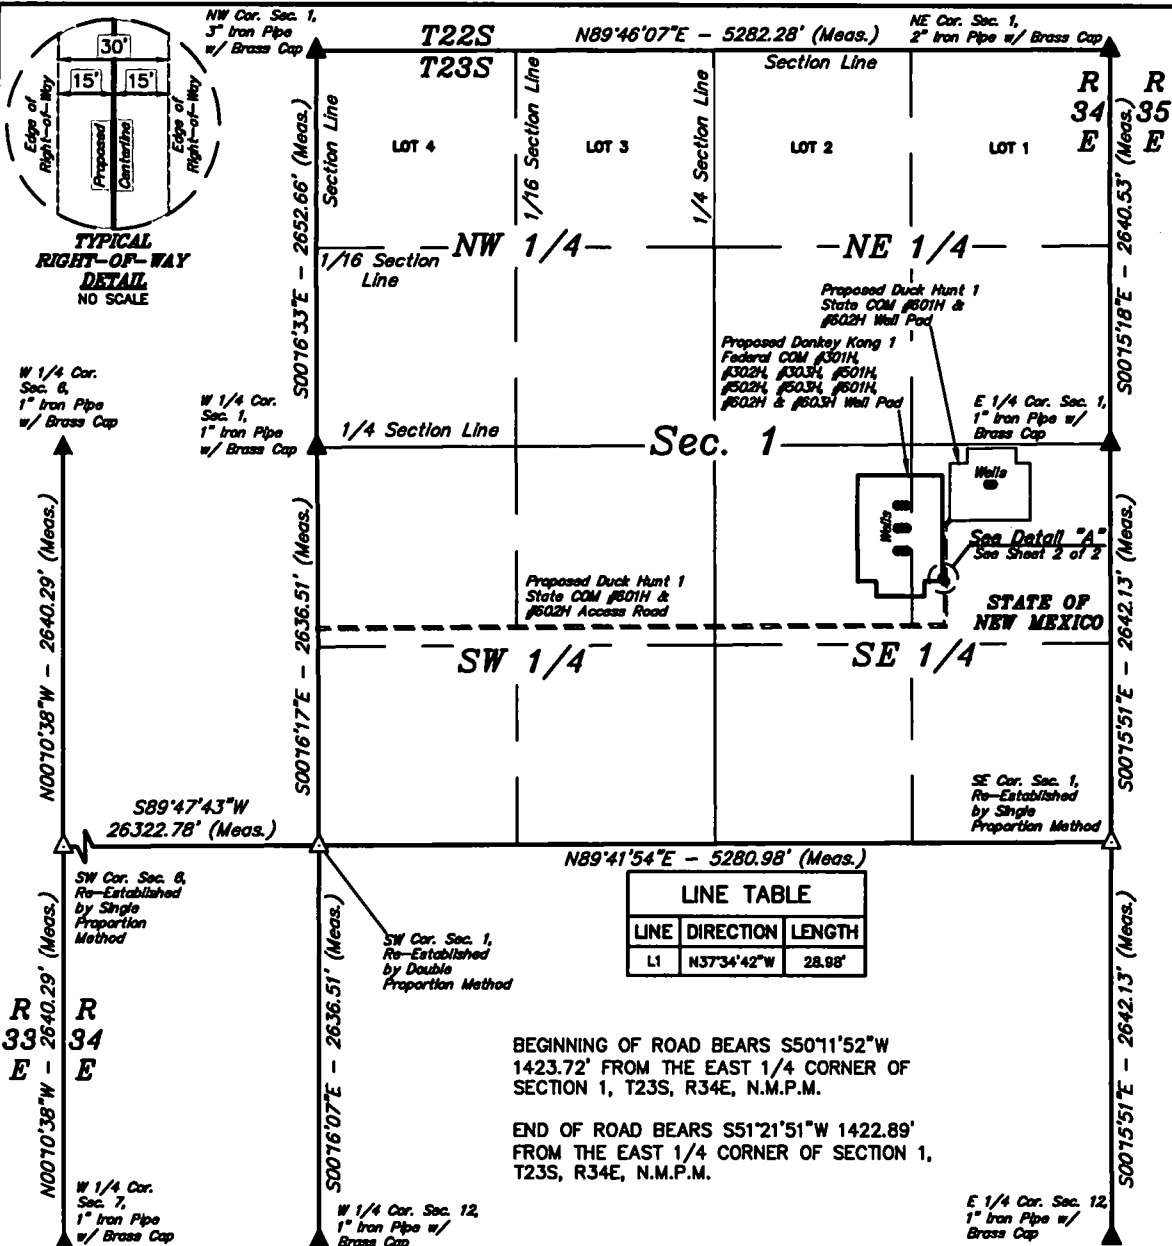

ROAD RIGHT-OF-WAY DESCRIPTION ON STATE OF NEW MEXICO LANDS IN SECTION 1
A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE NE 1/4 SE 1/4 OF SECTION 1, T23S, R34E, N.M.P.M., WHICH BEARS S50°11'52"W 1423.72' FROM THE EAST 1/4 CORNER OF SAID SECTION 1, THENCE N37°34'42"W 28.98' TO A POINT IN THE NE 1/4 SE 1/4 OF SAID SECTION 1, WHICH BEARS S51°21'51"W 1422.89' FROM THE EAST 1/4 CORNER OF SAID SECTION 1. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A TRANSVERSE MERCATOR PROJECTION WITH A CENTRAL MERIDIAN OF W103°53'00". CONTAINS 0.020 ACRES MORE OR LESS.



ACREAGE / LENGTH TABLE				
	OWNERSHIP	FEET	RODS	ACRES
SEC. 1 (NE 1/4 SE 1/4)	STATE OF NEW MEXICO	28.98	1.76	0.020

- ▲ = SECTION CORNERS LOCATED.
- △ = SECTION CORNERS RE-ESTABLISHED.
(Not Set on Ground.)

FILE: 64140-A

Sheet 1 of 2

NOTES:

- The maximum grade of existing ground for the proposed access road is +0.71%.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

CENTENNIAL RESOURCE PRODUCTION, LLC
DONKEY KONG 1 FED COM #301H, #302H, #303H, #501H, #502H, #503H, #601H, #602H & #603H
ON STATE OF NEW MEXICO LANDS IN
SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO

UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017



SURVEYED BY	B.B. R.C.	05-25-18	SCALE
DRAWN BY	C.D.	05-31-18	1" = 1000'


ACCESS ROAD R-O-W

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY THEREON ARE BASED UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Paul Backe
23/02
06-25-18
PROFESSIONAL SURVEYOR

END OF
PROPOSED ROAD
RIGHT-OF-WAY
(At Edge of
Proposed Well Pad)


Detail "A"
No Scale

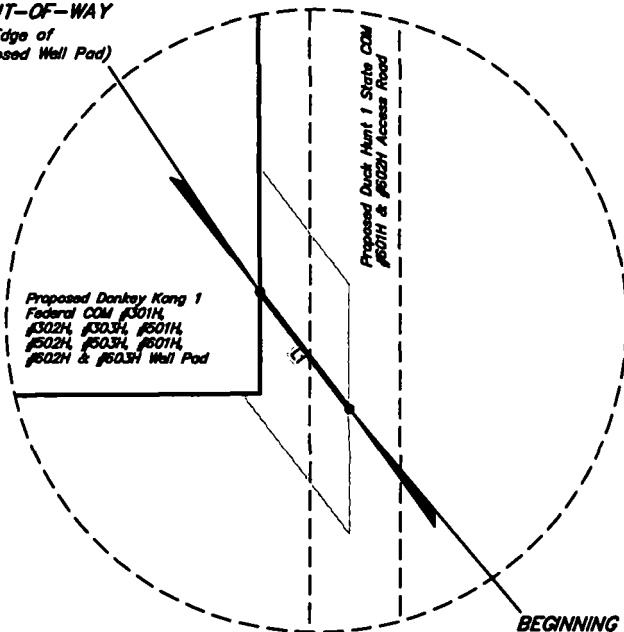

BEGINNING OF PROPOSED
ROAD RIGHT-OF-WAY
(At the Centerline of the
Proposed Duck Hunt 1 State COM
#601H & #602H Access Road)

CERTIFICATE

THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 64140-B

Sheet 2 of 2

NOTES:

* Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

CENTENNIAL RESOURCE PRODUCTION, LLC


DONKEY KONG 1 FED COM #301H, #302H, #303H, #501H,
#502H, #503H, #601H, #602H & #603H
ON STATE OF NEW MEXICO LANDS IN
SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO

SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	05-31-18	N/A

ACCESS ROAD R-O-W




UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

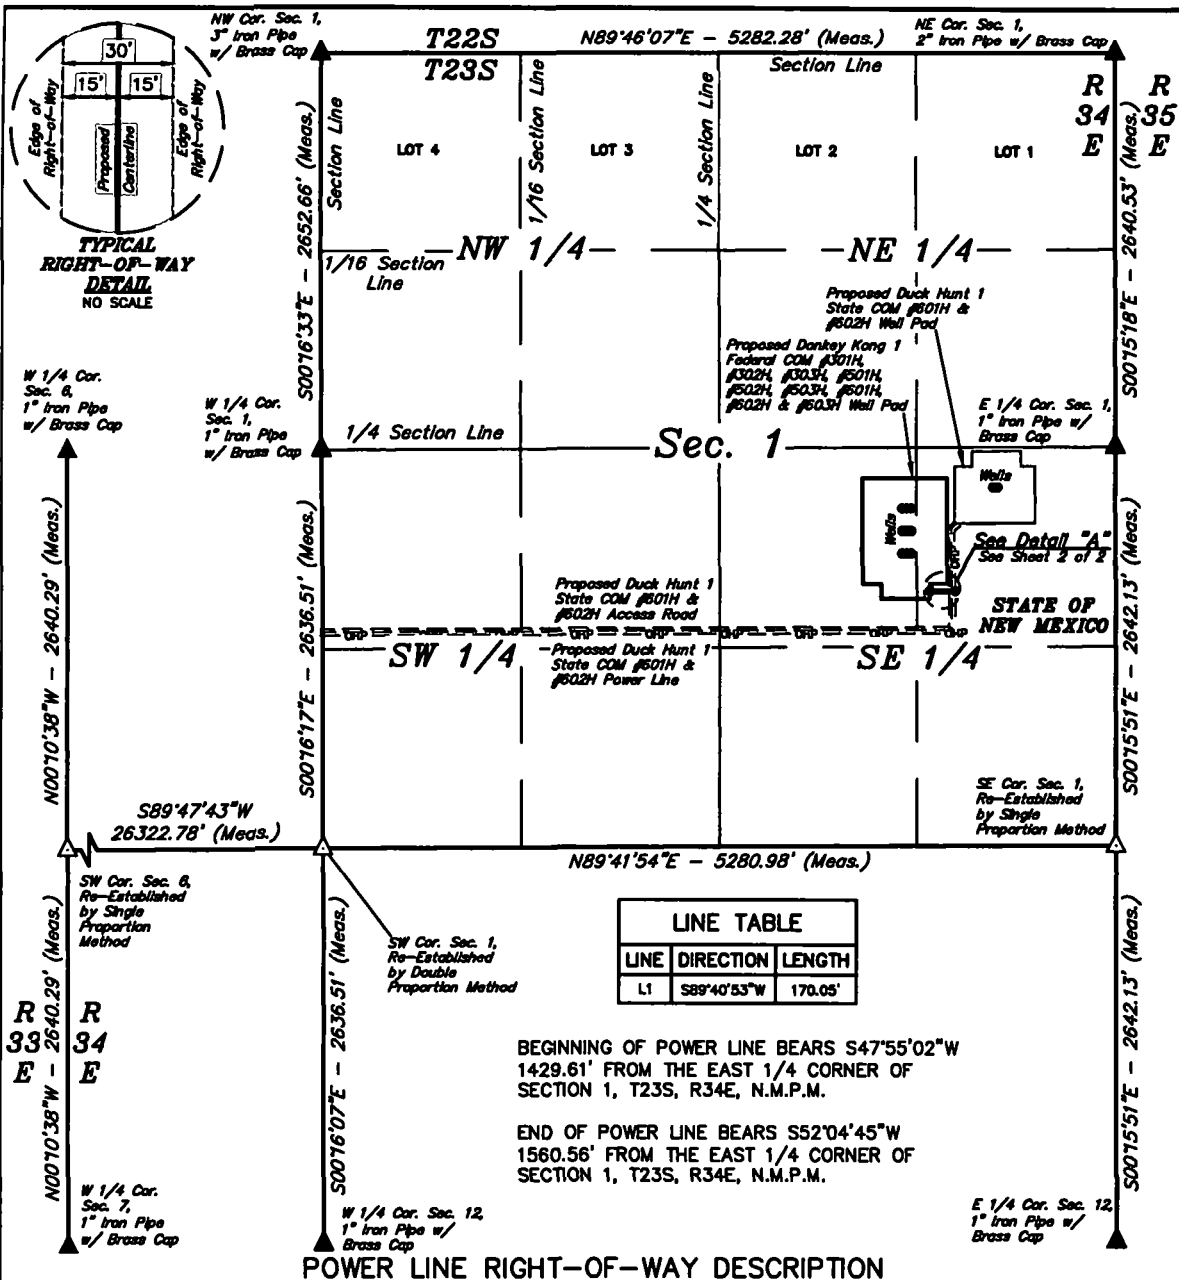

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE NE 1/4 SE 1/4 OF SECTION 1, T23S, R34E, N.M.P.M., WHICH BEARS S47°55'02"W 1429.61' FROM THE EAST 1/4 CORNER OF SAID SECTION 1, THENCE S89°40'53"W 95.05' TO A POINT IN THE NE 1/4 SE 1/4 OF SAID SECTION 1, WHICH BEARS S52°04'45"W 1560.56' FROM THE EAST 1/4 CORNER OF SAID SECTION 1. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A TRANSVERSE MERCATOR PROJECTION WITH A CENTRAL MERIDIAN OF W103°53'00". CONTAINS 0.117 ACRES MORE OR LESS.

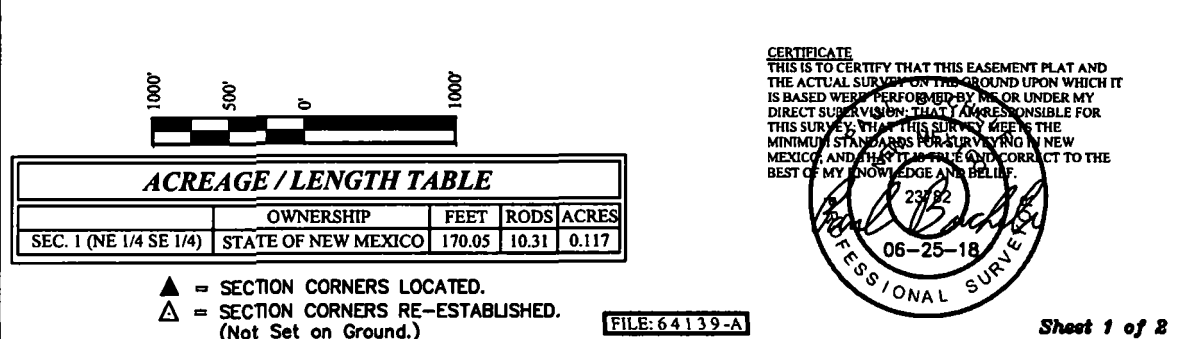

NOTES:
• Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

CENTENNIAL RESOURCE PRODUCTION, LLC

DONKEY KONG 1 FED COM #301H, #302H, #303H, #501H, #502H, #503H, #601H, #602H & #603H
ON STATE OF NEW MEXICO LANDS IN
SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO


SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	05-31-18	1" = 1000'

POWER LINE R-O-W


UETAH
ENGINEERING & LAND SURVEYING

UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

Detail "A"
No Scale

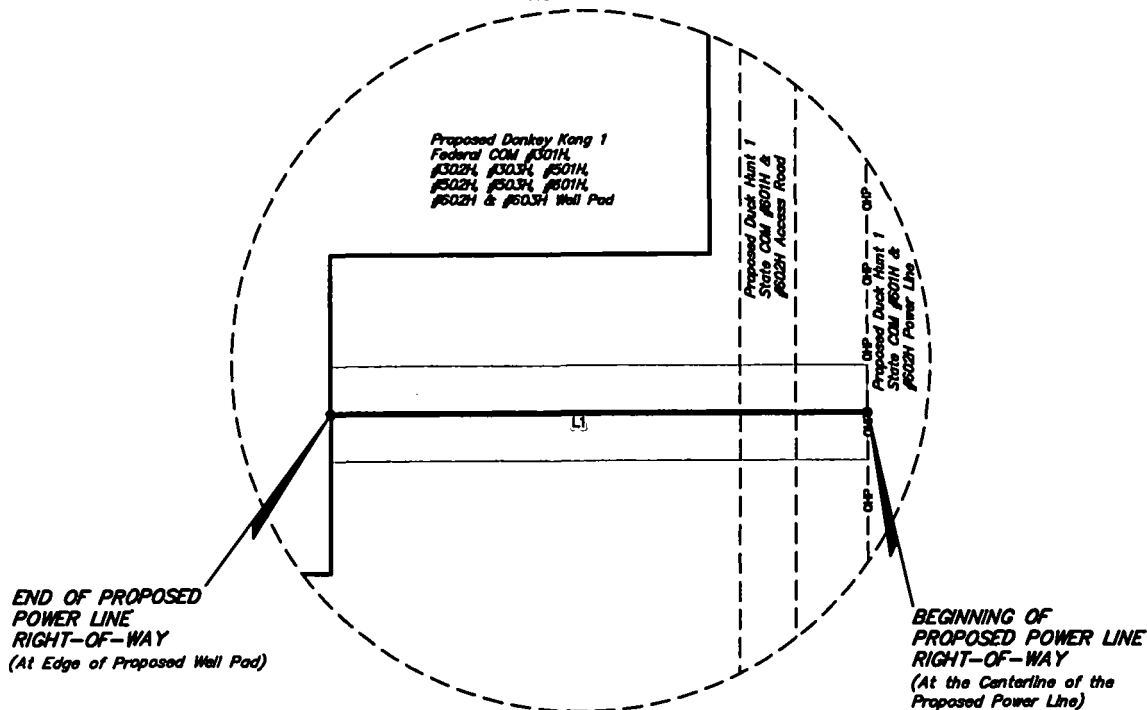

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 64139-B

Sheet 2 of 2

NOTES:

* Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

CENTENNIAL RESOURCE PRODUCTION, LLC


DONKEY KONG 1 FED COM #301H, #302H, #303H, #501H, #502H, #503H, #601H, #602H & #603H
ON STATE OF NEW MEXICO LANDS IN
SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO

SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	05-31-18	N/A

POWER LINE R-O-W




UELS, LLC
Corporate Office • 85 South 200 East
Vernal, UT 84078 • (435) 789-1017

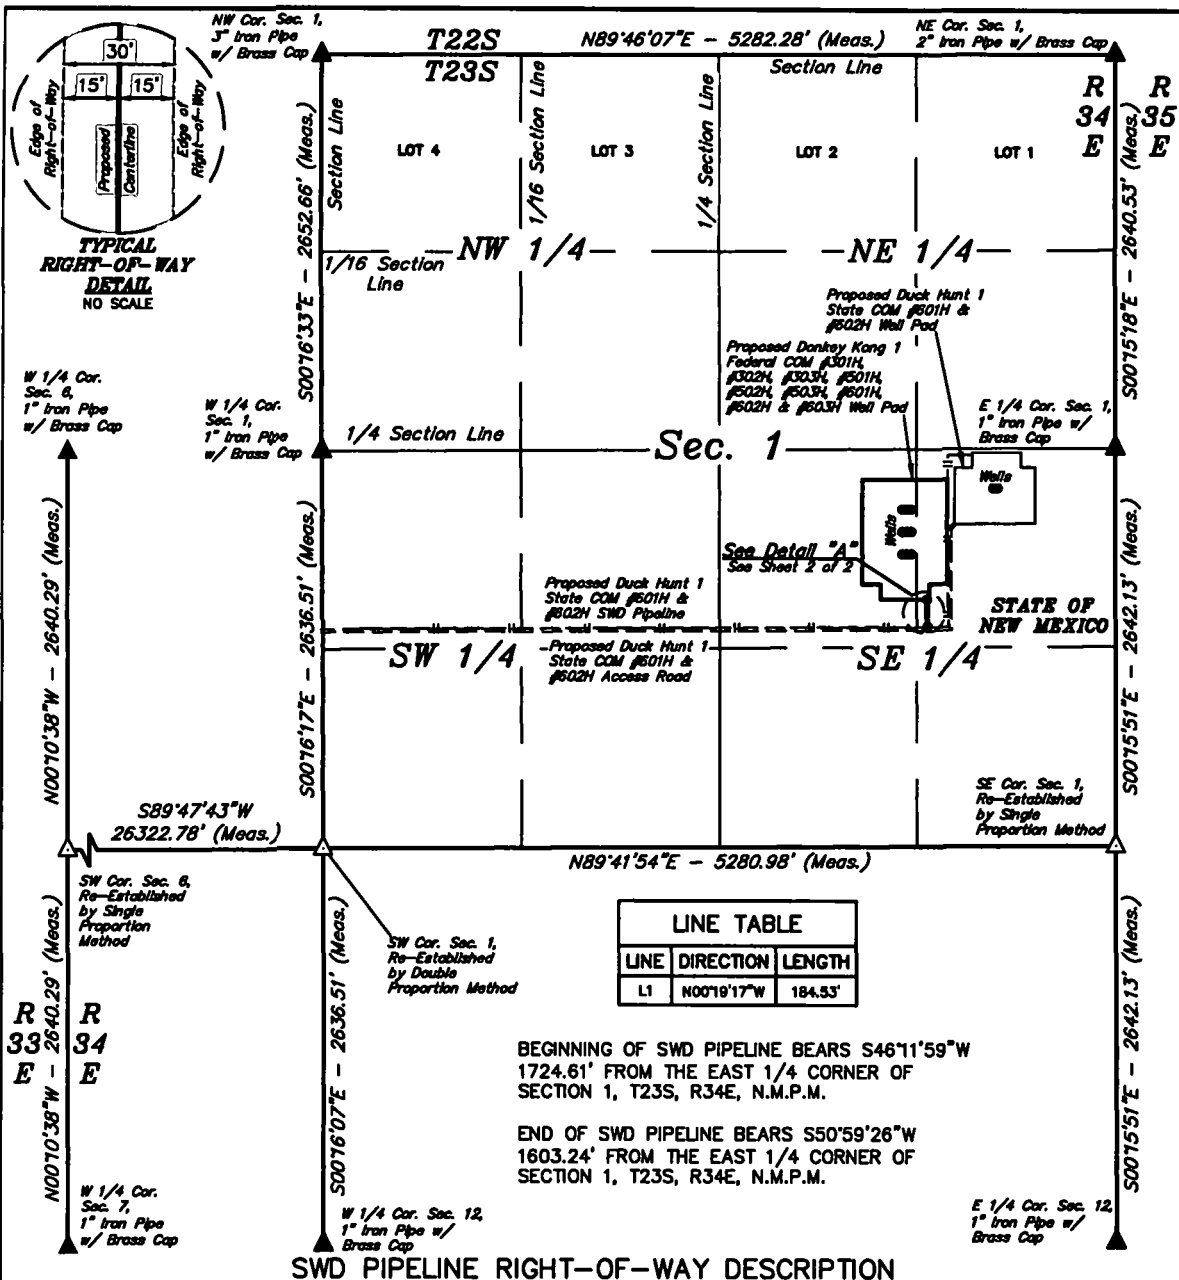

A 30' WIDE RIGHT-OF-WAY 15' ON EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE.

BEGINNING AT A POINT IN THE NE 1/4 SE 1/4 OF SECTION 1, T23S, R34E, N.M.P.M., WHICH BEARS S46°11'59"W 1724.61' FROM THE EAST 1/4 CORNER OF SAID SECTION 1, THENCE N00°19'17"W 184.53' TO A POINT IN THE NE 1/4 SE 1/4 OF SAID SECTION 1, WHICH BEARS S50°59'26"W 1603.24' FROM THE EAST 1/4 CORNER OF SAID SECTION 1. THE SIDE LINES OF SAID DESCRIBED RIGHT-OF-WAY BEING SHORTENED OR ELONGATED TO MEET THE GRANTOR'S PROPERTY LINES. BASIS OF BEARINGS IS A TRANSVERSE MERCATOR PROJECTION WITH A CENTRAL MERIDIAN OF W103°53'00". CONTAINS 0.127 ACRES MORE OR LESS.



ACREAGE / LENGTH TABLE

	OWNERSHIP	FEET	RODS	ACRES
SEC. 1 (NE 1/4 SE 1/4)	STATE OF NEW MEXICO	184.53	11.18	0.127

- ▲ = SECTION CORNERS LOCATED.
△ = SECTION CORNERS RE-ESTABLISHED.
(Not Set on Ground.)

FILE: 64155-A

Sheet 1 of 2

NOTES:
* Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

CENTENNIAL RESOURCE PRODUCTION, LLC

DONKEY KONG 1 FED COM #301H, #302H, #303H, #501H, #502H, #503H, #601H, #602H & #603H
ON STATE OF NEW MEXICO LANDS IN
SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO


SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	05-31-18	1" = 1000'


SWD PIPELINE R-O-W




UELS, LLC
Corporate Office • 85 South 200 East
Vernal, UT 84078 • (435) 789-1017

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY OF THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT THE SAME IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



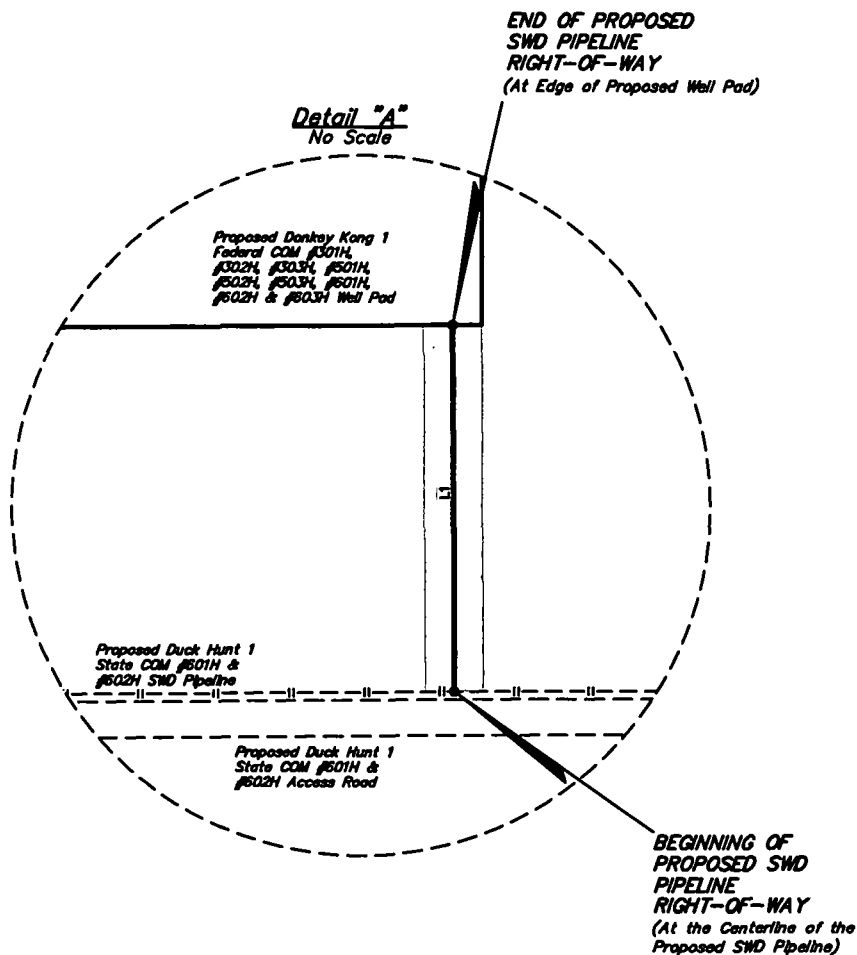

CERTIFICATE
THIS IS TO CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION, THAT I AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO, AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



FILE: 64155-B

Sheet 2 of 2

NOTES:

* Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

CENTENNIAL RESOURCE PRODUCTION, LLC

**DONKEY KONG 1 FED COM #301H, #302H, #303H, #501H,
#502H, #503H, #601H, #602H & #603H
ON STATE OF NEW MEXICO LANDS IN
SECTION 1, T23S, R34E, N.M.P.M.
LEA COUNTY, NEW MEXICO**

SURVEYED BY	B.B., R.C.	05-25-18	SCALE
DRAWN BY	C.D.	05-31-18	N/A

S.W.D. PIPELINE R-O-W



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017