

NEW MEXICO OIL CONSERVATION COMMISSION

NOTICE OF INTENTION TO DRILL **Elev. 5546' DF**

See Rules 101 and 1104.

If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval.

Astec, New Mexico

Place

June 13, 1952

Notice hereby is given that it is our intention to commence the drilling of a well to be known as.....

Douglas Kenaston
Company or Operator**Bergin Pooled Unit**well No. **1**

in

of Sec. **21**, T. **29 N**, R. **11 W.**, N. M. P. M. **Pulcher-** Pool, **San Juan** County.

N

The well is **1650** feet from (N.) **1850** feet from

(E.) (W.) line of the above section.

(Give location from section lines. Cross out wrong directions.)

If state land the oil and gas lease is No. Assignment No.

If patented land the owner is **John C. Bergin, Bloomfield, New Mexico**Address **pooled with the Estate of Ralph Bergin deceased, and Rudy Ferrari, Bloomfield, New Mexico**~~Address: Ralph Bergin Estate 20 acres (E. 1/4, S. 1/4, & S. 1/4)~~The lessee is **Rudy Ferrari (40 acres), Astec,****W. R. Mints**Address **Box 471, Astec, New Mexico**

We propose to drill well with drilling equipment as follows:.....

Rotary

The status of a bond for this well in conformance with Rule 101 of the General Rules and Regulations of the Commission is as follows: **\$10,000 Blanket Bond deposited on file with the Commission.**

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
9 7/8	8 5/8	30	Second hand	140'	Cemented	112
7 7/8	5	14	" "	2000'	"	200 sx

If changes in the above plans become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about **2000** feet.

Additional information: **We propose to drill a well to and through the Pictures Cliffs sand, estimated depth 2,000'. A minimum of 100' of 8-5/8" casing will be cemented to the surface, approximately 2000' of 5" casing cemented with approximately 200 sx; drill the sand, and if conditions warrant, approximately 80 to 90' of section will be shot with approximately 3 qts. to the foot of SNG, clean out, run 1 1/2" syphon line to the bottom and complete as gas well.**

Approved..... 19.....

except as follows:

Douglas Kenaston

Company or Operator

By **W. R. Mints**Position **Manager**

Send communications regarding well to:

Name **W. R. Mints**Address **Astec, New Mexico**

OIL CONSERVATION COMMISSION,

By


Title

52/64/12

Location 1650' from the North line and 1830' from
the West line.

San Juan County

New Mexico

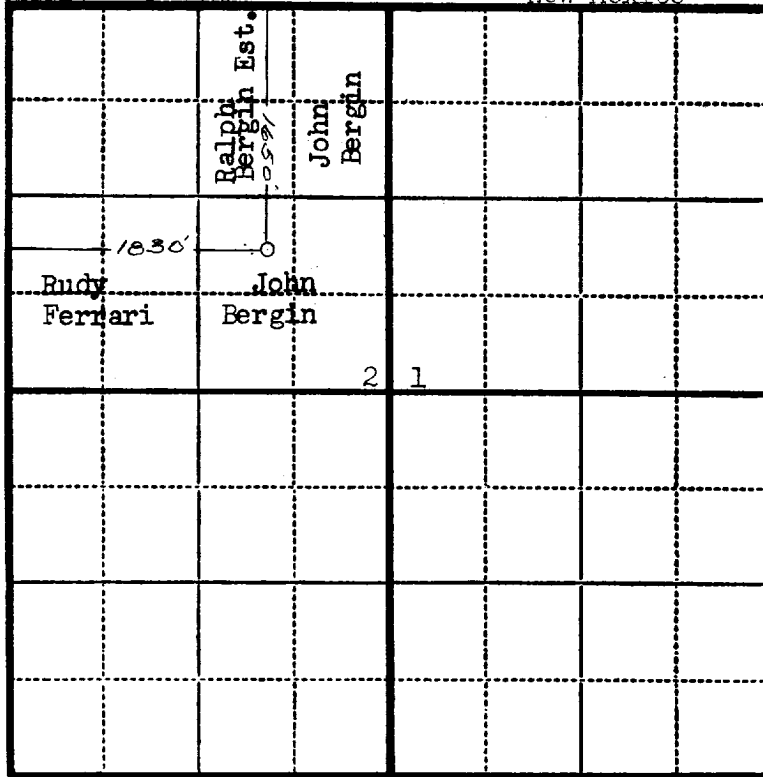

Scale—4 inches equals 1 mile.

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Seal:

Registered Professional
Engineer and Land Surveyor.

Charles J. Finklea
N. Mex. Reg. No. 1302

Surveyed May 13, 1952

OK RS