

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Budget Bureau No. 42-R358.4.
Form Approved.

Land Office **Santa Fe**

Lease No. **080655**

Unit **W/2**

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	X
NOTICE OF INTENTION TO CHANGE PLANS.....	XXXXXX	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 9, 1963.

J. Glenn Turner - Herrin

Well No. **1-13** is located **1,550** ft. from **N** line and **790** ft. from **E** line of sec. **13**

SW/4 Section 13
(1/4 Sec. and Sec. No.)

T 29-N R 10-W

N.M.P.M.

Basin Dakota Field
(Field)

San Juan County
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is **5,865** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Receipt is acknowledged of letter from Emery C. Arnold, Supervisor, District No. 3, New Mexico Oil Conservation Commission dated September 4, 1963, and requirements stated therein with reference to cementing off the Pictured Cliffs and Mesa Verde formations through stage collars, regardless of interpretation of electric log as to presence of commercial production will be complied with.

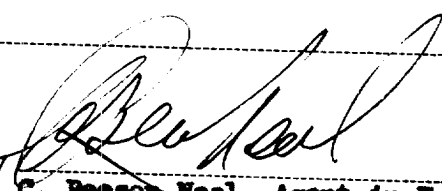
September 5, 1963 - Spudded well at 10:30 A.M.

September 6, 1963 - after drilling to 318.40 feet, set 8-5/8" casing on bottom and cemented with 250 sacks neat cement, 2% CaCl₂. Circulated to surface. After cementing had set, tested casing by pressuring up, and continued drilling with rotary rig.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **J. Glenn Turner**

Address **P. O. Box 722 728**
Farmington, New Mexico.

By 
C. Beeson Neal, Agent in Farmington
Title _____