

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd. Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

RECEIVED
CONSERVATION DIVISION

DEC 27 2010
HOBBS
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-32533 ✓
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/> ✓
6. State Oil & Gas Lease NO. B-1656
7. Lease Name or Unit Agreement Name State "J" Gas Com ✓
8. Well Number 6 ✓
9. OGRID Numer 873 ✓
10. Pool Name Eumont Yates / 7RQ
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3600' GL

SUNDRY NOTICES AND REPORTS ON WELLS
(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> ✓
2. Name of Operator Apache Corporation ✓
3. Address of Operator 303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705
4. Well Location Unit Letter M : 990' feet from the S line and 990' feet from the W line ✓ Section 2 Township 20S Range 36E NMPM County LEA
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3600' GL

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	
OTHER: <input type="checkbox"/>	

SUBSEQUENT REPORT OF:

REMEDIAL WORK <input type="checkbox"/>
COMMENCE DRILLING OPNS. <input type="checkbox"/>
CASING/CEMENT JOB <input type="checkbox"/>
ALTERING CASING <input type="checkbox"/>
P AND A <input type="checkbox"/>
OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes the P&A the above mentioned well by the attached procedure.

The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Guinn Burks* TITLE Reclamation Foreman DATE 12/22/10

Type or print name Guinn Burks E-mail add. guinn.burks@apachecorp.com PHONE: 432-556-9143

For State Use Only

APPROVED BY: *Larry W. Hip* TITLE DISTRICT 1 SUPERVISOR DATE DEC 28 2010

Conditions of Approval (if any):



LEASE NAME

State "J" Gas Com

WELL #

#6

API#

30-025-32533

COUNTY

Lea


WELL BORE INFO.

8 5/8", 24# @ 416'
w/ 150 sx cmt to surface

CIBP @ 3300' w/ 35' cmt
TOC on CIBP @ 3265'

Perfs @ 3376' - 3564"

5 1/2", 15.5# @ 3596'
w/ 950 sx cmt CIRC to surface
TD 3596'

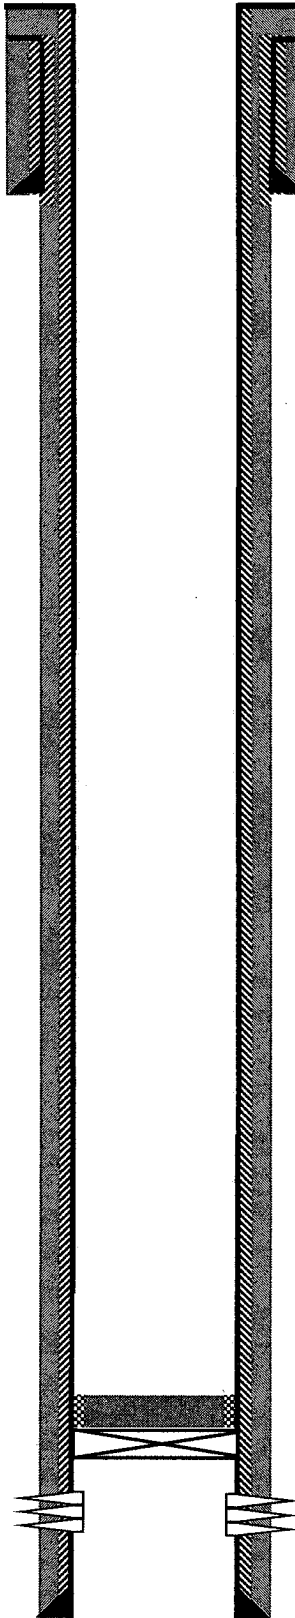



LEASE NAME

State "J" Gas Com

WELL #

#6

API#

30-025-32533

COUNTY

Lea

WELL BORE INFO.


8 5/8", 24# @ 416'
w/ 150 sx cmt to surface

CIBP @ 3300' w/ 35' cmt
TOC on CIBP @ 3265'

Perfs @ 3376' - 3564"

5 1/2", 15.5# @ 3596'
w/ 950 sx cmt CIRC to surface
TD 3596'

PROPOSED PROCEDURE

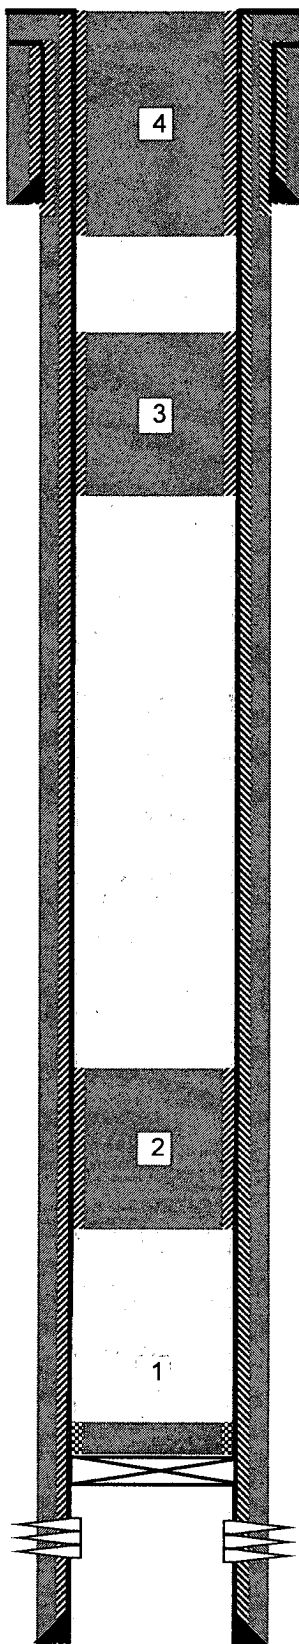

4. PUH, spot 50 sx Class "C" cmt from 466' to surface (Shoe)

3. PUH, spot 25 sx Class "C" cmt from 1260' - 1019' WOC/TAG (Top of Salt)

2. PUH, spot 25 sx Class "C" cmt from 2393' - 2152' (Top of Yates)

1. MIRU, RIH w/ tbg & CIRC w/ MLF