

Office

June 19, 2008

District I

State of New Mexico
Energy, Minerals and Natural Resources

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd. Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

RECEIVED OIL CONSERVATION DIVISION

MAR 07 2011

HOBBSOCD

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-04068

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease NO.

7. Lease Name or Unit Agreement Name

North Monument G/SA Unit

8. Well Number

4

9. OGRID Numer

873

10. Pool Name

Eunice Monument G/SA

SUNDRY NOTICES AND REPORTS ON WELLS

(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator

Apache Corporation

3. Address of Operator

303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705

4. Well Location

Unit Letter **D** : **663'** feet from the **N** line and **661'** feet from the **W** line
Section **25** Township **19S** Range **36E** NMPM County **Lea**11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3668' DF

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐TEMPORARILY ABANDON ☐PULL OR ALTER CASING ☐DOWNHOLE COMMINGLE ☐PLUG AND ABANDON ☒CHANGE PLANS ☐MULTIPLE COMPL ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐COMMENCE DRILLING OPNS. ☐CASING/CEMENT JOB ☐ALTERING CASING ☐P AND A ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Guinn Burks

TITLE

Reclamation Foreman

DATE

3/3/11

Type or print name

Guinn Burks

E-mail add.

guinn.burks@apachecorp.com

PHONE:

432-556-9143

For State Use Only

APPROVED BY:

E. Gonzalez

TITLE

STAFF MGR

DATE

3-9-2011

Conditions of Approval (if any):



LEASE NAME
WELL #
API #
COUNTY

NMGSAU

4

30-025-04068

Lea

WELL BORE INFO.


13 3/8" csg set @ 159'
w/ 200 sx cmt CICR to surface

8 5/8" csg set @ 1251'
w/ 700 sx cmt CIRC to surface

TOC Unknown

CIBP @ 3750' w/ no cmt
5 1/2" set @ 3835'
w/ 400 sx cmt TOC

Open Hole 3835' - 3980'

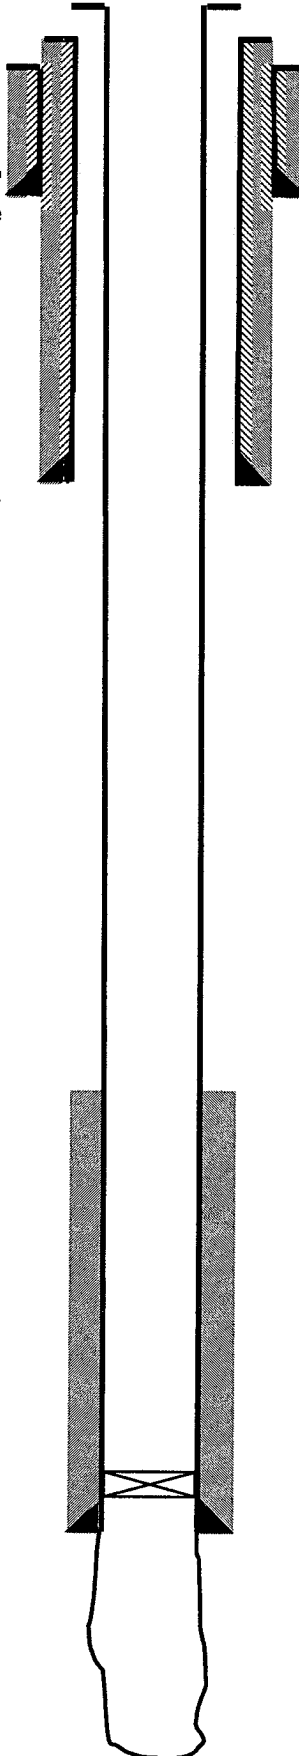



WELL BORE INFO.

LEASE NAME

NMGSAU

WELL #

4

API #

30-025-04068

COUNTY

Lea

Proposed Procedure

13 3/8" csg set @ 159'
w/ 200 sx cmt CIRC to surface

8 5/8" csg set @ 1251'
w/ 700 sx cmt CIRC to surface

TOC Unknown

CIBP @ 3750' w/ no cmt
5 1/2" set @ 3835'
w/ 400 sx cmt TOC

Open Hole 3835' - 3980'

4. PUH & perf @ 209' & sqz 100 sx Class "C" cmt from 209' - Surface, attempt to sqz all strings (Surface shoe & WB)

3. PUH, & perf @ 1355' & sqz 75 sx Class "C" cmt from 1355' - 1151' WOC/TAG (Shoe & Top of Salt)

2. PUH & perf @ 2460' & sqz 50 sx Class "C" cmt from 2460' - 2360' WOC/TAG (Base of Salt)

1. MIRU, RIH w/ 2 3/8" WS & verify CIBP @ 3750', CIRC w/ MLF, and spot 25 sx Class "C" cmt on top of CIBP