

Submit 1 Copy To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 3002503091
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name CENTRAL VACUUM UNIT
8. Well Number 103
9. OGRID Number 4323
10. Pool name or Wildcat GRAYBURG/SAN ANDRES

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
CHEVRON USA INC.

3. Address of Operator
15 SMITH ROAD, MIDLAND, TEXAS 79705

4. Well Location

Unit Letter G: 1980 feet from the NORTH line and 1980 Feet from the EAST Line

Section

Township

Range

NMPM

County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3961' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☒ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

WRITE AND REVIEW JSA'S - UPDATE AS JOB SCOPE CHANGES. MIRU PU. BLEED TBG. POOH WITH RODS AND LD PUMP AND K-BARS AND ANY BAD RODS AS NEEDED. CIR W/BW (IF POSSIBLE). NDWH. NUBOP. POOH W/TBG WHILE SCANNING TBG. AND LD BHA. PU BIT. BIT SUB. BAILER AND REST OF BIHA RIH W/TBG AND TAG FILL. C/O TO PB@ 4796'. POOH W/TBG AND LD BHA. PU 3 1/2" X 20' NON SLOTTED AND BULL PLUGGED MUD ANCHOR (PCID&OD), 2 7/8" X 4' PCID&OD LIFT SUB, 2 7/8" X 24' BULL PLUGGED SAND SCREEN, 2 7/8" STAINLESS STEEL MECH SEAT NIPPLE WITH 36' X 1 1/4" MULE SHOED DIP TUBE ATTACHED, 1-2 7/8" ENDUROJOINT, RIH W/REST OF 2 7/8" TBG. TO FHD OF 4750'. NDBOP. SET TAC. NUWH. DROP 5 GALLONS CRO-396 DOWN TBG. PU (25-200-RHBM-24-5) PUMP AND K-BARS RIH W/RODS. SPACE OUT AND HANG ON. LOAD AND TEST. RD CLEAN LOCATION MO.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Carlos Valenzuela TITLE: Artificial Lift Corrosion Representative DATE: March 14, 2011

Type or print name Carlos Valenzuela E-mail address: cvalenzuela@chevron.com PHONE: 575-390-9615


For State Use Only

APPROVED BY: [Signature] TITLE STATE MGR DATE 3-17-2011
Conditions of Approval (if any):

Chevron U.S.A. Inc. Wellbore Diagram : CVU 103



[Lease] OVC VACUUM [Well No.] CVU 103 VGSA 103 [Field] FLD-VACUUM
 [Location] 1980FNL1980FEL [Sec.] N/A [Blk] _____ [Survey] N/A
 [County] Lea [St.] New Mexico [Refno] FA4243 [API] 3002503091 [Cost Center] BCT494500
 [Section] 6 [Township] 018 S [Range] 035 E
 [Current Status] ACTIVE [Dead Man Anchors Test Date] NONE
 [Directions] _____

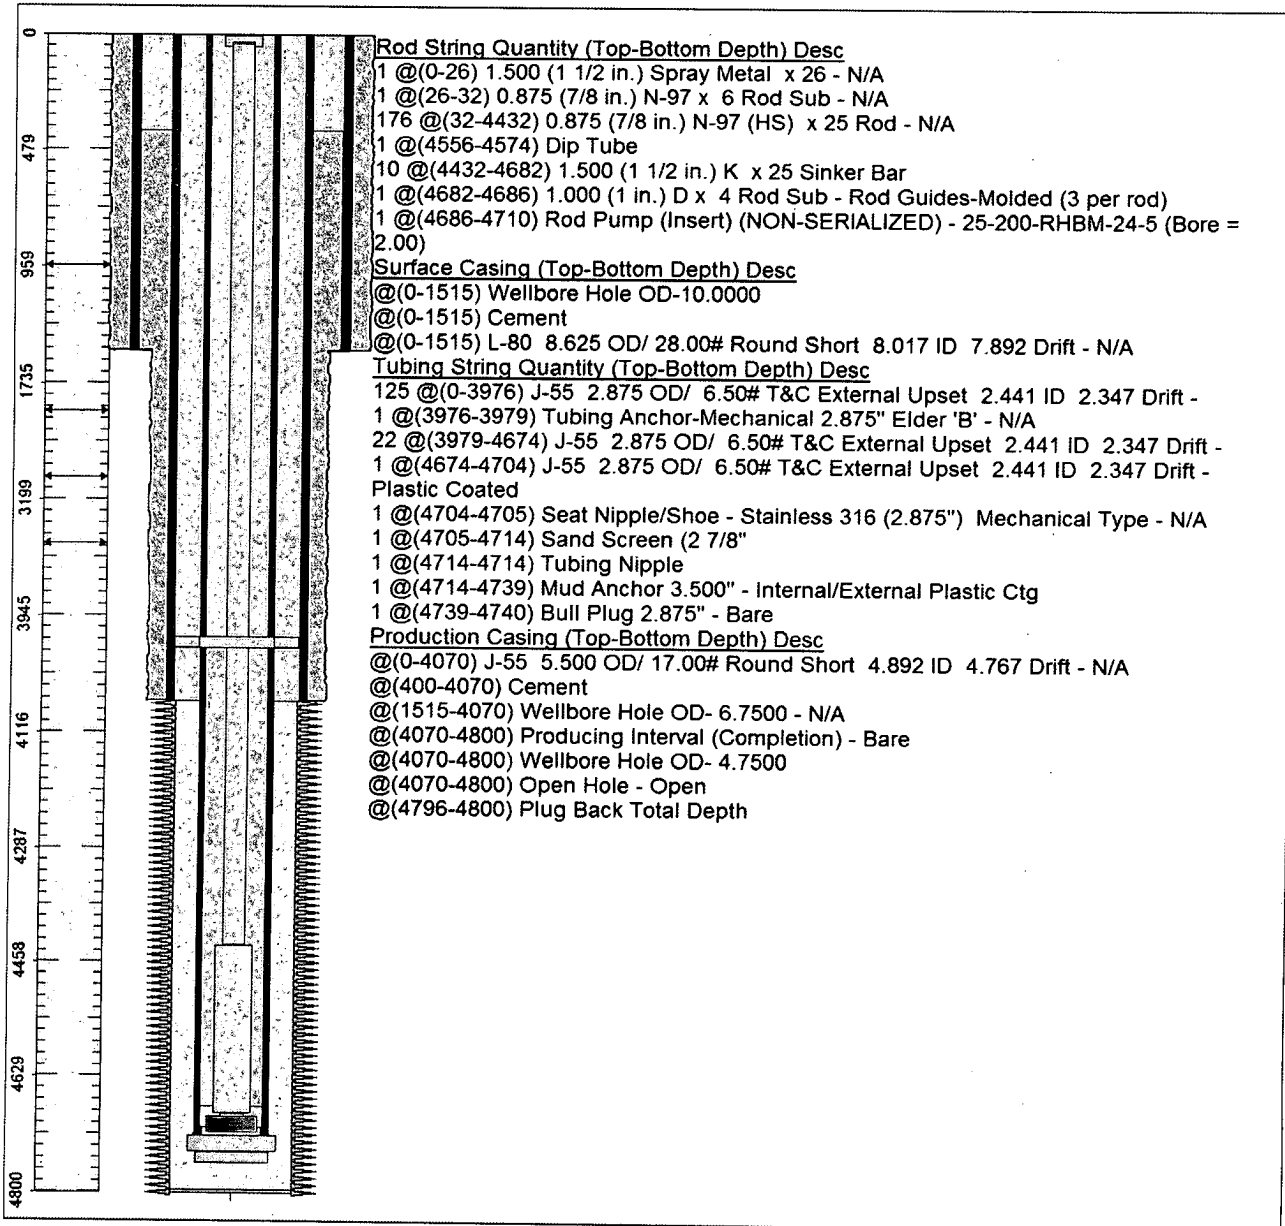

[Ground Elevation (MSL):] 0.00 [Spud Date] 10/09/1970 [Compl. Date] 11/05/1970
 [Well Depth Datum:] CSI0000N [Elevation (MSL):] 0.00 [Correction Factor] 0.00
 [Last Updated by] valenca [Date] 03/15/2011
 [null] null [null] null