
Submit 3 Copies To Appropriate District	01-1f.N	Mauiee			Form C-103 June 19, 2008	
Office District I	State of New Mexico Energy, Minerals and Natural Resources			WELL API NO.		
1625 N. French Dr., Hobbs, NM 88240	French Dr., Hobbs, NM 88240			30-025-06447		
District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Ave., Artesia, NM 88210			5. Indicate	5. Indicate Type of Lease		
District III APR 1 5 2011				STATE	FEE 🗹 🦯	
1000 1 110 1510 150 150 150 150 150 150			6. State O	il & Gas Lease N	0.	
District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505						
SUNDRY NOTICES AND REPORTS ON WELLS 7. Lease Name or Unit Agreement Name						
(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH				Northeast Drinkard Unit (NEDU)		
PROPOSALS.)				8. Well Number		
1. Type of Well: Oil Well Gas Well Other				9. OGRID Numer		
2. Name of Operator Apache Corporation				873		
3. Address of Operator 303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705				10. Pool Name Eunice,Bli-Tu-Dr,north(22900)		
4. Well Location	e, Ste. 3000, Mildialia, i	X 79705	Luii	ice,bii-i u-bi,iii	SITTI(22300)	
Unit Letter A :	660 feet from the	N line and Range 37E	525 - NMDM		E line v LEA	
Section 10 11.	Township 21S Elevation (Show whether D			County		
	34	90' GR		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
12. Check Ap	propriate Box To Indicat	e Nature of Notice,	Report, or Oth	her Data		
NOTICE OF INTE	ENITION TO:		SURSEO	UENT REPORT	r OF·	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL						
TEMPORARILY ABANDON	CHANGE PLANS	СОММІ	ENCE DRILLIN	=		
PULL OR ALTER CASING DOWNHOLE COMMINGLE	MULTIPLE COMPL		G/CEMENT JOI ING CASING			
DOWNINGEE COMMINGEE		P AND				
OTHER:	rations (Classic state all p	OTHER		otos including os	timated data of	
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.						
Apache Corporation proposes to P&A the above mentioned well by the attached procedure.						
	e e e e e e e e e e e e e e e e e e e					
The Oil Conservation Division Must be notified						
24 hours prior to the beginning of plugging operations.						
Spud Date:		Rig Release Date:				
I hereby certify that the information above is true a	nd complete to the best of my	knowledge and belief.				
CIONATURE	har latitle	Reclamation	Earaman	DATE	4/12/11	
SIGNATURE Same	Mura IIILE	Recialitation	Foreman		4/12/11	
Type or print name Guinn E	E-mail add.	guinn.burks@apa	checorp.com	PHONE:4	32-556-9143	
For State Use Only		Em Ll 100	0 >	DATE 4	19-2-11	
APPROVED BY: Conditions of Approval (if any):	The IILE	JHTP INE	72	DATE	-11-1011	

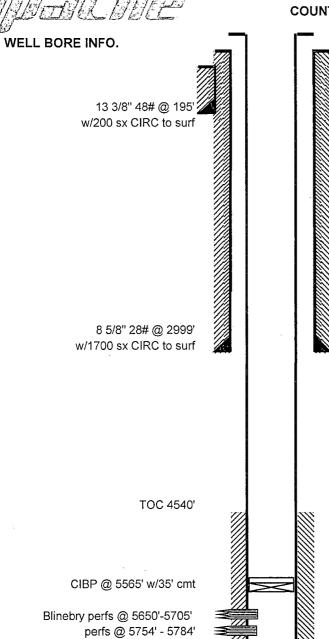

perfs @ 5871'-5878' Sqzd w/ 200 sx cmt

CICR @ 5928' w/2 sx

CIBP @ 6450 w/ 2 sx cmt

Drinkard perfs @ 6530' - 6696'

Model "D" pkr @ 6510'

5 1/2" 15.5# @ 7462' w/500 sx cmt

PBTD 5530' TD 7463'

w/90 sx cmt

Blinebry Sqd perfs @ 6033' - 6140'



 LEASE NAME
 NEDU

 WELL #
 409


 API#
 30-025-06447

 COUNTY
 Lea

WELL BORE INFO.

PROPOSED PROCEDURE

13 3/8" 48# @ 195' w/200 sx CIRC to surf



5. PUH & perf @ 1290' & sqz 50 sx Class "C" cmt from 1290' - 1190' (Top of Salt) U & C ~ TA 9

4. PUH & perf @ 2490' & sqz 50 sx Class "C" cmt from 2490' - 2390' (Base of Salt)

PUH & perf @ 3050' & sqz 50 sx Class "C" cmt from 3050' to 2950' WOC/TAG (Shoe)

8 5/8" 28# @ 2999' w/1700 sx CIRC to surf

TOC 4540'

CIBP @ 5565' w/35' cmt

Blinebry perfs @ 5650'-5705' perfs @ 5754' - 5784' perfs @ 5871'-5878' Sqzd w/ 200 sx cmt

CICR @ 5928' w/2 sx Blinebry Sqd perfs @ 6033' - 6140' w/90 sx cmt


CIBP @ 6450 w/ 2 sx cmt

Model "D" pkr @ 6510'

Drinkard perfs @ 6530' - 6696'

5 1/2" 15.5# @ 7462' w/500 sx cmt

PBTD 5530' TD 7463'



1. MIRU, RIH w/tbg & verify CIBP @ 5530' & CIRC w/