

RECEIVED CONSERVATION DIVISION

APR 25 2011

HOBBSUCD

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-04104

5. Indicate Type of Lease

STATE ☐FEE ☒

6. State Oil & Gas Lease NO.

7. Lease Name or Unit Agreement Name

North Monument G/SA Unit: Blk 13

8. Well Number

17

9. OGRID Numer

873

10. Pool Name

Eunice Monument; G/SA

SUNDRY NOTICES AND REPORTS ON WELLS

(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

Apache Corporation

3. Address of Operator

303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705

4. Well Location

Unit Letter H : 1980 feet from the N line and 660 feet from the E line
Section 34 Township 19S Range 36E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3642' GR

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐CHANGE PLANS ☐PULL OR ALTER CASING ☐MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐COMMENCE DRILLING OPNS. ☐CASING/CEMENT JOB ☐ALTERING CASING ☐P AND A ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.Spud Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Guinn Burks

TITLE

Reclamation Foreman

DATE

4/21/11

Type or print name

Guinn Burks

E-mail add.

guinn.burks@apachecorp.com

PHONE:

432-556-9143

For State Use Only

APPROVED BY:

Guinn Burks

TITLE

STAFF MGR

DATE

4-26-2011

Conditions of Approval (if any):



WELL BORE INFO.

LEASE NAME	North Monument G/SA Unit: Blk 13
WELL #	17
API #	30-025-04104
COUNTY	Lea

10-3/4" 32# @ 258' w/ 200 sx
13-3/4" hole, Calc TOC to surf

7-5/8" 24# @ 1281' w/ 300 sx
9-7/8" hole, Calc TOC to surf

CIBP @ 3800', 2 sx cmt.
5-1/2" 17# @ 3800' w/ 300 sx
6-3/4" hole, TOC unknown
Perfs @ 3870-3926'
4-1/2" 10.23# Lnr. From 3673'
to 3890' w/ 25 sx cmt.

OH 3800'-3890'
4-3/4" hole

PBTD @ 3745'
TD @ 3970



WELL BORE INFO.

LEASE NAME	North Monument G/SA Unit: Blk 13
WELL #	17
API #	30-025-04104
COUNTY	Lea


PROPOSED PROCEDURE

10-3/4" 32# @ 258' w/ 200 sx
13-3/4" hole, Calc TOC to surf

7-5/8" 24# @ 1281' w/ 300 sx
9-7/8" hole, Calc TOC to surf

CIBP @ 3800', 2 sx cmt.
5-1/2" 17# @ 3800' w/ 300 sx
6-3/4" hole, TOC unknown
Perfs @ 3870-3926'
4-1/2" 10.23# Lnr. From 3673'
to 3890' w/ 25 sx cmt.

OH 3800'-3890'
4-3/4" hole

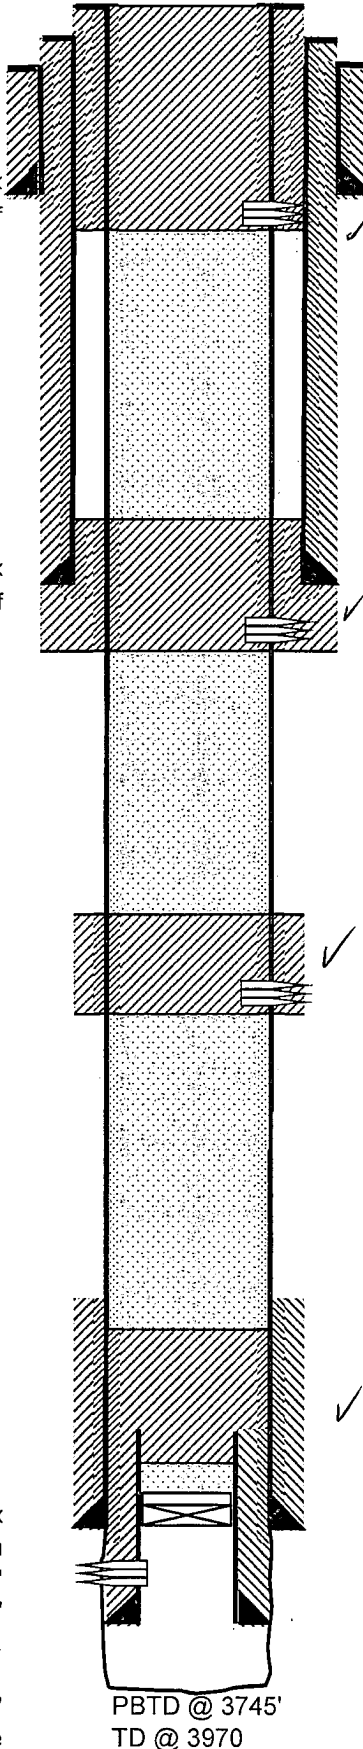

5. PUH & perf @ 308' & sqz 130 sx Class "C" cmt from 308' to surf, CIRC all strings to surf (Shoe & Water Board)

4. PUH & perf @ 1350' & sqz 60 sx Class "C" cmt from 1350'-1231' WOC/TAG (Shoe & Top of Salt)

3. PUH & perf @ 2450' & sqz 50 sx Class "C" cmt from 2450'-2350' WOC/TAG (Base of Salt)

2. PUH & spot 40 sx Class "C" cmt from 3723'- 3350' WOC/TAG (Top of Liner & Queen)

1. MIRU & verify CIBP @ 3800' & CIRC w/MLF.