

Office
 District I
 1625 N. French Dr., Hobbs, NM 88240
 District II
 1301 W. Grand Ave., Artesia, NM 88210
 District III
 1000 Rio Brazos Rd. Aztec, NM 87410
 District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals and Natural Resources

RECEIVED**OIL CONSERVATION DIVISION**

APR 25 2011

HOBBSOCD1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-05870
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease NO.
7. Lease Name or Unit Agreement Name North Monument G/SA Unit: Blk 23
8. Well Number 2
9. OGRID Numer 873
10. Pool Name Eunice Monument; G/SA

SUNDRY NOTICES AND REPORTS ON WELLS
 (DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

Apache Corporation

3. Address of Operator

303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705

4. Well Location

Unit Letter	B	:	330	feet from the	N	line and	1648	feet from th	E	line
Section	3	:	Township	20S	Range	37E	NMPM	County	Lea	

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3550' GR

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:PERFORM REMEDIAL WORK ☐TEMPORARILY ABANDON ☐PULL OR ALTER CASING ☐DOWNHOLE COMMINGLE ☐PLUG AND ABANDON ☒CHANGE PLANS ☐MULTIPLE COMPL ☐OTHER: ☐**SUBSEQUENT REPORT OF:**REMEDIAL WORK ☐COMMENCE DRILLING OPNS. ☐CASING/CEMENT JOB ☐ALTERING CASING ☐P AND A ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
 24 hours prior to the beginning of plugging operations.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Guinn Burks

TITLE

Reclamation Foreman

DATE

4/21/11

Type or print name

Guinn Burks

E-mail add.

guinn.burks@apachecorp.com

PHONE:

432-556-9143**For State Use Only**

APPROVED BY:

[Signature]

TITLE

STAFF MGR

DATE

4-26-2011

Conditions of Approval (if any):



WELL BORE INFO.

LEASE NAME

North Monument G/SA Unit: Blk 23

WELL #

2

API #

30-025-05870

COUNTY

Lea

8-5/8" 24# @ 326' w/ 200 sx to surf.
11" hole

Csg leak @ 420'-452' (no cmt behind 5 1/2")
sqzd w/175 sx & circ to surf


Calc TOC @ 1940'

CIBP @ 3670' (10/95)

Perfs @ 3696'-3769'

Perfs @ 3798'-3846'

5-1/2" 14@ @ 3904 w/ 300 sx
7-7/8" hole, TOC unknown

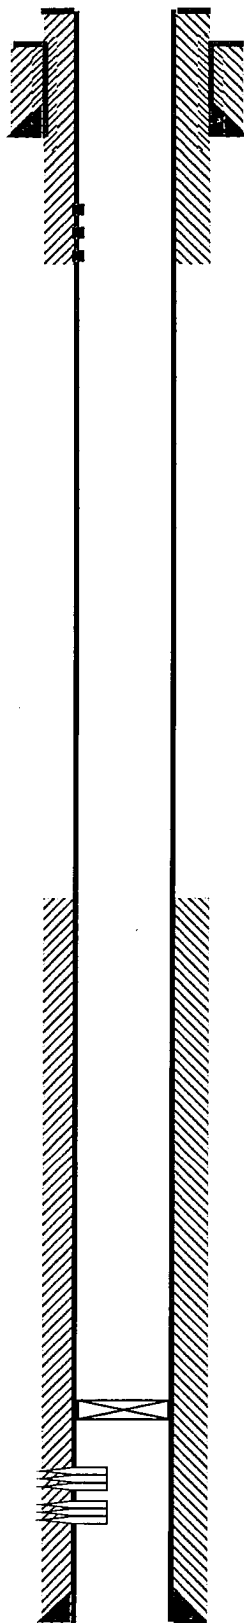

PBTD @ 3670'

TD @ 3904'



WELL BORE INFO.

8-5/8" 24# @ 326' w/ 200 sx to surf.
11" hole

Csg leak @ 420'-452' (no cmt behind 5 1/2")
sqzd w/175 sx & circ to surf (1995)

Calc TOC @ 1940'

CIBP @ 3670' (10/95)

Perfs @ 3696'-3769'
Perfs @ 3798'-3846'

5-1/2" 14# @ 3904 w/ 300 sx
7-7/8" hole, TOC unknown

PBTD @ 3670'
TD @ 3904'

LEASE NAME

North Monument G/SA Unit: Blk 23

WELL #

2


API #

30-025-05870

COUNTY

Lea

PROPOSED PROCEDURE

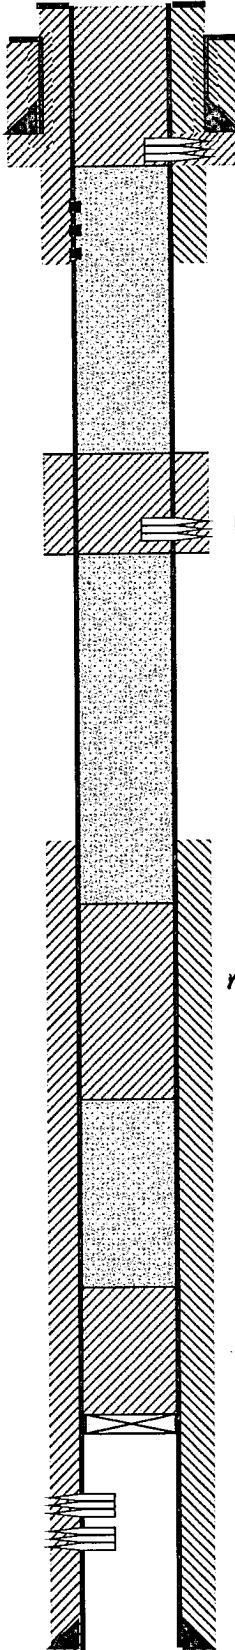

4.. PUH & perf @ 376' & attempt to sqz 110 sx Class "C" cmt from 376'-to surf, try to circ 5 1/2" to surf (may not sqz due to 175 sx sqz done in 1995) If doesn't sqz spot cmt to surf. (Shoe & Water Board)

3. PUH & perf @ 1465' & sqz 50 sx Class "C" cmt from 1465'-1365' WOC/TAG (Top of Salt)

2. PUH to 2450' & spot 50 sx Class "C" cmt from 2912'-2430' WOC/TAG (7 Rvrs, Yates & Base of Salt)

1. MIRU, RIH w/ tbg & circ w/MLF & spot 25 sx Class "C" cmt from 3670'-3420' WOC/TAG (CIBP & Queen)