

District I
1625 N. French Dr., Hobbs, NM 88240

District II
1301 W. Grand Ave., Artesia, NM 88210

District III
1000 Rio Brazos Rd. Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
HOBBS OGD
MAY 10 2011
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-04122
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Apache Corporation		6. State Oil & Gas Lease NO.
3. Address of Operator 303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705		7. Lease Name or Unit Agreement Name North Monument Grayburg/SA Unit Blk. 13
4. Well Location Unit Letter D : 660 feet from the N line and 660 feet from the W line Section 35 Township 19S Range 36E NMPM County Lea		8. Well Number 4
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3641' GR		9. OGRID Numer 873
		10. Pool Name Eunice Monument G/SA

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐
ALTERING CASING ☐
P AND A ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Guinn Burks TITLE Reclamation Foreman DATE 5/5/11

Type or print name Guinn Burks E-mail add. guinn.burks@apachecorp.com PHONE: 432-556-9143

For State Use Only

APPROVED BY: [Signature] TITLE State Engineer DATE 5-10-2011

Conditions of Approval (if any):

MAY 11 2011



WELL BORE INFO.

LEASE NAME

NMGSAU Bk. 13

WELL #

4

API #

30-025-04122

COUNTY

Lea


12 1/2" 40# @ 191'
w/ 200 sx to surf

8 5/8" 32# @ 2539'
w/ 600 sx to surf
(1955) tie back 6 5/8" to surf @ 2487'

(1994) perfed 4 holes @ 2680'
Sqzd w/ 375 sx TOC ?

TOC @ 3080'

CIBP @ 3748' w/ 14' cmt
6 5/8" 20# @ 3845'
w/ 100 sx TOC @ 3080'

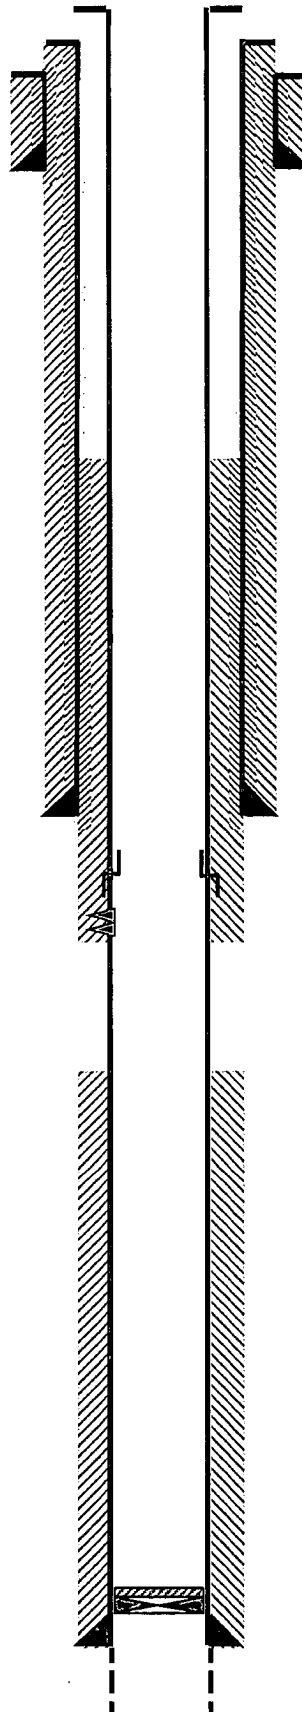

PBTD @ 3734'
TD @ 3960'



WELL BORE INFO.

LEASE NAME

NMGSAU Bk. 13

WELL #

4

API #

30-025-04122

COUNTY

Lea

PROPOSED PROCEDURE

12 1/2" 40# @ 191'
w/ 200 sx to surf

4. PUH & perf @ 241' & sqz 70 sx Class "C" cmt from 241' to surf circ 6 5/8" csg to surf, sqz all strings (Shoe & Water Board)

3. PUH & perf @ 1360' & sqz 50 sx Class "C" cmt from 1360'-1260' WOC/TAG (Top of Salt)

8 5/8" 32# @ 2539'
w/ 600 sx to surf
(1955) tie back 6 5/8" to surf @ 2487'

2. PUH to 2730' & spot 55 sx Class "C" cmt from 2730'-2404' WOC/TAG (Sqz holes, Tie Back, Shoe & Base of Salt)

(1994) perfed 4 holes @ 2680'
Sqzd w/ 375 sx TOC ?

TOC @ 3080'

1. MIRU & RIH w/ tbg & verify CIBP. Circ w/MLF & spot 25 sx Class "C" cmt from 3734'-3484' (Min 100' Or 25 sx)

CIBP @ 3748' w/ 14' cmt
6 5/8" 20# @ 3845'
w/ 100 sx TOC @ 3080'

PBTD @ 3734'
TD @ 3960'