

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87401
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

HOBBS OCD
MAY 10 2011
RECEIVED

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-05607
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B-243
7. Lease Name or Unit Agreement Name: East Eumont Unit
8. Well Number 37
9. OGRID Number 192463
10. Pool name or Wildcat Eumont Yates 7Rvr On

11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3690'

Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUPSEQUENT REPORT OF:

- REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE L ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent address of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or recompletion.

TD-3950' Perfs-3765-3931'
8-5/8" 24# csg @ 307' w/225sx, 12-1/4" hole, TOC-Surf-Circ
5-1/2" 14# csg @ 3943' w/400sx, 7-7/8" hole, TOC-1634'-Calc
1. RIH & Set CIBP @ 3715' M&P 25sx cmt to 3565'
2. M&P 40sx cmt @ 2830-2630' WOC-Tag
3. Perf @ 1685', sqz 75sx cmt to 1485' WOC-Tag
4. Perf @ 357', sqz 140sx cmt to surface
10# MLF between plugs

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 4/26/11

Type or print name David Stewart


E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE STAFF MGR DATE 5-11-2011
Conditions of Approval, if any:

OXY USA WTP LP - Current
East Eumont Unit #37
API No. 30-025-05607

12-1/4" hole @ 307'
8-5/8" csg @ 307'
w/ 225sx-TOC-Surf-Circ

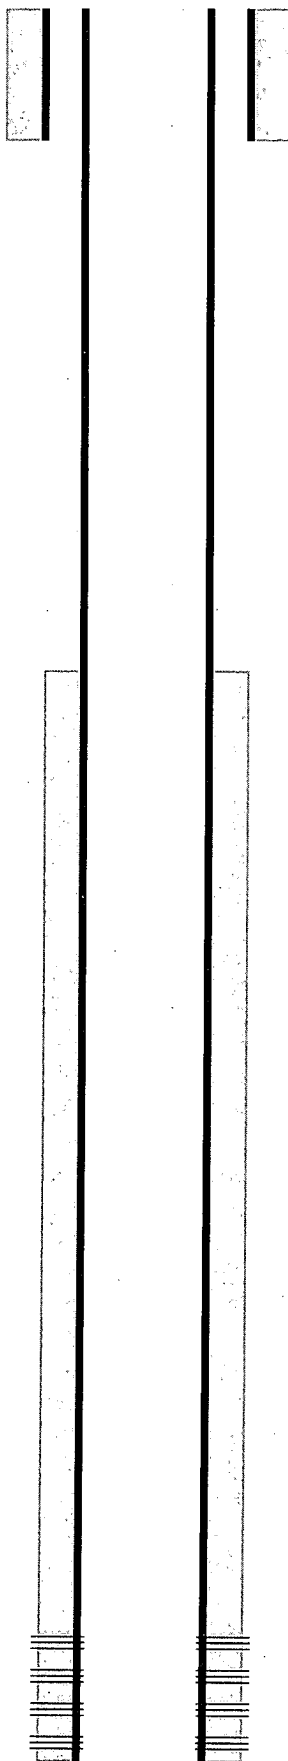

TD-3950'

7-7/8" hole @ 3950'
5-1/2" csg @ 3943'
w/ 400sx-TOC-1634'-Calc

Perfs @ 3765-3931'


OXY USA WTP LP - Proposed
East Eumont Unit #37
API No. 30-025-05607

140sx @ 357'-Surface

75sx @ 1685-1485' WOC-Tag

40sx @ 2830-2630' WOC-Tag

CIBP @ 3715' w/ 25sx

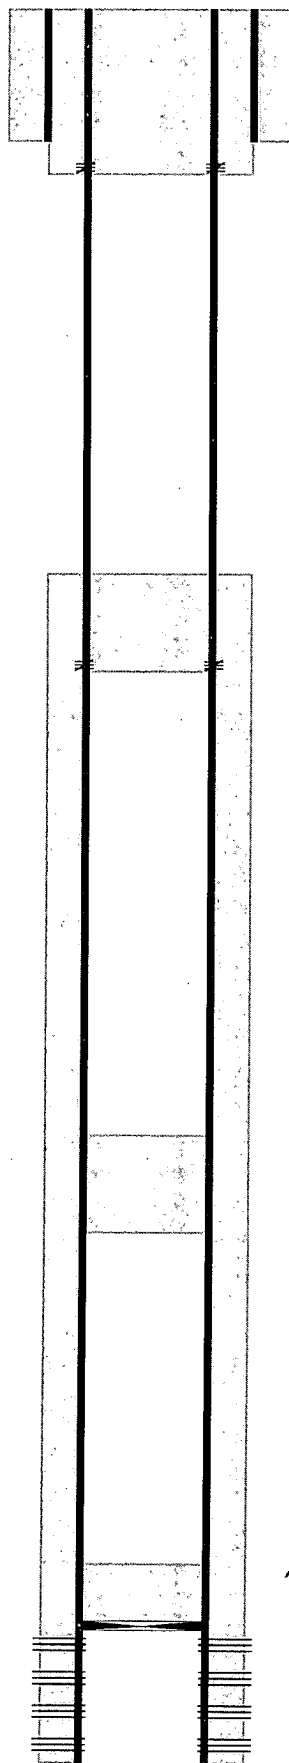

Perf @ 357'

12-1/4" hole @ 307'
8-5/8" csg @ 307'
w/ 225sx-TOC-Surf-Circ

Perf @ 1685'

/

7-7/8" hole @ 3950'
5-1/2" csg @ 3943'
w/ 400sx-TOC-1634'-Calc

Perfs @ 3765-3931'

TD-3950'