

District I
1625 N. French Dr., Hobbs, NM 88240

District II
1301 W. Grand Ave., Artesia, NM 88210

District III
1000 Rio Brazos Rd. Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Energy, Minerals and Natural Resources

HOBBS OCD

OIL CONSERVATION DIVISION

MAY 11 2011

1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

WELL API NO. 30-025-05616
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease NO. AO-1543
7. Lease Name or Unit Agreement Name North Monument Grayburg/SA Unit Blk. 3
8. Well Number 15
9. OGRID Numer 873
10. Pool Name Eunice Monument G/SA

SUNDRY NOTICES AND REPORTS ON WELLS

(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Apache Corporation

3. Address of Operator
303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705

4. Well Location
Unit Letter **O** : **660** feet from the **S** line and **1980** feet from th **E** line
Section **17** Township **19S** Range **37E** NMPM County **Lea**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3670' GL

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐
ALTERING CASING ☐
P AND A ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Guinn Burks TITLE Reclamation Foreman DATE 5/9/11

Type or print name Guinn Burks E-mail add. guinn.burks@apachecorp.com PHONE: 432-556-9143

For State Use Only

APPROVED BY: [Signature] TITLE STAFF MEMBER DATE 5-12-2011

Conditions of Approval (if any):



WELL BORE INFO.

LEASE NAME	North Monument Grayburg SA Unit Blk. 3
WELL #	15
API #	30-025-05616
COUNTY	Lea

10 3/4" 32# @ 281'
w/ 200 sx cmt to surf

TOC Cal @ 508'


7 5/8" 22# @ 1368'
w/ 175 sx cmt

TOC Cal @ 1596'

Note: (2007) found csg leaks @ 3425'-3681'
Did not repair csg.

Perfs @ 3495'-3668', sqzd in 1981
(1992) csg leak @ 3645'-3668', re-sqzd perfs

5 1/2" 17# @ 3808'
w/ 175 sx
OH @ 3808'-3995'

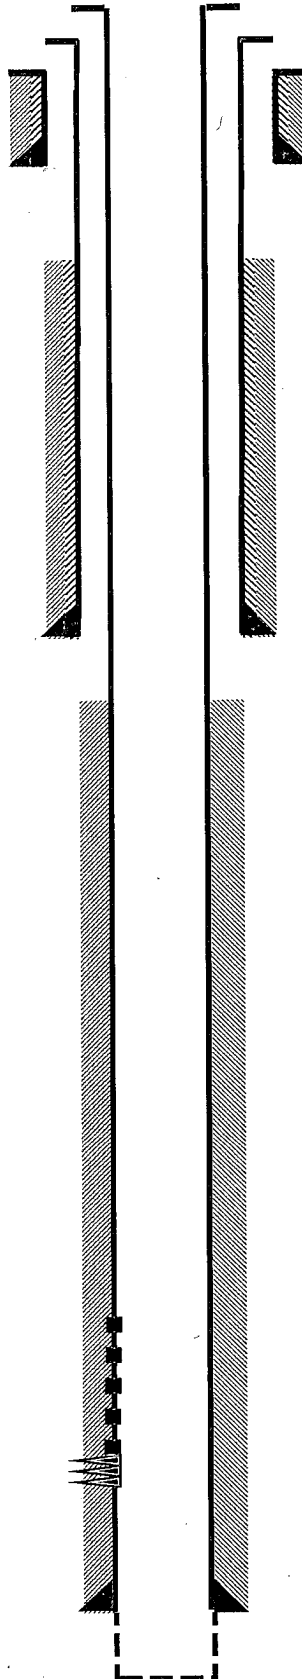



WELL BORE INFO.

LEASE NAME	North Monument Grayburg SA Unit Blk. 3
WELL #	15
API #	30-025-05616
COUNTY	Lea

PROPOSED PROCEDURE

10 3/4" 32# @ 281'
w/ 200 sx cmt to surf

TOC Cal @ 508'


7 5/8" 22# @ 1368'
w/ 175 sx cmt

TOC Cal @ 1596'

Note: (2007) found csg leaks @ 3425'-3681'
Did not repair csg.

Perfs @ 3495'-3668', sqzd in 1981
(1992) csg leak @ 3645'-3668', re-sqzd perfs

5 1/2" 17# @ 3808'
w/ 175 sx
OH @ 3808'-3995'

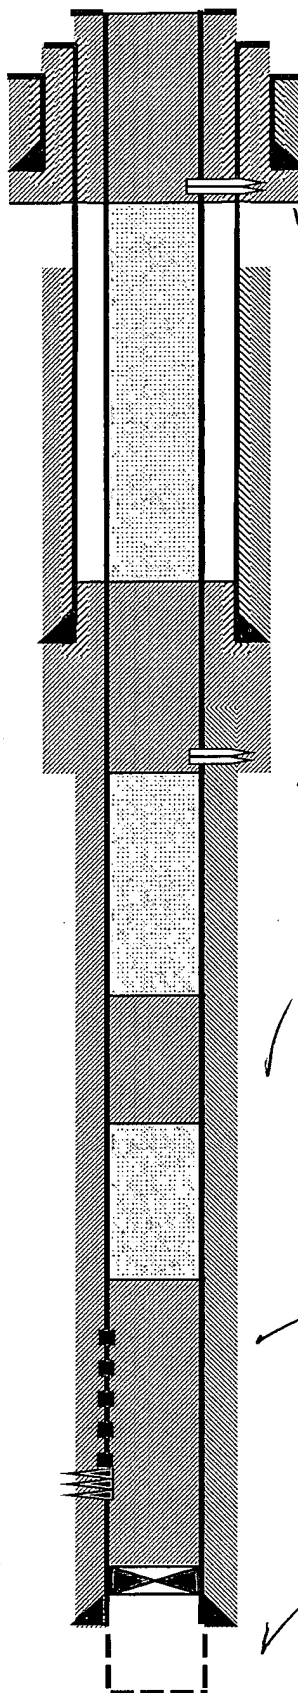

4. PUH & perf @ 331' & sqz 150 sx Class "C" cmt from 331' to surf, circ all strings to surf. (Shoe & Water Board)

3. PUH & perf @ 1819' and sqz 80 sx Class "C" cmt from 1819'- 1318' WOC/TAG (Top of Salt & Shoe)

2. PUH & 2810' & spot 30 sx Class "C" cmt from 2810'- 2510' WOC/TAG (Yates & Base of Salt)

1. MIRU, RIH w/WL & gauge ring to 3800'. RIH & set CIBP @ 3750'. POH w/WL & RIH w/tbg & circ w/ MLF & spot 40 sx Class "C" cmt from 3750'-3375' (Cover CIBP, Upper SA & holes in csg) *WOC-TAG*