


WEK DRILLING CO., INC. - Rig 1 & 3
BLOWOUT PREVENTER SPECIFICATION

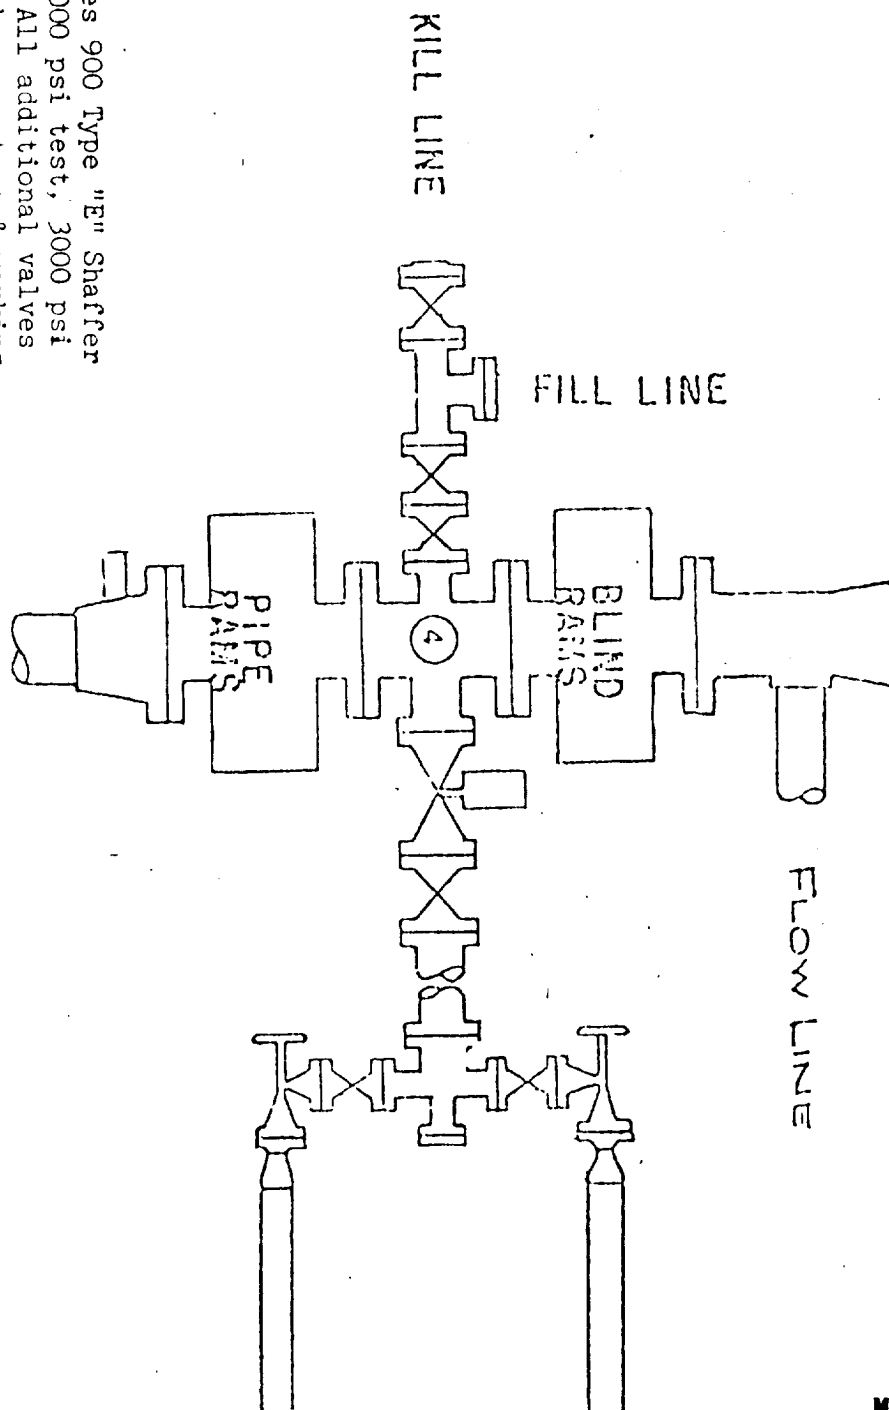

BOP's are 10" Series 900 Type "E" Shaffer Double Hydraulic 6000 psi test, 3000 psi working pressure. All additional valves & connections are the same test & working pressures.

EXHIBIT "E"
MANZANO OIL CORPORATION
 Sunburst Spence Federal, Well No. 2
 BOP Specifications

Rec'd 9/29/88

173

RECEIVED

JUN 6 1988

OCB
HOBBS OFFICE