


BLOWOUT PREVENTER ASSEMBLY

Shaffer 10" Series 900

Hydraulically Operated BOP

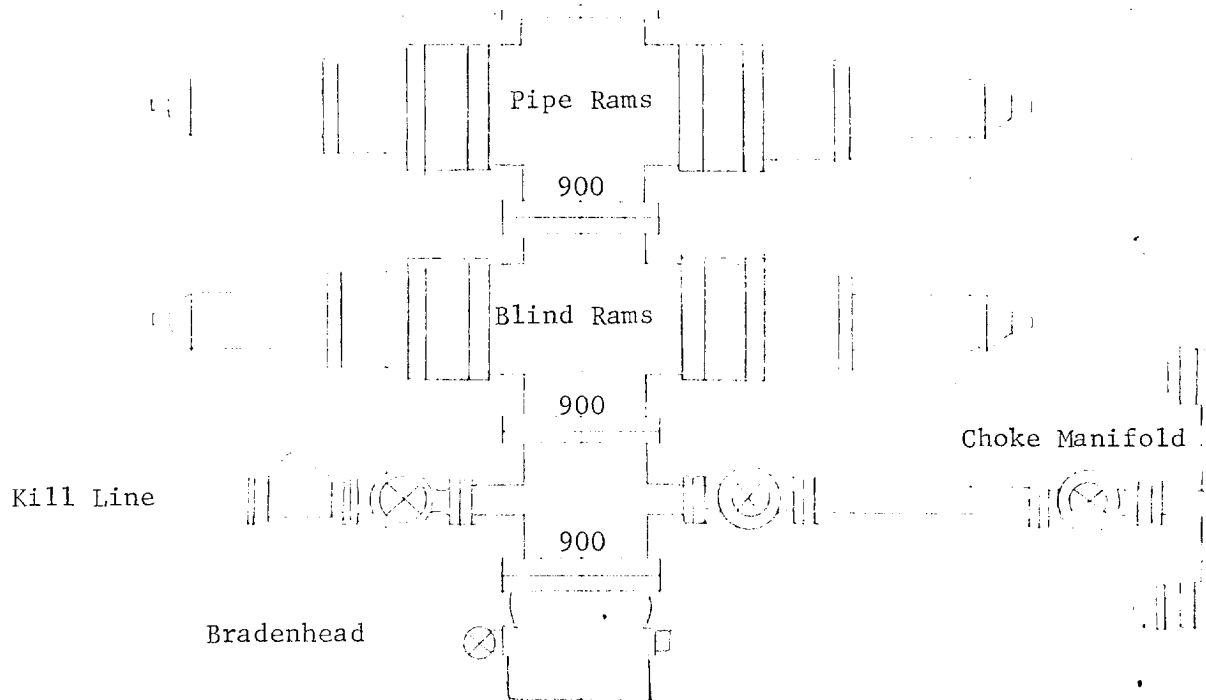

1. All preventers to be hydraulically operated with secondary manual controls installed prior to drilling out from under casing.
2. The preventers will be Type "E" 10" 900 Series Double Shaffer.
3. The preventers will be capable of closing off all open areas.
4. The preventers will be tested to 2000 psig after they are installed on the surface casing prior to drilling out, and each time they are removed or rearranged on the well head.
5. Operating controls will be located a safe distance from the rig floor.

RECEIVED

JUL 5 1979

U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO