

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐
2. NAME OF OPERATOR  
CONCRETE OIL COMPANY
3. ADDRESS OF OPERATOR  
1000 E. 10th St. Hobbs, N.M.
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1345/S + 2615/W  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐CHANGE ZONES ☐ABANDON\* ☐(other) ☐

SUBSEQUENT REPORT OF:

RECEIVED

JUN 20 1979

(NOTE: Report results of multiple completion or zone change on Form 9-130.)

U. S. GEOLOGICAL SURVEY  
HOBBS, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

waterflo repaired as follows:

6-4 MRCU, pull 109. RAUGR logs.

6-5 Perf @ 1998, 2000' w/2 JSF  
could not circ; squeeze w/100sx.

6-6 Perf @ 1200-02' w/4 shots.

6-7 could not circ. squeeze w/300sx.  
squeeze did not hold.

6-8 dild out

6-9 prep to re-squeeze

6-10 Re-squeeze w/200 sx Class Cement

press to 3800 psi held ok. T.O.C. 700'

6-14 dild out to 1245'

6-15 swab

6-16 dild to 2040' cement stringers. Perfs did not hold.

6-17 Squeezed w/ 200 sx Cl. H. cement.

follow w/ 100 sx.

6/18-20 Squeezed with to squeeze failed

Reg. in Ret. for further evaluation

Subsurface Safety Valve: Manu. and Type

Set @ \_\_\_\_\_ ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

Wm. C. Butterfield

TITLE Admin. Super.

DATE 6-20-79

(This space for Federal or State office use)

APPROVED BY

TITLE


CONDITIONS OF APPROVAL, IF ANY:

USGS 5

MCA 4

FILE

\*See Instructions on Reverse Side

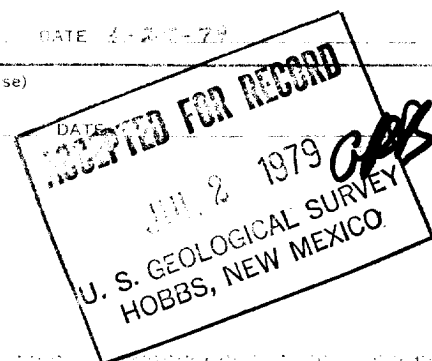

RECEIVED  
JUL 10 1973  
O.C.D. HOBBS, OFFICE

RECEIVED  
JUL - 1 1973  
O.C.D. HOBBS, OFFICE