


Plot #13

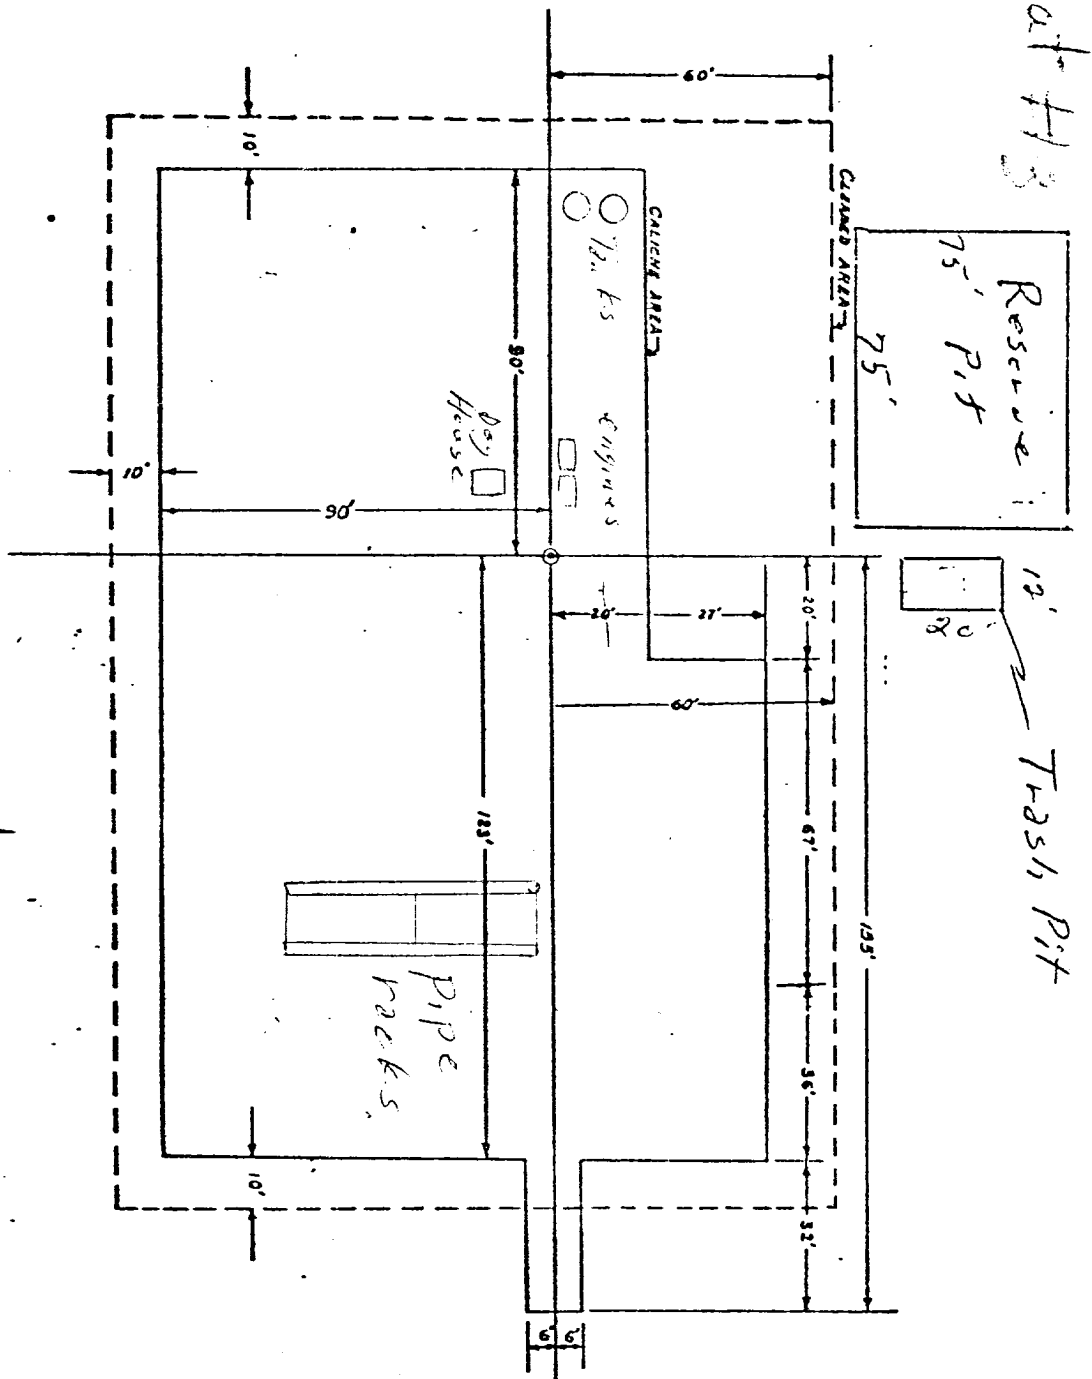

SPECIFICATIONS-

- A. LOCATION
 1. CONTRACTOR SHALL FURNISH, HAUL, DUMP, SPREAD, AND COMPACT CALICHE MINIMUM 6" SHALL BE 6" COMPACTED. WATER SHALL BE APPLIED AT THE APPROXIMATE RATE OF ONE GALLON PER SQ. FT. IN AREA OUTLINE BY SOLID AREA WITH DASHED LINE SHALL BE BUILT WITH PAD.
- B. ROAD WHERE APPLICABLE
 1. ROAD SHALL BE BUILT IN THE BEST LOCATION AND BE 24" MINIMUM OF 1/2" WIDE WITH CURBS AND GRA. SUCH AS TO ACCOMMODATE LOADED TRUCKS.
 2. ROAD SHALL BE COVERED WITH 6" COMPACTED CAL USING WATER AT THE RATE OF APPROX ONE GALLON PER SQ. FT.
 3. ATLANTIC SHALL FURNISH AT THE LOCATION 1/4" CATTLEGUARD, TIEBACK SIDS AND POST. CONTRACTOR SHALL INSTALL CATTLEGUARD TO LANDOWNER'S SPECIFICATIONS.
 4. EXTRA CALICHE FOR ALL TURNING RADIUS BE ANTICIPATED AND LINEAR MEASUREMENT REQUIREMENTS.
- C. GENERAL
 1. DRILLING MAT CONTAINS AN ESTIMATED 75% CU YDS. LOOSE MEASUREMENT.
 2. CONTRACTOR SHALL BE RESPONSIBLE TO ALL ROYALTIES INCLUDING PIT ENTRANCE FEE, IF ANY.
 3. CELLAR TO BE 8' X 14' WOOD FRAME.

BLUE PRINT RECORD	
NO.	DATE
1	5/18/71
2	5/18/71
3	5/18/71
4	5/18/71
5	5/18/71
6	5/18/71
7	5/18/71
8	5/18/71
9	5/18/71
10	5/18/71
11	5/18/71
12	5/18/71
13	5/18/71
14	5/18/71
15	5/18/71
16	5/18/71
17	5/18/71
18	5/18/71
19	5/18/71
20	5/18/71
21	5/18/71
22	5/18/71
23	5/18/71
24	5/18/71
25	5/18/71
26	5/18/71
27	5/18/71
28	5/18/71
29	5/18/71
30	5/18/71

AtlanticRichfield Company
ENGINEERING AND CONSTRUCTION DEPT

ATLANTIC BUILDING
STANDARD DRILLING MAT
FOR WELLS LESS THAN 8000 FEET

DATE	5/18/71
BY	J.K.
CHECKED	
APPROVED	
SCALE	AS SHOWN
FIG. NO.	001-00