


TENNECO OIL COMPANY
DIAGRAM & SKETCH OF PROPOSED DUAL COMPLETION
EQUIPMENT USA-TRIG NO. 1 - NM 0750 A

Lusk Strawn & Morrow Pays
Unit K Sec. 6-T-19-S, R-32-E
Lea County, New Mexico

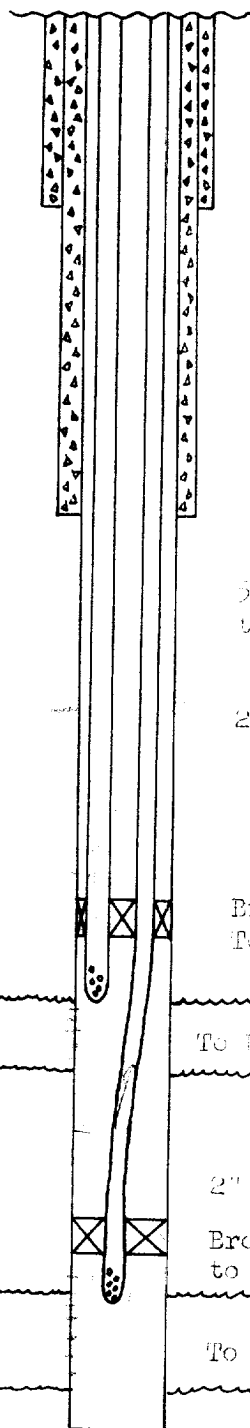

13 3/8 48# H-40 Csg. set at 685'.
Cmtd w/750 sx. Cement circulated.

6 5/8" OD 32# J-55 Csg. set at 4000'.
Cmtd w/2290 cubic feet

5 1/2" OD - 17# - J-55, 17# N-80 & 20# N-80 Casing
to be set at approximately 12,750'.

2" OD 3.4# N-80 Buttress Thrd Tubing

Brown Dual Hydraulic Set Packer
To be set at approximately 11,300'

STRAWN PAY

To Perforate between 11,450' & 11,520'

2" OD 3.40# N-80 Buttress Thrd Tubing

Brown Model HB-15-1 Packer
to be set at approximately 12,450'

MORROW GAS PAY

To Perforate between 12,400' & 12,700'

TENNECO OIL COMPANY
SUBSIDIARY OF TENNECO CORPORATION