

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.

30-025-26587

5. Indicate Type of Lease

STATE ☒

FEE ☐

6. State Oil & Gas Lease No.

L-786

7. Lease Name or Unit Agreement Name

Gulf State

8. Well No.

3

9. Pool name or Wildcat

Buckeye Abo

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

OIL
WELL ☒

GAS
WELL ☐

OTHER

2. Name of Operator

Bledsoe Petro Corp.

3. Address of Operator

3908 N. Peniel, Suite 500, Bethany, OK 73008

4. Well Location

Unit Letter E : 1980 Feet From The North Line and 660 Feet From The West Line

Section 9

Township 18S

Range 35E

NMPM

Lea

County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐

PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐

CHANGE PLANS ☐

PULL OR ALTER CASING ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

1. Set CIBP in 4 1/2" casing at 8500'-spot 35' cement (35x) on plug.
2. Fill 4 1/2" casing with 9.3#/gal plug mud
3. Cut off 4 1/2" casing at free point, estimated at 4800'.
4. Spot 100' cement stub plug in open hole at 4 1/2" casing cut off.
5. Pull 4 1/2" casing
6. Spot 100' cement plug across 8 5/8" casing shoe at 3606'.
7. Spot cement plug in 8 5/8" casing from 30' back to surface.

100' cement plug at 1000'
all plugs must be set thru the
20 x min plug

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

Vice President

DATE 5/1/91

TYPE OR PRINT NAME

Gary J. Garbacz

(405) 789-5053

TELEPHONE NO.

(This space for State Use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:


24

GULF STATE No. 3

SoC 9-185-35E

LEA County, New Mexico
Bo. FORT

EXISTING CONDITION

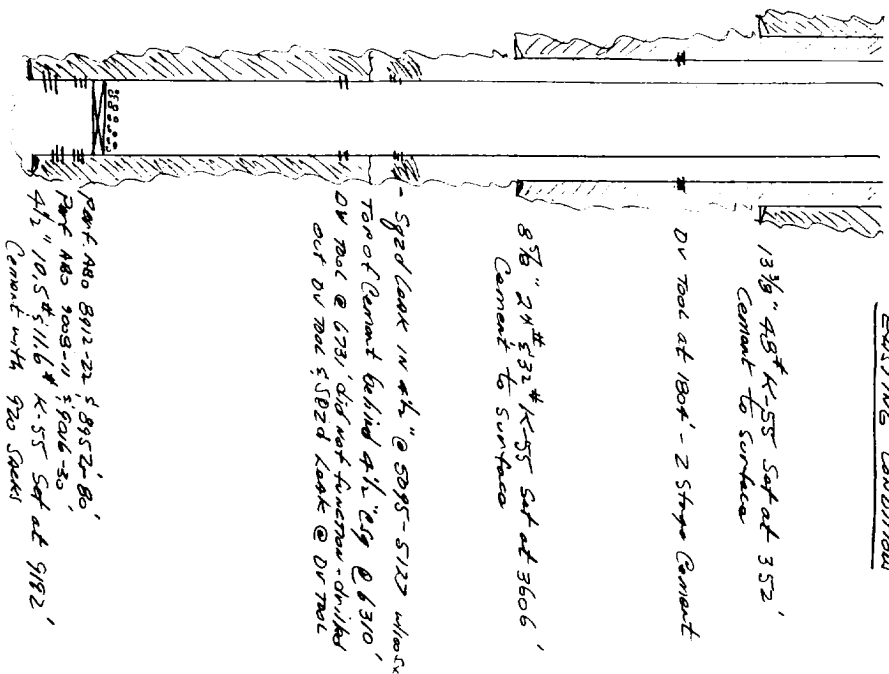

PROPOSED

Rement plug from
35' back to surface

