
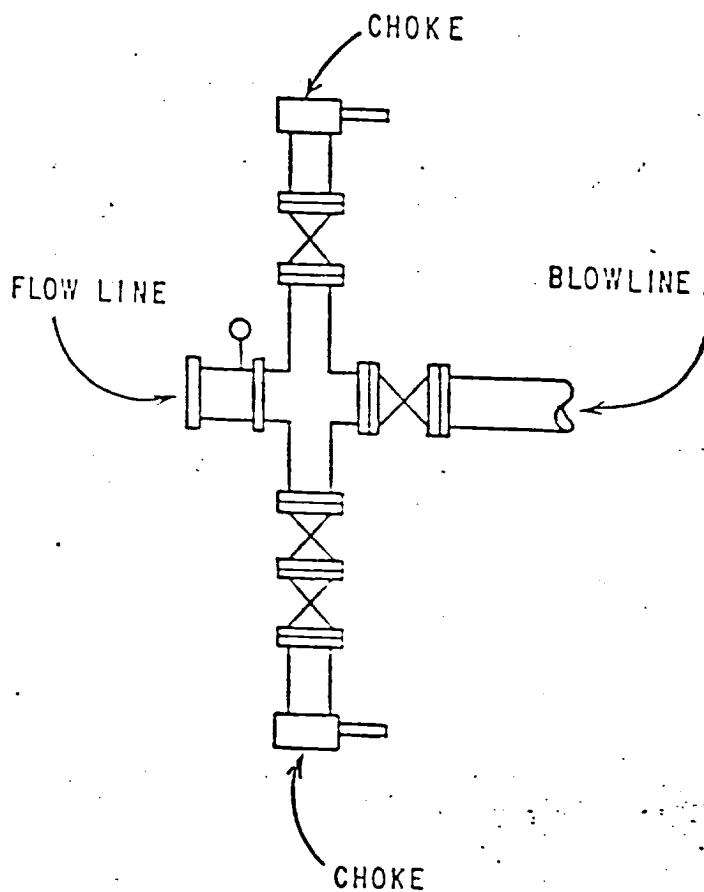


# BLOWOUT - PREVENTER ASSEMBLY

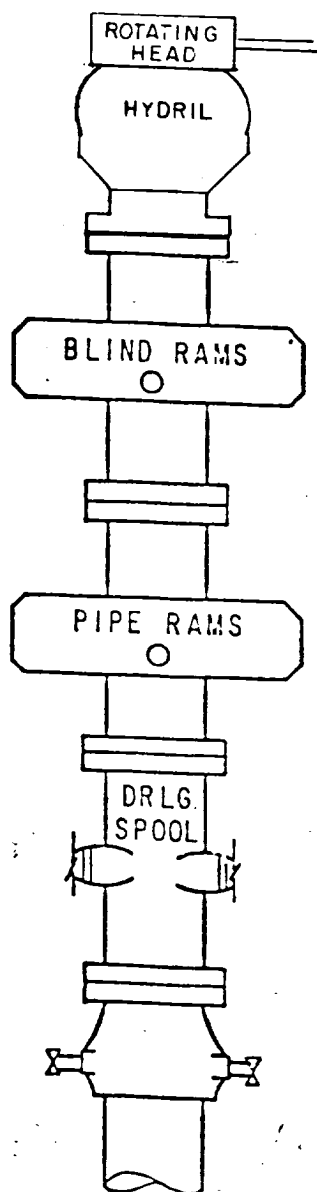

## Pressure control equipment:

After setting the 8-5/8" casing string and before drilling into Wolfcamp formation, the blowout preventers and related control equipment shall be pressure tested to rated working pressures. Any equipment failing to test satisfactorily shall be repaired or replaced. This office should be notified in sufficient time for a representative to witness the tests and shall be furnished a copy of the pressure test report.

Pipe rams and the annular-type preventer shall be actuated at least once each 24 hours and the blind rams each time the drill pipe is out of the hole.

FILE  
Rec'd 2-15-88 (out 5-15)