SUBMIT IN TRIPLICATE* (Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

UNITED STATES DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

	30.	28	'Z	2	3	75	· ~
5.	LEASE	DESIGN	MOITA	AND	SERI	AL NO.	
	SF	077	092-	-A			

APPLICATION	N FOR PERMIT	TO DRILL DE	EPEN, OR PLUG	BACK	6. IF INDIAN, ALLOTTER	OR TRIBE NAME
a. TYPE OF WORK					-	
DRI	LL 🖺	DEEPEN	PLUG BA	ACK ∐	7. UNIT AGREEMENT N	AME
	AS COTHER		SINGLE X MULT		8. FARM OR LEASE NAM	· · · · · · · · · · · · · · · · · · ·
NAME OF OPERATOR	ELL COTHER		zone zone		Florance H	
El Paso Nat	cural Gas Con	mpany			9. WELL NO.	
ADDRESS OF OPERATOR					2	_
	Farmington				10. FIELD AND POOL, O	
LOCATION OF WELL (R At surface	1800'S, 8		ny State requirements.*)	;	Blanco Pic	LK.
At proposed prod. zon	e same				Sec. 1, T-29	-N,R-10
. DISTANCE IN MILES	ND DIRECTION FROM NE	AREST TOWN OR POST OF	FFICE*	· - :	12. COUNTY OR PARISH	13. STATE
2.5 miles r	orth of Blan	nco, NM			San Juan	NM
DISTANCE FROM PROPO LOCATION TO NEAREST PROPERTY OR LEASE L (Also to nearest drig	INE, FT.	850'	160.66		OF ACRES ASSIGNED THIS WELL	160.66
. DISTANCE FROM PROP	OSED LOCATION®	19	PROPOSED DEPTH	20. ROT.	ARY OR CABLE TOOLS	<u> </u>
TO NEAREST WELL, DE OR APPLIED FOR, ON THE	RILLING, COMPLETED, S LEASE, FT.	250'	2575 '	Rota	ry	fig. se
5899 GL	ther DF, RT, GR, etc.)		9-10-1	<u>-</u>	22. APPROX. DATE WO	K WILL START
		PROPOSED CASING	AND CEMENTING PROG	RAM		
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH		QUANTITY OF CEMEN	T ,
12 1/4"	8 5/8"	24.0#	120'	106	cu.ft.circ.to	
6 3/4"	2 7/8"	6.4#	2575'		cu.ft.cover C	
A 3000 psi	WP and 6000	psi test do	er fracture the ouble gate pre for blow out p	evente	c equipped wi	.th
-4	dedicated.	ir be used i		15 197		
The SW/4 of	Section lis	s dedicated	to this well	m no out,	STIRVE CON	· COM /
	irill or deepen direction		or plug back give data on ta on subsurface locations		luctive zone and proposed	new Foducti
SIGNED MAG	Tradfie	LA TITLE	Drilling	Clerk	DATE 8-13-	·79
(This space for Feder	al or State office use)			<u></u>		
PERMIT NO.			APPROVAL DATE			
APPROVED BY	I. IF ANY	TITLE _		· · · · · · · · · · · · · · · · · · ·	DATE	
121	ery are there a			•		Tie Lie

ak Sruh

*See Instructions On Reverse Side

NIMOCC

STATE OF NEW MEXICO

1320 1650

OIL CONSERVATION DIVISION P. O. BOX 2088 SANTA FE, NEW MEXICO 87501

Form C-102

ENERGY AND MINERALS DEPARTMENT kevised 10-1-78 All distances must be from the cuter boundaries of the Section. Operator Lease Well No. EL PASO NATURAL GAS COMPANY FLORENCE "E" (SF-077092-A) Unit Letter Section Township Τ. 1 10W San Juan Actual Footage Location of Well: South feet from the line and line Ground Level Elev. Producing Formation Pool Dedicated Acreage: 5899 PICTURED CLIFFS BLANCO PICTURED CLIFFS 160.66 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? Yes ΠNο If answer is "yes," type of consolidation If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commis-CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Drilling Clerk Paso Natural Gas Co. <u>August 13, 1979</u> Date Sec. 1 I hereby certify that the well location SF-077092-A shown on this plat was plotted from field notes of actual surveys made by me or <u>850'</u> under my supervision, and that the same is true and correct to the best of my knowledge and belief. Date Surveyed July 26 Registered Professional Engineer

> Certificate No. 3950



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401 PHONE: 505-325-2841

Multi-Point Surface Use Plan Florance E: #2

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

 All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines - Please refer to Maps No. 1 and No. 2. Map No. 2 shows the existing gas gathering lines. Map No. 1 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from Bloomfield Ditch.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.

- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is sagebrush flats with sagebrush and grass growing. Cattle are occasionally seen on the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. A. Aimes

Project Drilling Engineer

Operations Plan - Florance E #2

I. Location: 1800'S, 850'W, Section 1, T-29-N, R-10-W, San Juan County, NM
Field: Blanco Pictured Cliffs Elevation: 5899'GR

II. Geology:

A. Surface Formation: Nacimiento

Sub-surface Formation Tops:

Ojo Alamo	1200'	Pictured Cliffs	2395
Kirtland	1315'	Lewis	2535'
Fruitland	2100'	Total Depth	2575 '

- B. Logging Program: Induction Electric and Gamma Ray Density at TD.
- C. Coring: none
- D. Testing: none

III. Drilling:

A. Anticipated Starting Date and Duration of the Project:

1979 Drilling Program - approximately 4 days to complete.

B. Circulating Medium: Treated water and a low solids gel base mud will be used from surface to TD.


IV. Materials:

A. Casing Program:	Hole Size	Depth	Csg.Size	Wt.&Grade
	12 1/4"	120 '	8 5/8"	24.0# J-55
	6 3/4"	2575 '	2 7/8"	6.4# J-55


- B. Float Equipment: 8 5/8" surface casing cement guide shoe.
 - 2 7/8" production casing 10' shoe joint with notched collar for guide shoe and 2 7/8" latch down baffle on top. Two 3 1/16" balls and one 2 7/8" latch down plug.
- C. Tubing: none
- D. Wellhead Equipment: Hercules Wellhead Type CE (Fig.1-CE)

V. Cementing:


- 8 5/8" surface casing 90 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (106 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing wellhead and BOP to 600#/30 minutes.
- 2 7/8" production precede cement with 5 bbls. water. Cement with 208 sks. of 65/35 Class "B" Poz with 6% gel and 8.3 gallons water per sack followed by 65 sks. 50/50 Class "B" Poz with 2% gel (420 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Spot 50 gallons of 7 1/2% acetic acid on top of plugs. Run temperature survey after 12 hours.

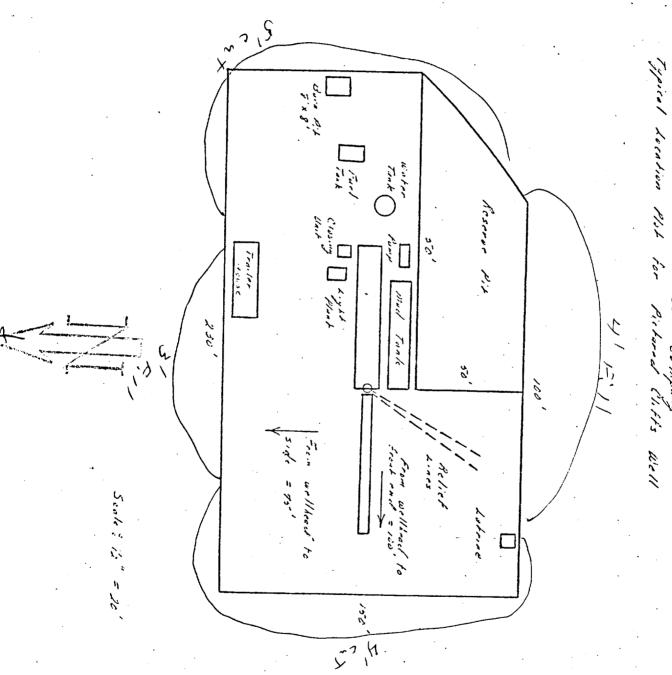


Typical Mud Drilled B.O.P. Installation for Pictured Cliffs Well

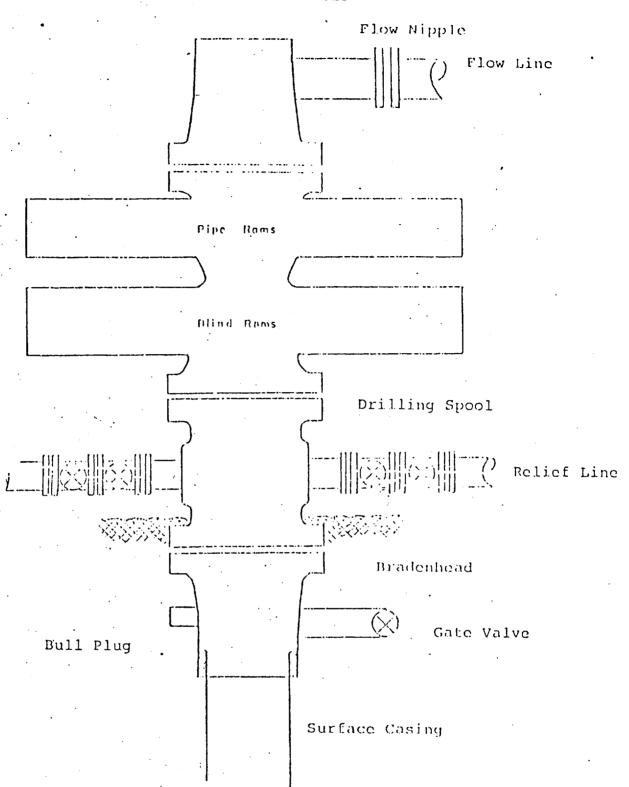

8" Series 900 Double Gate BOP, rated at 3000 psi Working Pressure

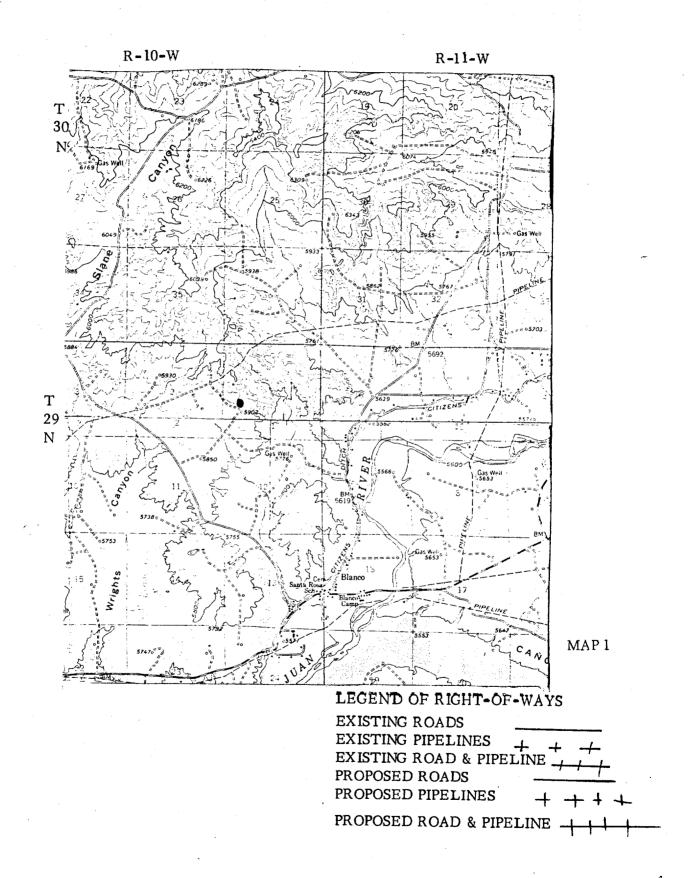

El Paso Natural Gas Company Florance E #2 SW 1-29-10

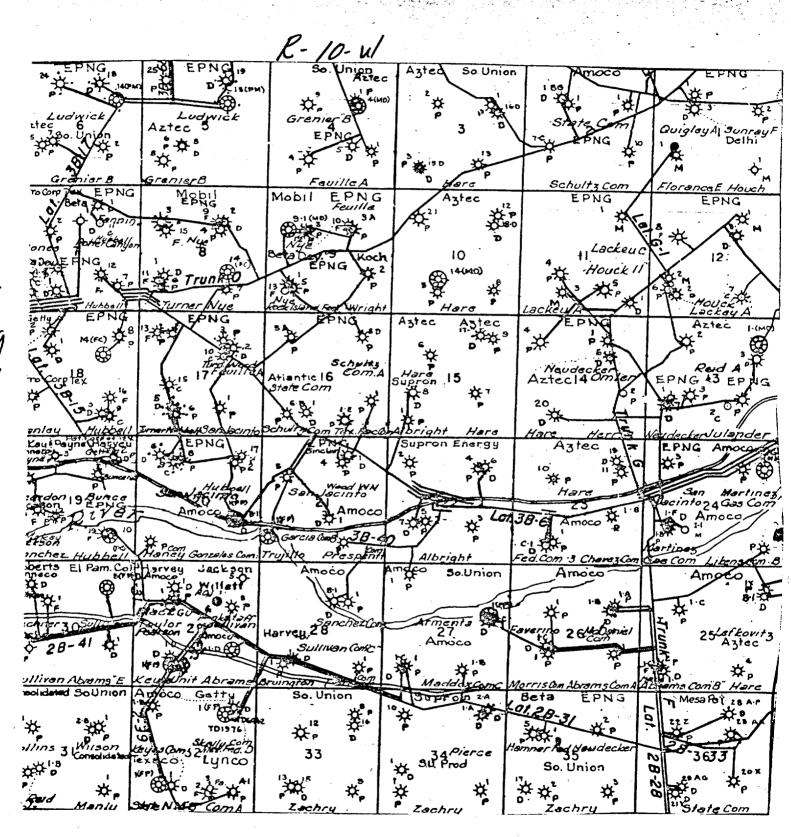

MAP 2