

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR
Amoco Production Company

3. ADDRESS OF OPERATOR
501 Airport Drive Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 900' FSL x 1820' FEL, Section 15,
AT TOP PROD. INTERVAL: Same T29N, R12W
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
NM-048573

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Bruington Gas Com "B"

9. WELL NO.
1E

10. FIELD OR WILDCAT NAME
Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
SW/4 SE/4 Section 15, T29N, R12W

12. COUNTY OR PARISH
San Juan

13. STATE
NM

14. API NO.
30-045-24008

15. ELEVATIONS (SHOW DF, KDB, AND WD)
5547'

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐ ☐

FRACTURE TREAT ☐ ☐

SHOOT OR ACIDIZE ☐ ☐

REPAIR WELL ☐ ☐


PULL OR ALTER CASING ☐ ☐

MULTIPLE COMPLETE ☐ ☐

CHANGE ZONES ☐ ☐

ABANDON* ☐ ☐

(other) Spud and Set Casing

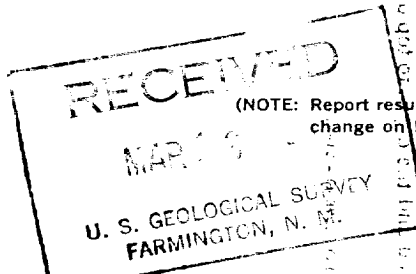

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded a 12-1/4" hole on 1-25-80 and drilled to 299'. Set 8-5/8", 24.0# surface casing at 299' on 1-25-80 and cemented with 315 sx class "B" Neat cement containing 2% CaCl₂. Circulated 20 sx Good cement to surface. Drilled a 7-7/8" hole to a TD of 6261'. Set 4-1/2", 11.6# production casing at 6261' on 2-2-80 and cemented the first stage with 330 sx class "B" Neat cement containing 50:50 Poz, 6% gel, 2# Medium tuf plug per sx, and .8% fluid loss additives. Tailed in with 100 sx class "B" Neat cement. Cemented the second stage with 780 sx class "B" Neat cement containing 65:35 Poz, 6% gel, 2# Medium tuf plug per sx, and .8% fluid loss additives. Tailed in with 100 sx class "B" Neat cement. Set DV tool at 4434'. Released the rig on 2-3-80.

Subsurface Safety Valve: Manu. and Type _____

18. I hereby certify that the foregoing is true and correct


SIGNED E. E. SVOBODA TITLE Dist. Adm. Supvr. DATE _____

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

NMOCC

*See Instructions on Reverse Side



ACCEPTED FOR RECORD

MAR 12 1980

FARMINGTON DISTRICT
BY M. L. Kuchera