

WELL COMPLETION SKETCHES

LOCATION

Sec 9-225-36E
660' FNL + 660' FEL

WELL

Account 2 # 50

FIELD

Eunice SR Qv South

DATE

6-8-94


☐ PRESENT COMPLETION

☒ SUGESSTED COMPLETION

PERMANENT WELL BORE DATA

WELL HISTORY

8 5/8" 24# @ 320' cmt w/ 300sx

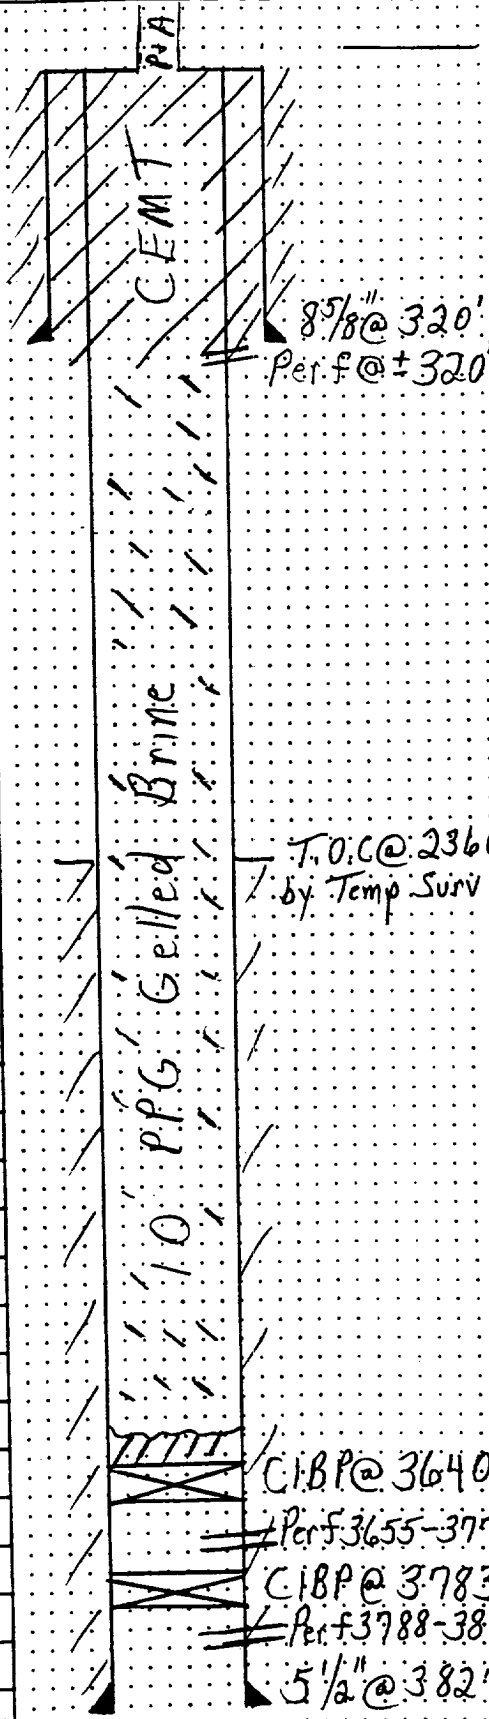

10/60- Perf 3788-3810
Vibro 3798-3804
S.D.T. w/ 20000 goil + 20000 #s.
9/70- Set CIBP @ 3783'
Perf 3655-3771
Acid w/ 1500g
Frac w/ 25000 gel + 30000 #
3/94- L.D. Rods + Tbg
Set CIBP @ 3640'
35' cement on CIBP

Tops: Tansill: 2982'
Yates: 3169'
Seven Rivers: 3378'

T.O.C @ 2360
by Temp Surv

Proposed P+A Procedure
1) CIBP @ 3640 (3/94)
2) Circ 10# Gelled Brine
3) Perf 5 1/2" csg @ ± 32
4) Circ Cmt down 5 1/2"
Up 5 1/2" 8 5/8" Ann.
5) Set P+A Mortar

5 1/2" 14# @ 3827' cmt w/ 250sx

CIBP @ 3640
Perf 3655-3771
CIBP @ 3783
Perf 3788-3810
5 1/2" @ 3827'