

WELL COMPLETION SKETCHES

LOCATION

Sec 8-22S-36E
2030' FSL + 660' FWL

WELL

A/C-2 #58-L

FIELD

Eunice - SR - Q, South

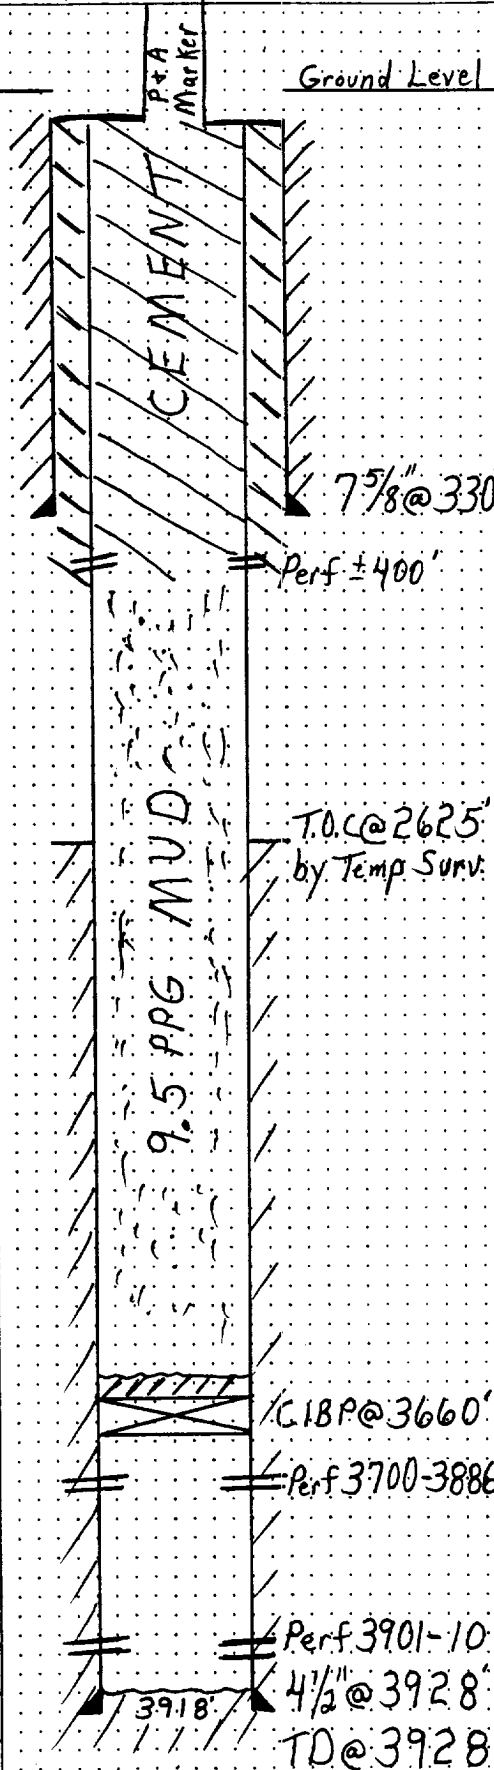
DATE

2-20-92

☐ PRESENT COMPLETION☒ SUGGESTED COMPLETION for PNA *

PERMANENT WELL BORE DATA

WELL HISTORY

7 5/8" 24" @ 330' cmtw/250sx
to SurfaceTops: Tansill - 3100
Yates - 3275
Seven Rivers - 3472
Queen - 39004 1/2" 9.5" @ 3928' cmtw/250
sx T.O.C @ 2625 by Temp.
Surv.

10/64 - Perf 3901-10
Acid w/ 1000g 15%
S.O.T.w/ 20000g oil + 20000#
12/65 - Perf 3700-3886
Set RBP @ 3895
Acid w/ 1000g 15%
S.O.T.w/ 45000g oil + 51000#
Pull RBP - P.O.P.
12/91 - Set C18P @ 3660'
w/ 15' cmt above
Ran Csg Insp. Log
Csg Bad 391 to 2530
Decision to P+A

P+A Proposal:

- 1) Circulate 9.5 PPG Mud
- 2) Perf ± 400'
- 3) Circ Cmt to Surface
in 7 5/8" / 4 1/2" Annulus
and Inside 4 1/2" Csg
- 4) Cut Csg 3' below
Ground Level and
Set P+A Marker

C18P @ 3660'

Perf 3700-3886

Perf 3901-10

4 1/2" @ 3928'

TD @ 3928'

RECEIVED
FEB 24 1992
DCD HOPPE