

Submit 3 Copies To Appropriate District Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO. 30.025.24418
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: W. C. ROACH
8. Well No. 5
9. Pool name or Wildcat EUNICE MONUMENT GRBG SA

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
B.P. AMERICA PRODUCTION CO.

3. Address of Operator
P. O. 1089 EUNICE N.M. 88231

4. Well Location
Unit Letter F : 1650 feet from the NORTH line and 1650 feet from the WEST line
Section 21 Township 20s Range 37e NMPM County lea

10. Elevation (Show whether DR, RKB, RT, GR, etc.)
3512 gr


11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPLETION <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>	OTHER: <input type="checkbox"/>
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD: 3808 PBD:3798 PERFS: 3266-3593

MIRUPU. NDWH, NUBOP POH W/ PRODUCTION TBG.
RIH W/ WIRELINE SET CIBP @ 3216'
SPOT 35' CMT PLUG ON TOP OF CIBP
DISPLACE HOLE W/ 9.5 LB MUD
PU AND SPOT 25 SX CMT PLUG @ 1250' - 1350' (TOP OF SALT)
POH PERF @ 50' BELOW TOP OF SHOE @ 425'
RIH W/ TBG PUMP CMT 50' OUT AND 50' IN (50 SX)
POH W/ TBG NDWH SPOT 10 SX CMT, OR 60' TO SUF.
CUT OFF WELLHEAD AND INSTALL DRY HOLE MARKER
RDPU. P&A WELL BORE

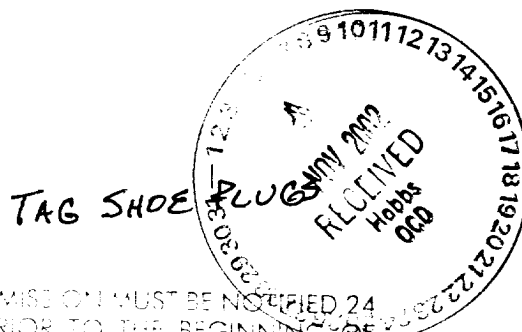

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Jim Pierce TITLE Operations supervisor DATE 11/4/02

Type or print name Jim Pierce

Telephone No. (505) 677-3642

APPROVED BY Hay W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER

Conditions of approval, if any:

DATE NOV - 5 2002

WELLBORE SCHEMATIC

10 SX CMT
60' TO SURF.

W. C. ROACH #5

1650' FNL & 1650' FWL
Sec 21, T-20S, R37E, Lea County, NM
3512 gr

8-5/8" casing @ 425'
Cmt Circulated to surface

PERF 50' BELOW SHOE
50' OUT AND 50' IN (50 SX)

25 SX CMT AT TOP OF SALT
1250' TO 1350'

TOC @ 1510' by TS

35' CMT PLUG

CIBP @ 3216'

Perfs @ 3266' to 3593'

4-1/2" csg @ 3808'

TD @ 3808".

PBD @ 3798"