

40. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

OIL CONSERVATION DIVISION
P. O. BOX 2088
SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-73

5a. Indicate Type of Lease	
State ☐	Fee ☒
5. State Oil & Gas Lease No.	

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL ☒ Dual GAS WELL ☐ OTHER ☐	7. Unit Agreement Name
2. Name of Operator ARCO Oil and Gas Company Division of Atlantic Richfield Company	8. Farm or Lease Name Roy Barton
3. Address of Operator Box 1710, Hobbs, New Mexico 88240	9. Well No. 4
4. Location of Well UNIT LETTER G 1750 FEET FROM THE North LINE AND 1980 FEET FROM THE East LINE, SECTION 23 TOWNSHIP 21S RANGE 37E NMPM.	10. Field and Pool, or Wildcat Blinebry/Drinkard
15. Elevation (Show whether DF, FT, GR, etc.) 3397' GR	12. County Lea

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐
PULL OR ALTER CASING ☐

PLUG AND ABANDON ☐
CHANGE PLANS ☐

OTHER Commingle Downhole ☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING TEST AND CEMENT JOB ☐
OTHER ☐

ALTERING CASING ☐
PLUG AND ABANDONMENT ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Propose to commingle Blinebry and Drinkard downhole in accordance w/Order No. DHC-211 in the following manner:


1. Rig up, kill well, install BOP, POH w/dual compl assy.
2. Drill Model D pkr @ 6345'.
3. RIH w/RBP & pkr, set BP @ 6600', pkr @ 6400', treat Drkd perfs 6461-6575', acidize w/ 1500 gals 15% HCL w/150#benzoic acid flakes & 600 gal xylene.
4. Re-set BP @ 5950', pkr @ 5675', treat Bly perfs 5729-5893' w/2000 gals 15% HCL w/150# benzoic acid flakes & 800 gals xylene.
5. POH w/RBP & pkr.
6. RIH w/2-3/8" OD tbg, perf nipple & API SN. Set perf nipple @ approx 6605', Return to production.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED [Signature] TITLE Dist. Drlg. Supt. DATE 12/5/79

APPROVED BY [Signature] TITLE DATE DEC 10 1979

CONDITIONS OF APPROVAL, IF ANY:

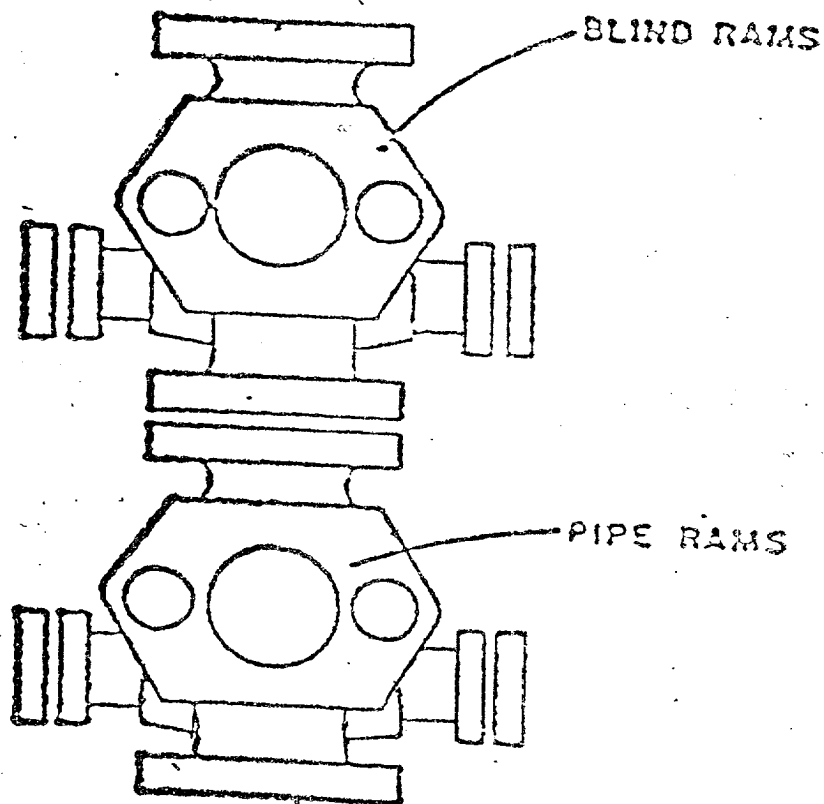

ATLANTIC RICHFIELD COMPANY
Blow Out Preventer Program

Lease Name Roy Barton

Well No. 4

Location 1750' FNL & 1980' FEL
Sec 23-21S-37E, Lea County

BOP to be tested before installed on well and will be maintained in good working condition during drilling. All wellhead fittings to be of sufficient pressure to operate in a safe manner.