

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised March 25, 1999

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL APNO. 30-025-21894
1. Type of Well Oil Well ☐ Gas Well ☒ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. <u>Chevron USA, Inc.</u>		6. State Oil & Gas Lease No.
3. <u>15 Smith Rd. Midland, Tx 79705</u>		7. Name of the Unit Eunice Monument South Unit
4. <u>Unit Letter P</u> <u>760</u> feet from the <u>South</u> line and <u>660</u> feet from the <u>East</u> line Section <u>16</u> Township <u>21-S</u> Range <u>36-E</u> NMPM County <u>Lea</u>		8. <u>424</u>
10. Elevation (Show whether DR, RKB, RT, GR, etc.)		9. <u>Eunice Monument Grayburg S.A.</u>

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPLETION ☐	CASING TEST AND CEMENT JOB ☐	
OTHER: ☐		OTHER: ☐	

12. Indicate proposed work completion dates. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24 Hrs Prior to MI & Ru.
2. Set 4 1/2" CIBP @ 3710' (Grayburg) spot 30sx plug 3710' - 3400' (Queen) WOC Tag
3. Displace hole w/MLF, 9.5# Brine w/25# Gel P/BBL.
4. Spot 20sx plug 2600' - 2400' (B-salt)
5. Perf 4 holes @ 1400', sqz 75sx plug 1400' - 1100' (8 5/8" shoe, T-salt) WOC Tag.
6. 10 sx plug 50' - surf, Install dry hole marker.

→ 100' PLUG F/400' - 300'

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE D. R. Bledsoe TITLE HES SPECIALIST DATE 7/16/2002

Type or print name G.R. BLEDSOE Telephone No. 9156877153

APPROVED BY E. Gonzalez TITLE PAUL F. KAUTZ DATE 3-6-03
(This space for State use) ORIGINAL SIGNED BY PETROLEUM ENGINEER


Conditions of approval, if any: JUL 18 2002

PLUGGING & ABANDONMENT WORKSHEET

(2 STRING CSNG)

OPERATOR CHEVRON USA Inc
LEASE NAME EUNICE Monument South Unit
WELL # 424

SECT 16 TWN 21-S RNG 36-E
FROM 760 N/S L 660 E/W L
TD 4058 FORMATION @ TD
PBTD FORMATION @ PBTD Grayburg

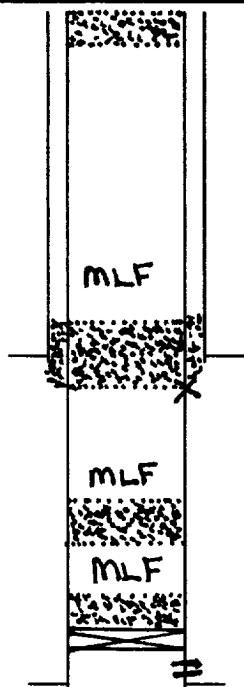

8 5/8
@ 1311
TOC Circ

4 1/2
@ 4057
TOC 2250

TD 4058

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	<u>8 5/8</u>	<u>1311</u>	<u>SURF</u>	<u>Circ.</u>
INTMED 1				
INTMED 2				
PROD	<u>4 1/2</u>	<u>4057</u>	<u>2250</u>	<u>TS</u>

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1		PERFS <u>3760 - 4028</u>
INTMED 2		OPENHOLE
PROD		

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	<u>1</u>	<u>CIBP</u>	<u>30</u>	<u>3710</u>
YATES	<u>2</u>	<u>B-SALT</u>	<u>20</u>	<u>2600</u>
QUEEN	<u>3</u>	<u>8 5/8 S</u>	<u>75</u>	<u>1400</u>
GRAYBURG	<u>4</u>	<u>SURF</u>	<u>10</u>	<u>50</u>
SAN ANDRES				
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				