

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other

2. NAME OF OPERATOR

SUPRON ENERGY CORPORATION

3. ADDRESS OF OPERATOR

P.O. Box 808, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1575 ft./S ; 1520 ft./W line

AT TOP PROD. INTERVAL: Same as above

AT TOTAL DEPTH: Same as above


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐

(other) Ran 2-7/8" tubing as casing string

SUBSEQUENT REPORT OF

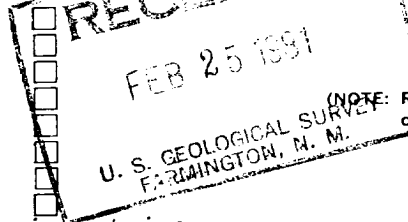

5. LEASE

SF 047019 A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Summit

9. WELL NO.

11

10. FIELD OR WILDCAT NAME

Bloomfield Chacra Ext.

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 34, T-29N, R-11W, N.M.P.M.

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

5546 R.K.B.

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1. Drilled 6 1/2" hole with mud to total depth of 2965 ft. R.K.B. Total depth was reached on 2-22-81.
2. Ran 95 joints of 2-7/8", E.U.E., 6.50# casing and set at 2962 feet R.K.B. with float collar at 2931 feet R.K.B.
3. Cemented with 350 sacks of 65-35-12 with 12 1/2 lbs. of Gilsonite per sack and 200 sacks of 50-50 POZ mix with 2% gel and 10% salt. Plug down at 6:20 p.m. 2-23-81.
4. Circulated 30 bbls. of cement slurry to surface.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kenneth E. Roddy TITLE Production Supt. DATE February 24, 1981

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

FEB 26 1981

NMCCC

\*See Instructions on Reverse Side

FARMINGTON DISTRICT

BY BW