

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. 1st Street, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-101
Revised March 17, 1999

Oil Conservation Division
2040 South Pacheco
Santa Fe, NM 87505

Submit to appropriate District Office
State Lease - 6 Copies
Fee Lease - 5 Copies

☐ AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

¹ Operator Name and Address BP AMERICA PRODUCTION COMPANY 501 WESTLAKE PARK BLVD, RM 5.174; HOUSTON, TX 77079		² OGRID Number 000778
		³ API Number 30-025-35853
⁴ Property Code 29451	⁵ Property Name Mae F. CURRY	⁶ Well No. 3

⁷ Surface Location

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County
1/D	7	21S	37E		660	NORTH	660	WEST	LEA

⁸ Proposed Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County
⁹ Proposed Pool 1 HARDY (TUBB-DRINKARD)					¹⁰ Proposed Pool 2				

¹¹ Work Type Code N	¹² Well Type Code O	¹³ Cable/Rotary R	¹⁴ Lease Type Code P	¹⁵ Ground Level Elevation 3490'
¹⁶ Multiple NO	¹⁷ Proposed Depth 7000'	¹⁸ Formation TUBB-DRINKARD	¹⁹ Contractor Capstar	²⁰ Spud Date 3/15/02

²¹ Proposed Casing and Cement Program

Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
11	8-5/8	32	1300	420	SURFACE
7-7/8	5-1/2	15.5	7000	1065	SURFACE

²² Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.
Subject well planned as a 7000' straight hole.

Permit Expires 1 Year From Approval
Date Unless Drilling Underway

²³ I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

Signature: *Sandra J. Moore*

Printed name: SANDRA J. MOORE

Title: REGULATORY COMPLIANCE ASSISTANT

Date: 3/4/02

Phone: 281/366-7183

OIL CONSERVATION DIVISION


Approved by: ORIGINAL SIGNED BY

Title: PAUL F. KAUTZ

Approval Date: PETROLEUM ENGINEER

Conditions: MAR 13 2002

Attached ☐



State of New Mexico

Energy, Minerals and Natural Resources Department

DISTRICT I

P.O. Box 1960, Hobbs, NM 88241-1960

DISTRICT II

P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III

1000 Rio Brazos Rd., Artec, NM 87410

DISTRICT IV

P.O. BOX 2088, SANTA FE, N.M. 87504-2088

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

Form C-102

Revised February 10, 1984

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-025-35853	Pool Code 29760	Pool Name Hardy (Tubb - Drinkard)
Property Code 29451	Property Name Mae F CURRY	Well Number 3
OGRID No. 000778	Operator Name BP America Production Company	Elevation 3490'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	7	21-S	37-E		660	NORTH	660	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 1 660' 660' 36.63 AC			
LOT 2 36.65 AC GEOGRAPHIC LOCATION NAD 27 Y= 547002.8 X= 846999.5 LAT. 32°29'55.63"N LONG 104°12'28.29"W			
LOT 3 36.67 AC			
LOT 4 36.69 AC			

OPERATOR CERTIFICATION

I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.

Amy T. Spang
Signature

Amy T. Spang
Printed Name

Regulatory Analyst
Title

3/4/02
Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

FEBRUARY 20, 2002


Date Surveyed

Signature & Seal of Professional Surveyor

Ronald J. Edson 2/22/02
02.11.0145

Certificate No. RONALD J. EDSON 3239
GARY EDSON 12641

VICINITY MAP

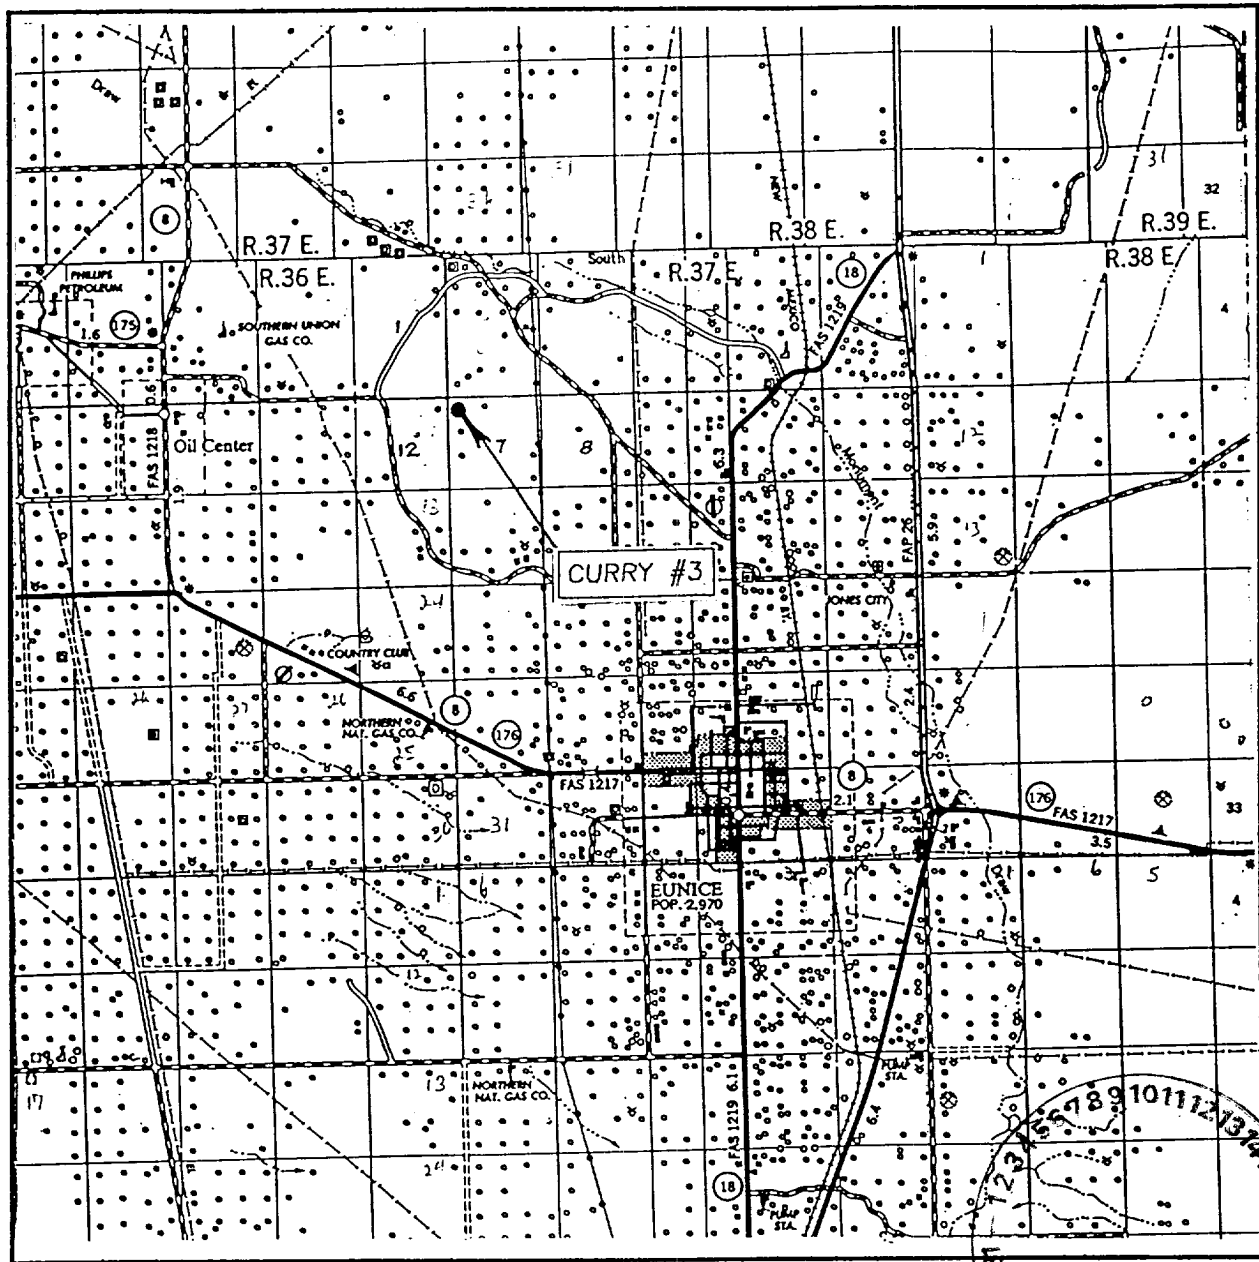

SCALE 1" = 2 MILES

SEC. 7 TWP. 21-S RGE. 37-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 660' FNL & 660' FWL

ELEVATION 3490'

OPERATOR BP dba ARCO PERMIAN

LEASE CURRY

JOHN WEST SURVEYING
HOBBS, NEW MEXICO
(505) 393-3117

This is a detailed topographic map of the Curry #3 area. The map features contour lines indicating elevation, with labels such as 3486, 3487, 3490, 3491, 3492, 3496, 3500, 3508, 3525, 3532, 3535, 3530, and 3527. A prominent dashed line runs horizontally across the middle of the map, labeled '3491' on the left and '3492' on the right. Another dashed line runs vertically through the center, labeled '3496' near the top and '3497' near the bottom. A solid line runs diagonally from the top left to the bottom right. A rectangular box labeled 'CURRY #3' is located in the lower-left quadrant. To the left of this box, a dashed line is labeled '3486'. In the upper-left quadrant, a dashed line is labeled '3497'. In the upper-right quadrant, a dashed line is labeled '3486'. In the lower-right quadrant, a dashed line is labeled '3487'. In the bottom right corner, there is a circular stamp with the number '10149' and the text '58180'.

EUNICE, N.M.

U.S.G.S. TOPOGRAPHIC MAP
EUNICE, N.M.


JOHN WEST SURVEYING
HOBBS, NEW MEXICO
(505) 393-3117

EXHIBIT 1


DRILLING OPERATIONS

CLASS -1: NORMAL PRESSURE < 10PPG

OPTION - 2: MMS STANDARD; SINGLE SIZE DRILL STRING

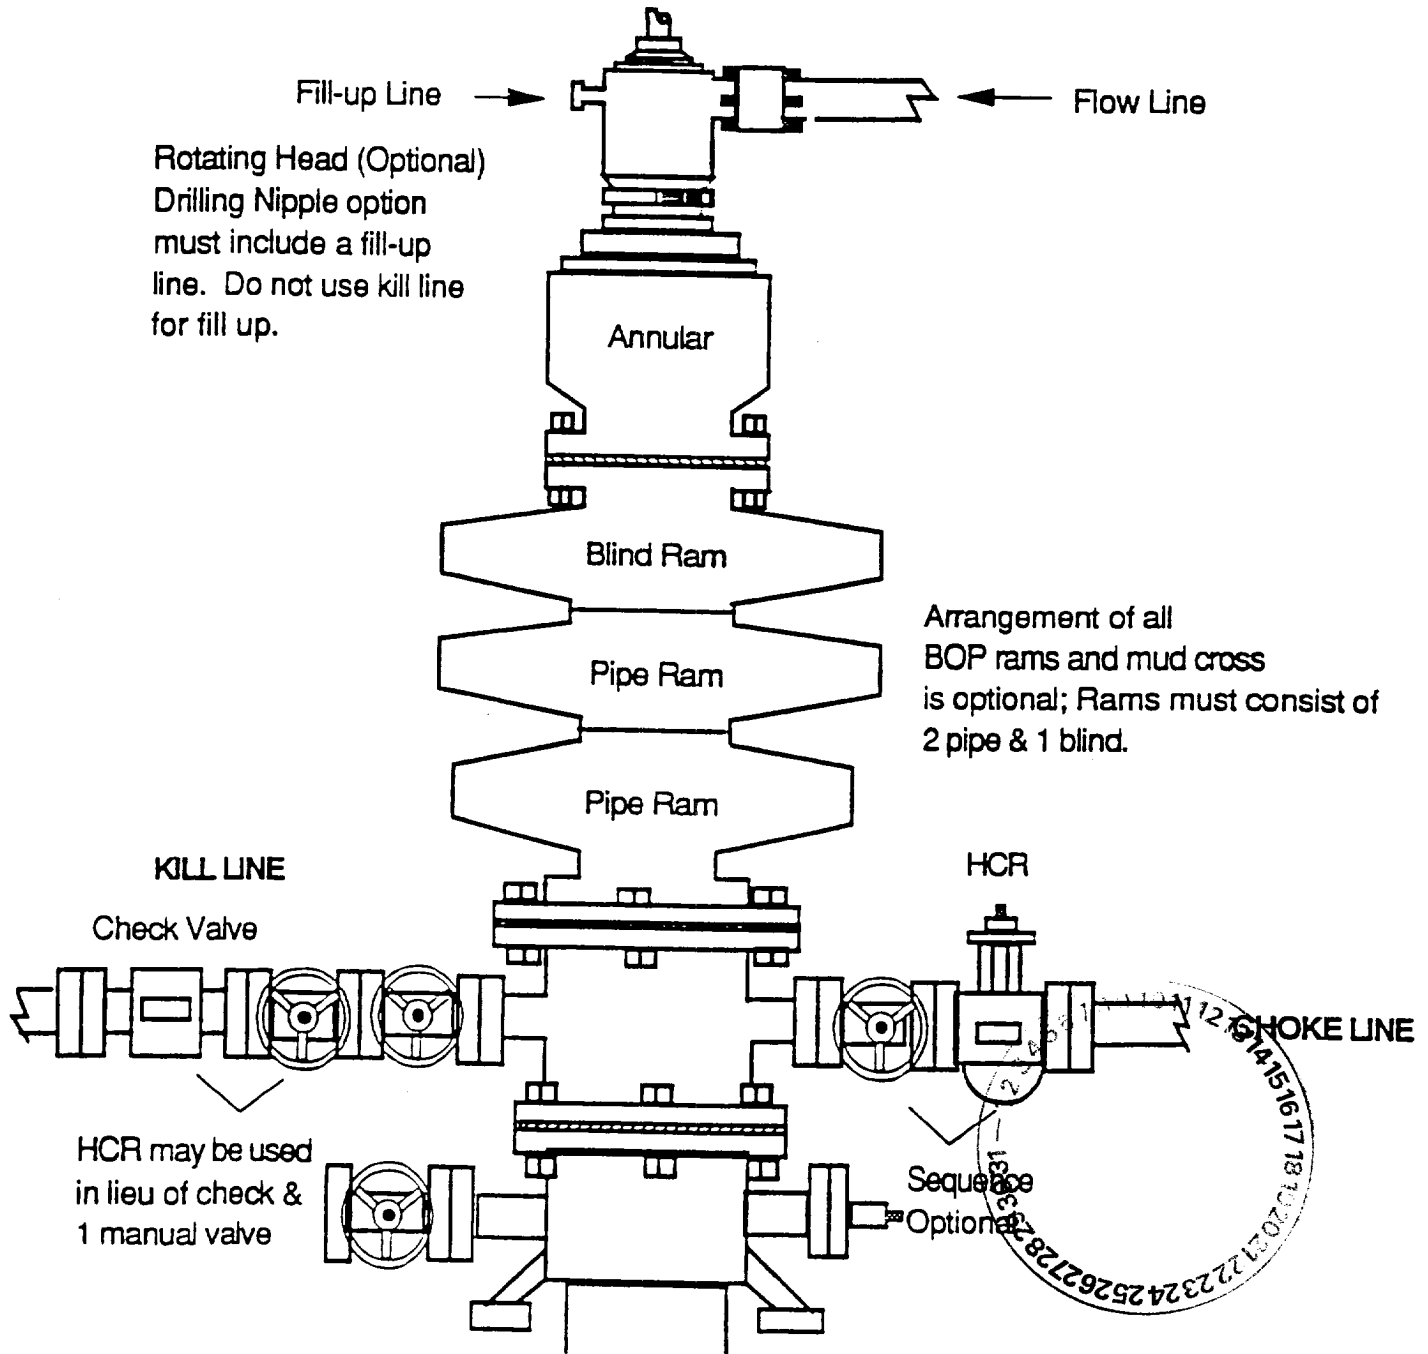

DRILLING OPERATIONS
CHOKE MANIFOLD
2M AND 3M SERVICE

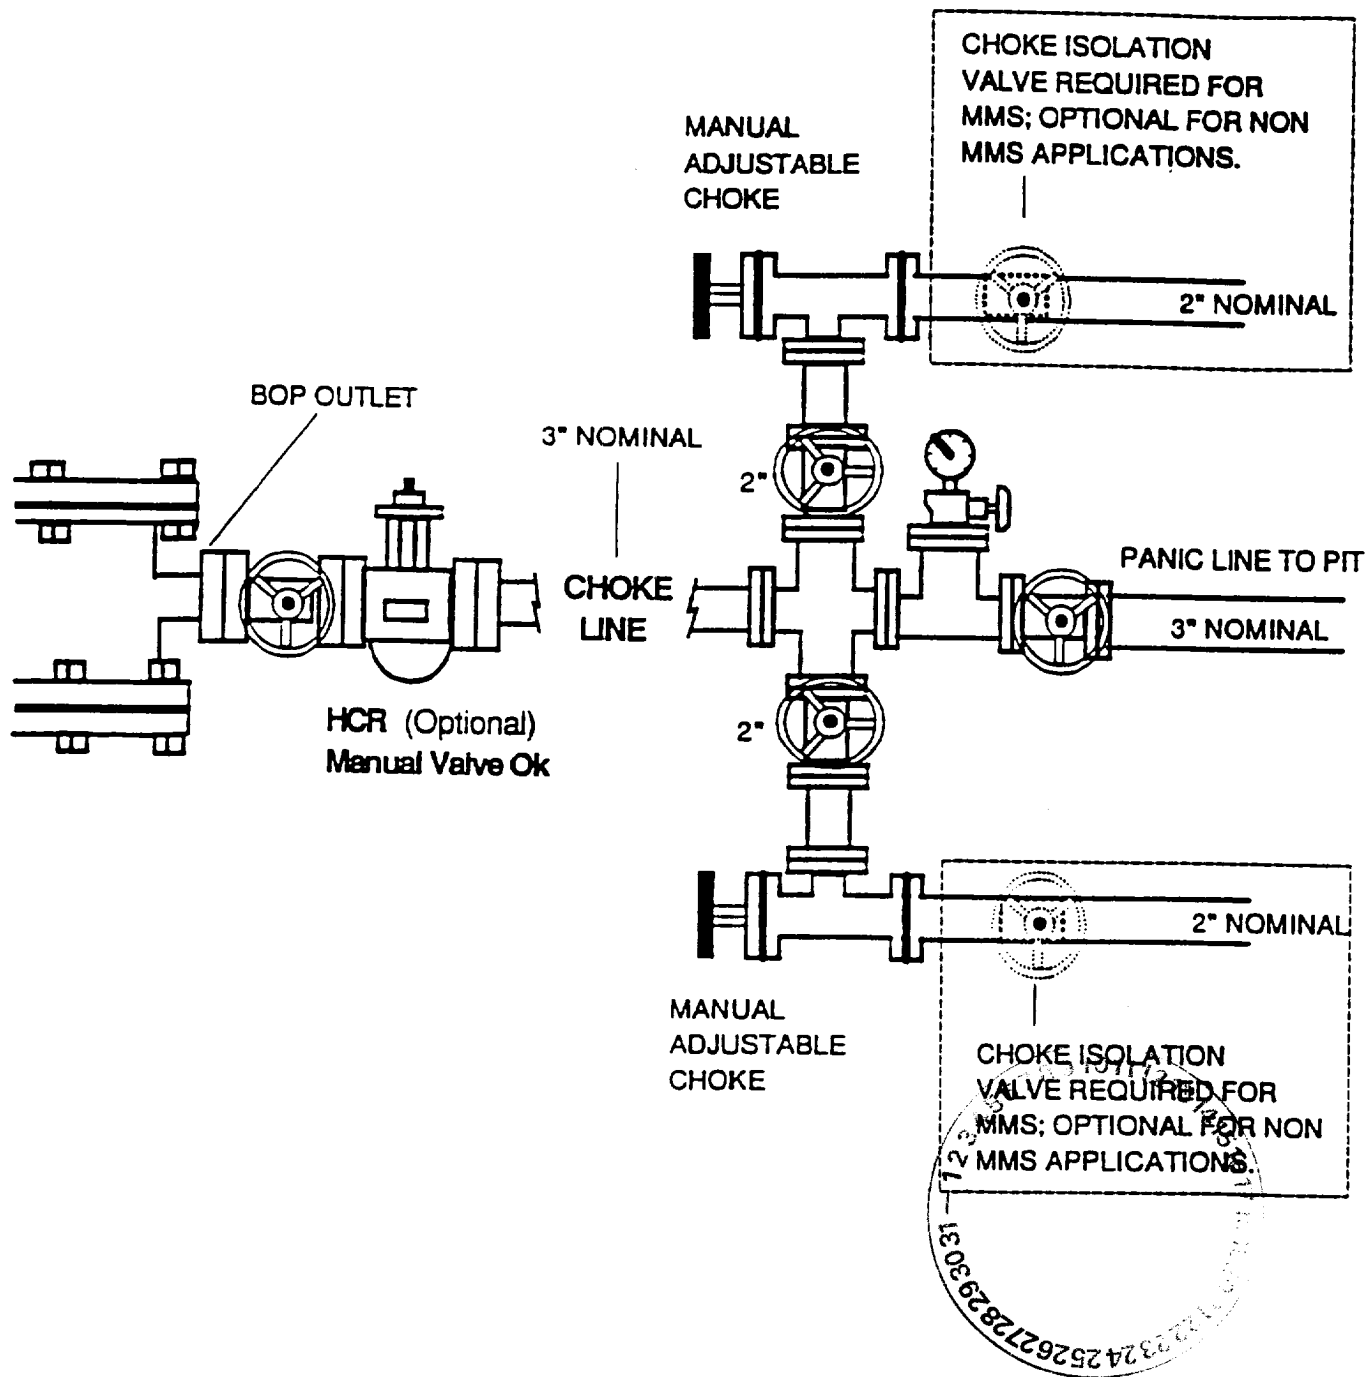

BLOWOUT PREVENTION EQUIPMENT SPECIFICATIONS

1. All BOP equipment shall be fluid and/or mechanically operated.
2. BOP's and all fittings will be in good working condition.
3. Equipment through which the bit must pass shall be at least as large as the casing size being drilled.
4. The nipple above the BOP shall be at least the same size as the last casing set.
5. The upper kelly cock with handle and lower kelly cock shall be rated at the BOP working pressure.
6. A floor safety valve (full opening) or drill string BOP with appropriate pressure ratings shall be available on the rig floor with connections or subs to fit any tool joint in the string.
7. The minimum size choke line shall be 3 inches nominal diameter, with a minimum size for vent lines downstream of chokes of 2 inches nominal, and vent lines which by-pass shall be a minimum of 3 inches nominal and as straight as possible.
8. All valves, fittings and lines between the closing unit and the blowout preventer stack should be of steel construction with rated working pressure at least equal to working pressure rating of the stack. Lines shall be bundled and protected from damage.
9. Minimum size for kill line is 2 inches nominal.
10. Ram type preventers shall be equipped with extension hand wheels or hydraulic locks.



ABOVE DATE DOES NOT
INDICATE WHEN
CONFIDENTIAL LOGS
WILL BE RELEASED

ELF

5/20/02