

DISTRICT I

P.O. Box 1980, Hobbs, NM 88240

DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

WELL API NO.	30-025-10261
5. Indicate Type of Lease	STATE ☐ FEE ☒
6. State Oil / Gas Lease No.	
7. Lease Name or Unit Agreement Name	HUGH
8. Well No.	5
9. Pool Name or Wildcat	BLNBRY(GAS)WANTZ ABO.WANTZ GRNT WSH

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO DIFFERENT RESERVOIR. USE "APPLICATION FOR PERM" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well:	OIL WELL ☐ GAS WELL ☐ OTHER ☐
2. Name of Operator	CHEVRON USA INC
3. Address of Operator	15 SMITH ROAD, MIDLAND, TX 79705
4. Well Location	Unit Letter <u>F</u> : <u>1980</u> Feet From The <u>NORTH</u> Line and <u>1980</u> Feet From The <u>WEST</u> Line Section <u>14</u> Township <u>22-S</u> Range <u>37-E</u> NMPM <u>LEA</u> COUNTY
10. Elevation (Show whether DF, RKB, RT,GR, etc.)	

11.

Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPERATION ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☒ ADDED PERFS WANTZ;ABO

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

THIS REPORT IS A RE-FILING OF A REPORT SENT IN BY JANICE RIPLEY ON 10-01-01, TO PROVIDE ADDITIONAL INFORMATION CONCERNING THE RBP.

8-06-01: MIRU. PULL RDS & TBG.

8-07-01: NDWH. NU BOP.

8-08-01: PUMP 35 BBLS KCL WTR TO KILL WELL. TIH W/BAILER & TAG FILL @ 6908'. 252' FILL. TIH TO 5285'.

8-09-01: C/O TO CIBP. HAD 5 BRIDGES. TAG CIBP @ 7168'. DRILL ON CIBP. MADE 1'. PUSH CIBP TO 7355'.

8-10-01: PERF 6602-06, 6702-24, 6920-24, 6929-33, 6997-7001, 7012-16, 7037-41 (6602-7041) TIH W/RBP & SET @ 7100'. PUH TO 6951'. SET PKR @ 6951'.

8-13-01: ACIDIZE PERFS 6697-7041' W/12,000 GALS START ACID. DROP 4 BALLS. ACIDIZE 6920-33' W/800 GALS START ACID. 6780-6880 W/1200 GALS START ACID, 6702-24' W/2000 GALS START ACID, & 6602-06' W/400 GALS START ACID. MOVE RBP TO 7100' & PKR TO 6650'. RU SWAB.

8-14-01: REL PKR. RUN DN HLE & ENGAGE RBP. REL RBP & TOH.

8-15-01: TIH W/RBP & PKR. SET RBP @ 7100' & PKR @ 6650'. RU SWAB.

8-21-01: REL PKR. RUN DN HLE. ENGAGE RBP & REL RBP. LD PKR & RBP. RUN PROD EQPT.

8-22-01: TIH W/TBG. NDBOP. NUWH. RUN PMP & RDS. SPACE WELL OUT. HANG ON. TEST TBG & PMP ACTION. RIG DOWN.

FINAL REPORT

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Denise Leake TITLE Regulatory Specialist

DATE 3/20/2003

TYPE OR PRINT NAME Denise Leake

Telephone No. 915-687-7375

(This space for State Use)

ORIGINAL SIGNED BY

GARY W. WINK

APPROVED

OC FIELD REPRESENTATIVE/STAFF MANAGER

CONDITIONS OF APPROVAL, IF ANY:

DATE

MAR 25 2003

Submit 3 Copies to Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
811 South First, Artesia, NM 87210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-10
Revised March 25, 199

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

WELL API NO.
30-025-10261
5. Indicate Type of Lease
STATE ☐ FEE ☒
6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☐ Gas Well ☐ Other ☒

2. Name of Operator
Chevron U.S.A. Inc.

3. Address of Operator
P.O. Box 1150, Midland, TX 79702

4. Well Location
Unit Letter F : 1980 feet from the NORTH line and 1980 feet from the WEST line

Section 14 Township 22S Range 37E NMPM County LEA

7. Lease Name or Unit Agreement Name:

HUGH

8. Well No.

5

9. Pool name or Wildcat
BLINEERY (GAS)/WANTZ; ABO

Granite Wash

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER:

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐


OTHER: ADDED PERFS WANTZ; ABO

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

POH W/PROD EQPT. RAN BAILER, TAGGED FILL 6908'. CLEANED OUT - DO/PUSHED CTRP TO 7355'. PERFD 6602'-7041' W/2 JHPF. SET REP @ 7100'. ACZD W/16,000 GALS 15% & RCNB'S. SWABBED. RTH W/TBG, RCDS & PUMP. RETURNED WELL TO PRODUCTION. REP WILL BE LEFT @ 7100' UNTIL APPROVAL TO IHC BLINEERY, WANTZ; ABO & WANTZ; GRANITE WASH IS RECEIVED.

WORK PERFORMED 8/6/01 - 8/22/01

parted out of the well

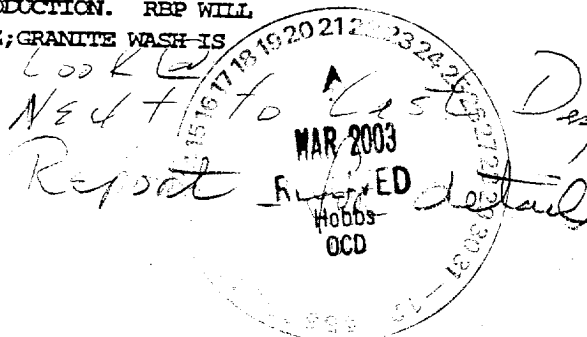

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE J. K. Ripley TITLE REGULATORY O.A. DATE 10/1/01

Type or print name J. K. RIPLEY

Telephone No. (915) 687-7148

(This space for State use)

APPROVED BY PAUL H. HARTZ TITLE DEPUTY COMMISSIONER DATE OCT 11 2001

Conditions of approval, if any:

Well: Hugh # 5

Field: Blinbry
Wantz (DHC)

Granite Wash

Location:

1980' FNL & 1980' FWL
Section: 14
Township: 22S
Range: 37E
County: Lea State: NM

Proposed
Wellbore Diagram

Well ID Info:

Chevron: FB1257
API No: 30-025-10251
LS/L6: U462100 & U523000
Spud Date: 2/7/48
Compl. Date: 3/4/46

Surf. Csg: 13 3/8", 36# & 48#, National SS
Set: @ 315' w/ 300 sks
Hole Size: 17 1/4"
Circ: Yes TOC: Surface
TOC By: Circulated

Interm. Csg: 9 5/8", 36#, J-55
Set: @ 2875' w/ 1300 sks
Hole Size: 12 1/4"
Circ: No TOC: 1090'
TOC By: Temperature Survey

Elevations:

GL: 3352'
KB: 3366'
DF: 3365'

Tbg Detail:

BP @ 7335'
1 jt. 2 3/8" tbg
2 3/8" x 4' perf sub
SN @ 7300'
64 jts. 2 3/8" EUE 8R J-55 tbg
TAC @ 5300'
171 jts. 2 3/8" EUE 8R J-55 tbg

Block Sqz Perfs @ 6100'

Perfs:			Status
5388'	5508'	5618'	Blinbry - Open
5390'	5510'	5620'	Blinbry - Open
5396'	5512'	5624'	Blinbry - Open
5400'	5520'	5628'	Blinbry - Open
5404'	5522'	5638'	Blinbry - Open
5406'	5524'	5640'	Blinbry - Open
5410'	5526'	5662'	Blinbry - Open
5418'	5536'	5664'	Blinbry - Open
5420'	5540'	5670'	Blinbry - Open
5422'	5544'	5672'	Blinbry - Open
5424'	5548'	5692'	Blinbry - Open
5434'	5552'	5694'	Blinbry - Open
5436'	5556'	5710'	Blinbry - Open
5438'	5560'	5712'	Blinbry - Open
5450'	5574'	5762'	Blinbry - Open
5452'	5578'	5764'	Blinbry - Open
5454'	5582'	5772'	Blinbry - Open
5458'	5586'	5774'	Blinbry - Open
5486'	5602'	5782'	Blinbry - Open
5490'	5604'	5784'	Blinbry - Open
5494'	5608'	5792'	Blinbry - Open
5498'	5610'	5794'	Blinbry - Open

6216-18' Drnkard - Cmtd Behind Liner
6254-56' Drnkard - Cmtd Behind Liner
6292-94' Drnkard - Cmtd Behind Liner
6328-30' Drnkard - Cmtd Behind Liner
6369-70' Drnkard - Cmtd Behind Liner

Prod. Csg: 7", 23#, J-55
Set: @ 6400' w/ 700 sks
Hole Size: 8 3/4"
Circ: No TOC: 2300'
TOC By: Temperature Survey

6602-06' Abo - Open
6702-24' Abo - Open
6780-82' Abo - Open
6798-6800' Abo - Open
6823-25' Abo - Open
6840-42' Abo - Open
6878-80' Abo - Open
6920-24' Abo - Open
6929-33' Abo - Open
6997-7001' Abo - Open
7012-16' Abo - Open
7037-41' Abo - Open

7174-77' Granite Wash - Open
7189-92' Granite Wash - Open
7202-05' Granite Wash - Open
7219-22' Granite Wash - Open
7256-59' Granite Wash - Open
7291-94' Granite Wash - Open

Liner: 4 1/2" OD 11.6# K-55
Set: @ 7420' w/ top @ surface
Hole Size: 6 1/4"
Circ: No TOC: 6200' (Cmtd to surface w/ 600 sks 6/98)
TOC By: Temperature Survey

COTD: 7388' **7355**
PBD: 7388'
TD: 7420'

Updated: 7/5/01

By: A. M. Howell

*Needs
C-103
Re Drilled to
add GRANITE Wash*

MAR 2003
RECEIVED