

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO. 30025-24618
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. 8910115860

7. Lease Name or Unit Agreement Name South Eunice Unit
8. Well No. 64
9. Pool name or Wildcat Eunice 7 Rvrs Qn So.

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: OIL WELL ☐ GAS WELL ☐ OTHER ☒ Injector	
2. Name of Operator Conoco Inc.	
3. Address of Operator 10 Desta Dr., Ste 100W, Midland, Tx 79705	
4. Well Location Unit Letter <u>A</u> : <u>660</u> Feet From The <u>North</u> Line and <u>660</u> Feet From The <u>East</u> Line Section <u>33</u> Township <u>22S</u> Range <u>36E</u> NMPM <u>Lea</u> County	
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3475	

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
OTHER: ☐	PLUG AND ABANDONMENT ☐
	CASING TEST AND CEMENT JOB ☐
	OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

It is proposed to plug and abandon the S. Eunice Unit No. 64 as follows:

1. Set CIBP @ 3550' w/25 sx cmt on top
2. Pump 25 sx cmt @ 3173' at top of Yates/7 Rivers.
3. Pump 25 sx cmt @ 1437' at top of salt section.
4. Perf @ 475' (csg shoe) w/4 JSPF.
5. Pump 100 sx cmt @ 475' to surface.
6. Erect P&A marker.

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Jerry W. Hoover TITLE Sr. Conservation Coord DATE 1-12-93
(915)
TYPE OR PRINT NAME Jerry W. Hoover TELEPHONE NO. 686-5400

(This space for State Use)
ORIGINAL SIGNED BY JERRY SEXTON
DISTRICT I SUPERVISOR

JAN 15 1993

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

CURRENT WELLBORE DIAGRAM SOUTH EUNICE UNIT 64

GLE: 3475'

KBE: 3484'

SURFACE CASING

7 5/8", 24#, @ 417'

CIRC w/ 175 sx

Top Salt: 1437'

Base Salt: 3005'

Yates 3173'

7 Rivers: 3370'

Queen: 3755'

TUBING

2-3/8", 112 JTS, PL COAT

w/ Baker Model AD-1 PKR @ 3536'

PRODUCTION CASING

4-1/2", 10.5, @ 3860'

TOC @ 2750' (TS)

QUEEN PERFS


3611-3758'

PBTD: 3830'

TD: 3860'

BY: S.D. Listiak

DATE: 11-18-92

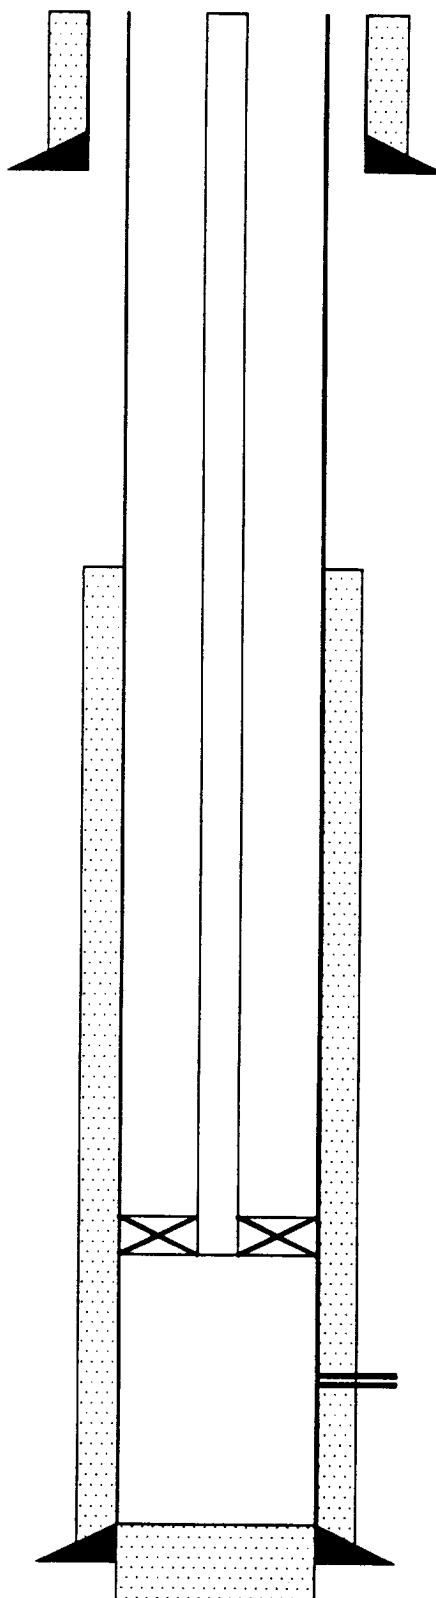

PROPOSED WELLBORE DIAGRAM SOUTH EUNICE UNIT 64

GLE: 3475'

KBE: 3484'

SURFACE CASING

7 5/8", 24#, @ 417'
CIRC w/ 175 sx

SURFACE/SHOE PLUG

100 SX @ 475' TO SURF.

Top Salt: 1437'
Base Salt: 3005'
Yates 3173'
7 Rivers: 3370'
Queen: 3755'

SALT SECTION

25 SX @ 1437'

TUBING

2-3/8", 112 JTS, PL COAT
w/ Baker Model AD-1 PKR @ 3536'

YATES/SEVEN RIVERS

25 SX @ 3173'

PRODUCTION CASING

4-1/2", 10.5, @ 3860'
TOC @ 2750' (TS)

QUEEN PLUG

CIBP @ 3550' W/ 25 SX CMT

QUEEN PERFS

3611-3758'

PBTD: 3830'

TD: 3860'

BY: S.D. Listiak

DATE: 11-18-92

