

District I
PO Box 1980, Hobbs, NM 88241-1980

District II
811 South First, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

Form C-101
Revised October 18, 1994

Instructions on back
Submit to Appropriate District Office
State Lease - 6 Copies
Fee Lease - 5 Copies

☐ AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

¹ Operator Name and Address John H. Hendrix Corporation P. O. Box 3040 Midland, Texas 79702-3040		² OGRID Number 012024
		³ API Number 30 - 0 25-34084
⁴ Property Code 005133	⁵ Property Name Boyd	⁶ Well No. 8

Surface Location

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West Line	County
G	23	22 S	37 E		1980	North	2310	East	Lea

⁸Proposed Bottom Hole Location If Different From Surface

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West Line	County
⁹ Proposed Pool 1 Blinebry Oil & Gas (06660)					¹⁰ Proposed Pool 2				

¹¹ Work Type Code N	¹² Well Type Code O	¹³ Cable/Rotary R	¹⁴ Lease Type Code P	¹⁵ Ground Level Elevation 3325
¹⁶ Multiple No	¹⁷ Proposed Depth 6800	¹⁸ Formation Blinebry	¹⁹ Contractor McGee	²⁰ Spud Date 01-15-98

²¹Proposed Casing and Cement Program

Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
11	8 5/8	24#	1250	450	Surface
7 7/8	5 1/2	17# & 15.5#	6800	1900	Circ.

²²Describe the proposed program. If this application is to DEEPEN or PLUG BACK give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.

1. Drill 11" hole and set 8-5/8" casing at 1250' and cement surface string.
2. Continue drilling 7-7/8" hole to approximately 6800', log and set casing at 6800' and cement.
3. Perforate selected interval from log in the Blinebry and stimulate.

²³I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

Signature: *Ronnie H. Westbrook*

Printed name: Ronnie H. Westbrook

Title: Vice President

OIL CONSERVATION DIVISION

Approved By: ORIGINAL SIGNED BY CHRIS WILLIAMS

Title: DISTRICT MANAGER

Approval Date: **AUG 06 1997**

Expiration Date:

DISTRICT I
P.O. Box 1980, Hobbs, NM 88241-1980

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
P.O. Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-34084	Pool Code 06660	Pool Name Blinebry Oil & Gas
Property Code 005133	Property Name BOYD	Well Number 8
OGRID No. 012024	Operator Name JOHN H. HENDRIX CORPORATION	Elevation 3325

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	23	22 S	37 E		1980	NORTH	2310	EAST	LEA


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						

ALL ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief. <i>Ronnie H. Westbrook</i> Signature Ronnie H. Westbrook Printed Name Vice President Title Aug. 1, 1997 Date	
	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. JUNE 25, 1997 Date Surveyed Signature and Seal of Professional Surveyor <i>Ronald J. Eidson</i> W.B. Num. 97-11-4048 Certification No. JOHN H. WEST, 676 RONALD J. EIDSON, 3239 RONALD J. EIDSON, 12641	

LOCATION VERIFICATION MAP

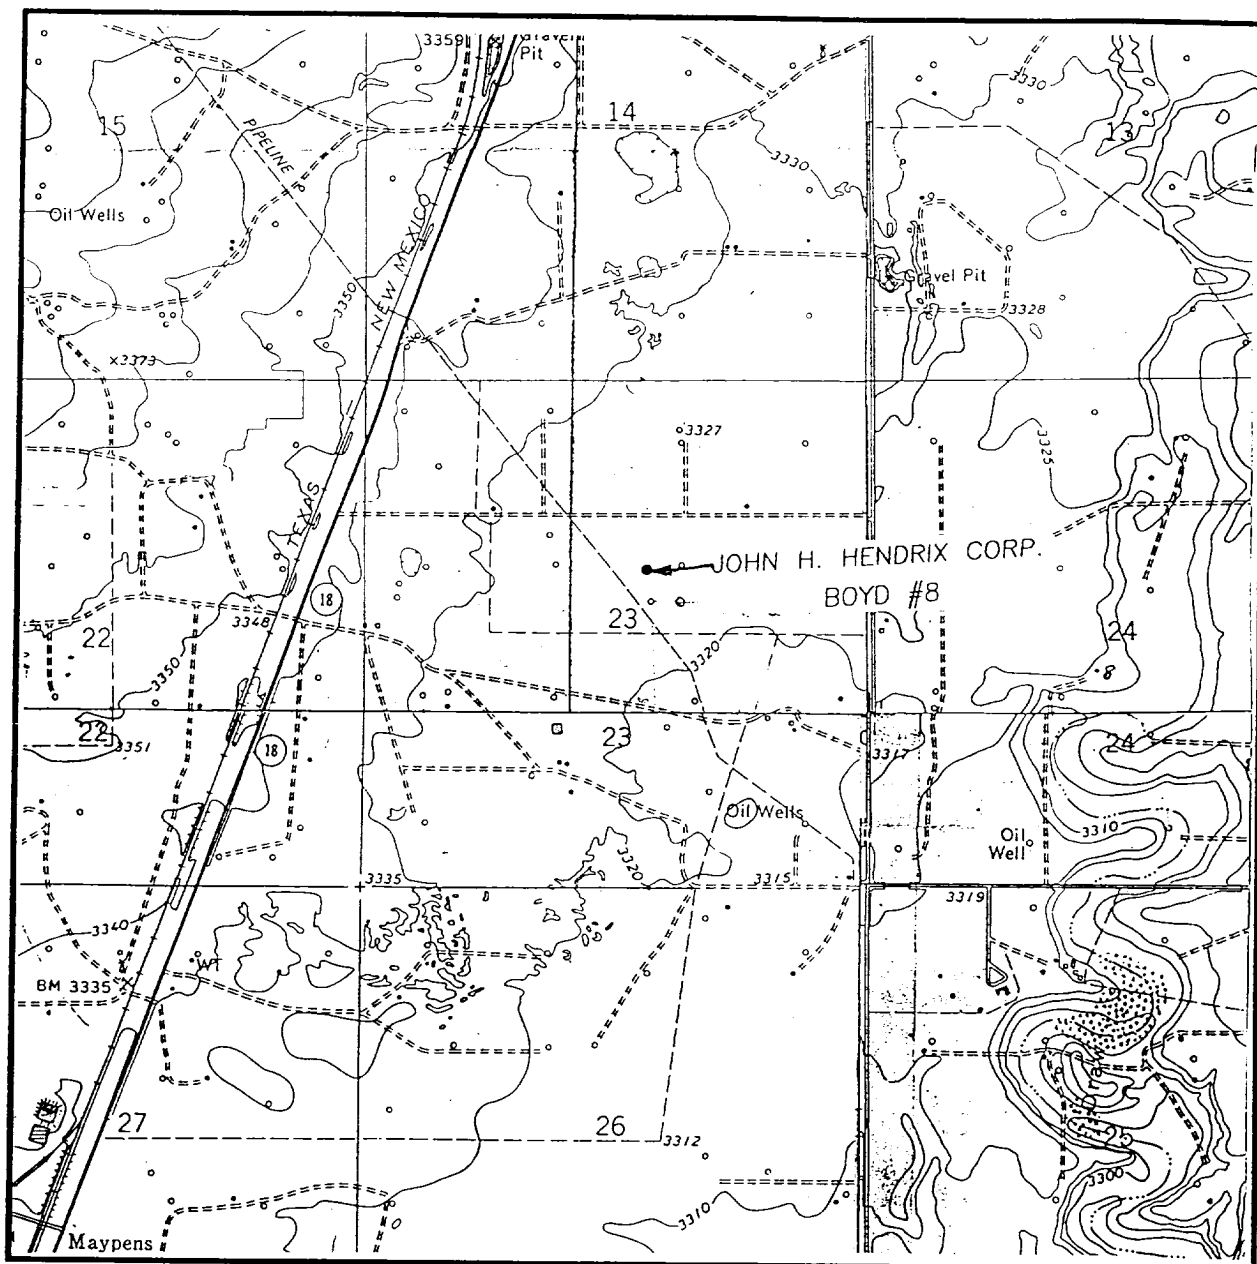

SCALE: 1" = 2000'

CONTOUR INTERVAL - 10'

SEC. 23 TWP. 22-S RGE. 37-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 1980' FNL & 2310 FEL

ELEVATION 3325'

OPERATOR JOHN H. HENDRIX CORP.

LEASE BOYD

U.S.G.S. TOPOGRAPHIC MAP


EUNICE, N.M.

**JOHN WEST ENGINEERING
HOBBS, NEW MEXICO**

(505) 393-3117

1 2 3 4 5 6 7 8 9 10 11 12
A
100 103
Renowned
Hubbs
Oct

VICINITY MAP

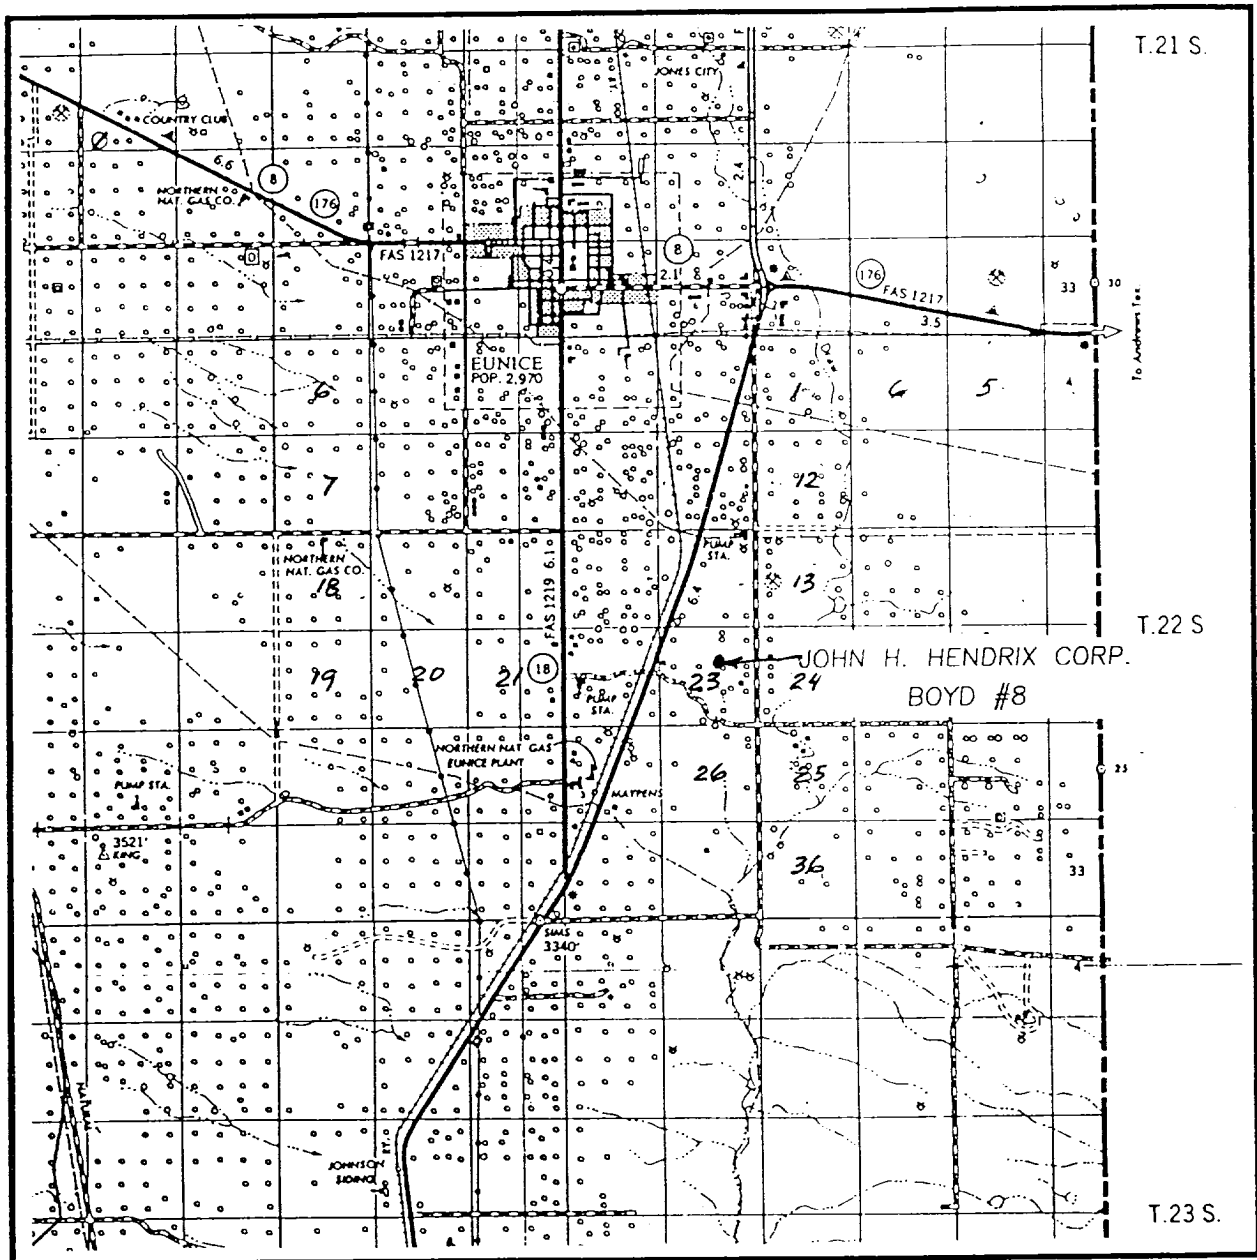

SCALE: 1" = 2 MILES

SEC. 23 TWP. 22-S RGE. 37-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 1980' FNL & 2310 FEL

ELEVATION 3325'

OPERATOR JOHN H. HENDRIX CORP.

LEASE BOYD

JOHN WEST ENGINEERING
HOBBS, NEW MEXICO
(505) 393-3117



MINIMUM BLOWOUT PREVENTER REQUIREMENTS

3,000 psi Working Pressure

3 MWBP

STACK REQUIREMENTS

No	Item	Min I.D.	Min. Nominal
1	Flowline		
2	Fill up line		2"
3	Drilling nipple		
4	Annular preventer		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min choke line outlets		
6b	2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above.)		
7	Valve Gate ☐ Plug ☐	3-1/8"	
8	Gate valve—power operated	3-1/8"	
9	Line to choke manifold		3"
10	Valves Gate ☐ Plug ☐	2-1/16"	
11	Check valve	2-1/16"	
12	Casing head		
13	Valve Gate ☐ Plug ☐	1-13/16"	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

OPTIONAL

16	Flanged valve	1-13/16"	
----	---------------	----------	--

CONFIGURATION 1

