


COPY TO O. C. W.

Form 9-331a
(Feb. 1951)Budget Bureau No. 42-R358.4.
Approval expires 12-31-60.

HOBBS (SUBMIT IN TRIPLICATE)

Land Office **Las Cruces**Lease No. **032432-4**

Unit _____

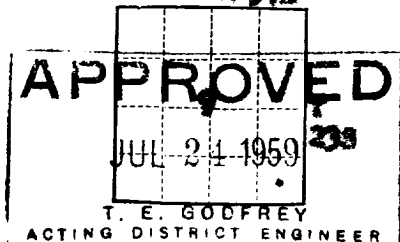

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 24, 1959, 19

Well No. **8** is located **660** ft. from **SW** line and **660** ft. from **E** line of sec. **9**
SE **SW** **9** **233** **37E** **N54W**
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Langlo-Atlix **Lee** **New Mexico**
 (Field) (County or Subdivision) (State or Territory)

The elevation of the **Ground Level** **1293.5** ft.
~~1293.5~~

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Plan to rotary drill a 11 1/2" hole and set 8-5/8", 24' casing at 375' and cement to surface. The well will then be rotary drilled to estimated depth of 3700' with a 6-3/4" hole and set 4 1/2" 9.5' oil string casing at total depth. The oil string will be cemented with 250 sack in the Halliburton manner, and then cemented with 150 sack through a stage tool set at approximately 1125' to isolate the Santa Rosa water zone from Salt Section. Top of Salt estimated 1150', top Queen estimated 3475'.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **Samson Oil Corporation**

Address **Box 2137**

Hobbs, New Mexico

By *[Signature]*

Title **District Superintendent**