

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
1625 N. French Dr.
Hobbs, NM 88240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993
Case Designation and Serial No.
LC 0301 80 B

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☐ Oil Well ☐ Gas Well ☒ Other SWD

2. Name of Operator
SOUTHWEST ROYALTIES, INC.

3. Address and Telephone No.
P.O. BOX 11390; MIDLAND, TEXAS

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
660' FSL & 660' FWL, SEC 7, T26S, R37E

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.
FARNSWORTH B #1

9. API Well No.
30 025-21302-11964

10. Field and Pool, or Exploratory Area
SCARBOROUGH (YATES/7 RIVERS)

11. County or Parish, State
LEA COUNTY, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*
WELL FAILED MIT.

WE PROPOSE TO P&A THE WELL AS FOLLOWS:

- 1) SET CIBP @ + 2,950' & CAP W/35' OF CMT. — TAG
- 2) LOAD HOLE W/9 PPG MUD.
- 3) SPOT 13 SX CMT PLUG FROM 2470-2600'. TAG PLUG.
- 4) SPOT 13 SX CMT PLUG FROM 1500-1630'. TAG PLUG.
- 5) PERF 5-1/2" @ 370'. PUMP 68 SX CMT - FILL CSG TO SURF + 30 SX OUTSIDE 5-1/2" CUT OFF WH. SPOT 10 SX SURF PLUG.
- 6) ERECT P&A MARKER, COVER PITS & CLEAN LOCATION.

14. I hereby certify that the foregoing is true and correct.

Signed 
(This space for Federal or State office use)

Title AREA SUPERVISOR

Date 03/27/01

Approved (ORIG. SGD.) GARY GOURLEY
Conditions of approval, if any:

Title PETROLEUM ENGINEER

Date

RECEIVED

171819202122232425

SOUTHWEST ROYALTIES


PROJECT Farnsworth "B" No 1 SW D
Formerly "B" No 9

PAGE 1 OF
 BY CM B DATE 3/26/01

EL 2969'
 KB 9.5'

AP# 30-025-21302
 660' FSL & 1660' FWL
 Utl Sec 7, T26S, R37E

Spud led 10/14/65
 (Cactus Drly Co for Pen Am)

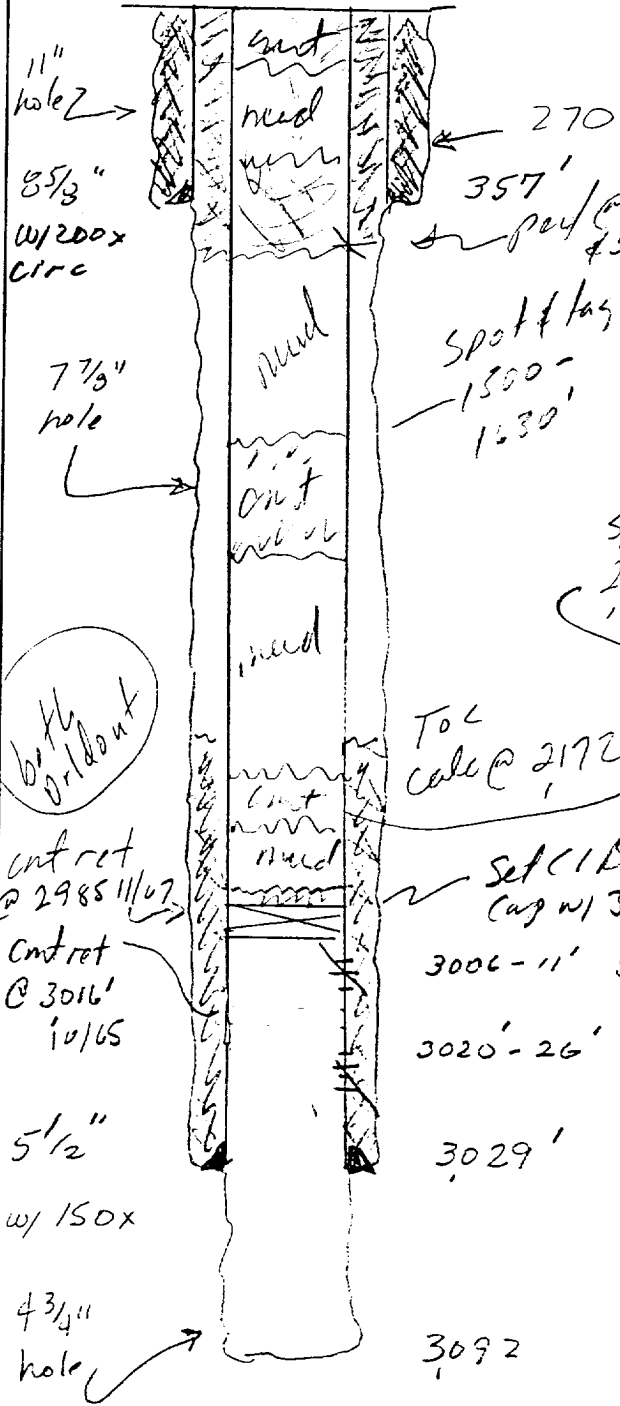

270
 357'
 370'
 1500'
 1530'

10/20/65 - Perf 3020'-26' AW/ 500 gals. Set Ret @ 3016' & 500' w/ 150x
 11/29/65 Perf 3006-11' AW/ 200 gals - TA'd Set cmt Ret @ 2985' & 500' 3006-11 w/ 150x
 DO to 3092' Note: Drilled out 2 cmt retainers.

To c cmt @ 2172'

Set CIDP @ 2980'
 cap w/ 35' cmt
 3006-11' 500 gals w/ 150x
 3020'-26' 500 gals w/ 150x
 3029'

3092'

BUREAU OF LAND MGMT.
ROSWELL OFFICE

2001 MAR 28 AM 8:44

RECEIVED

