


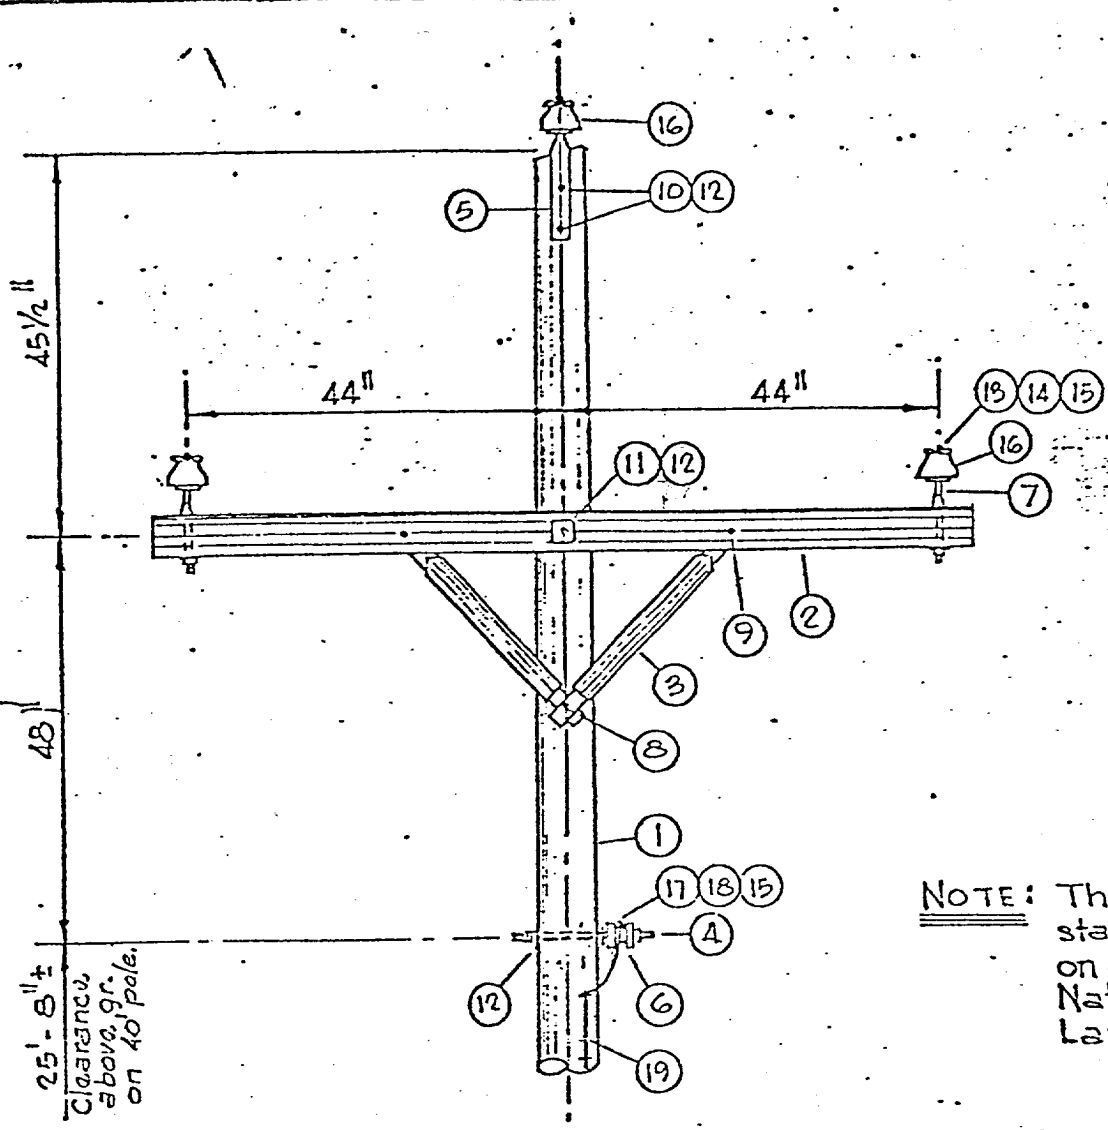

NOTE: This construction standard to be used on all lines built on National Resource Lands.

MATERIAL

ITEM	REQD.	DESCRIPTION	ITEM	REQD.	DESCRIPTION
1	1	Pole, 40'	17	—	Neutral Conductor
2	1	Crossarm, 5 1/2" x 4 1/2" x 8'	18	1	Armor Rod
3	2	Brace, Wood	19	5#	Pole Ground Wire, #6 Cu.
4	1	Stud Rack			
5	1	Ridge Pin, 15"			
6	1	Spool Insulator			
7	2	Steel Pin, 5/8" x 5"			
8	1	Lsq Screw, 1/2" x 4"			
9	2	Carrage Bolt, 3/8" x 4 1/2"			
10	2	Machine Bolt, 5/8" x 10"			
11	1	Machine Bolt, 5/8" x 14"			
12	5	Washer, 2 1/2" Sq.			
13	—	Phase Conductor			
14	3	Armor Rod			
15	1#	Tie Wire, #6 Al.			
16	3	Pin Insulator, 9KV			

NOTE: All bolts will have locknuts.

REVISIONS		DATE: 4-22-77	TITLE: PRIMARY IN LINE POLE 12.500 11/1/77 ACSR
DESCRIPTION	DATE BY		
DRAWN BY:			

RECEIVED

APR 2 1977
OIL CONSERVATION COM. HOBBS, N. M.