


NOTE: TESTING PROCEDURES FOR BLOW-OUT PREVENTER

1. After blow-out preventer is installed blind rams are to be tested for 15 minutes at 1000.000 to insure there safety.
2. When get in hole pipe rams are tested for 15 minutes 1000.000.
3. Henceforth after each trip in hole both blind rams and pipe rams are tested as per above.

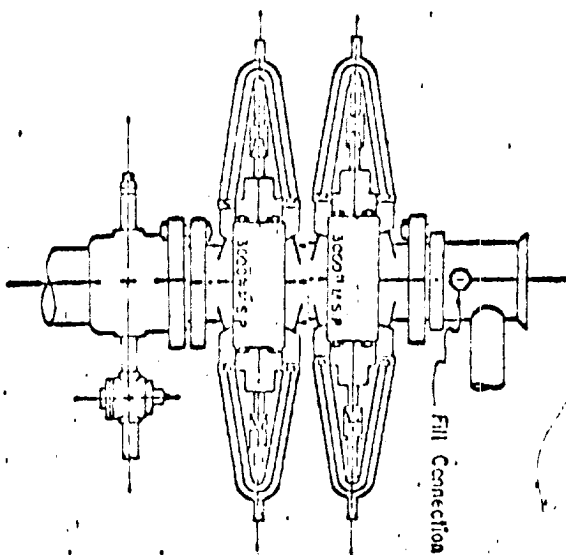

Shafter Type E Series 900
Hydraulic B.O.P.

3,000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOK-UP

Series 900 Flanges, or Better

CAMPBELL & HENDRICK

Elliot Well No. 2

Wellsite Layout

EXHIBIT "B"