


BLOWOUT PREVENTER SPECIFICATION

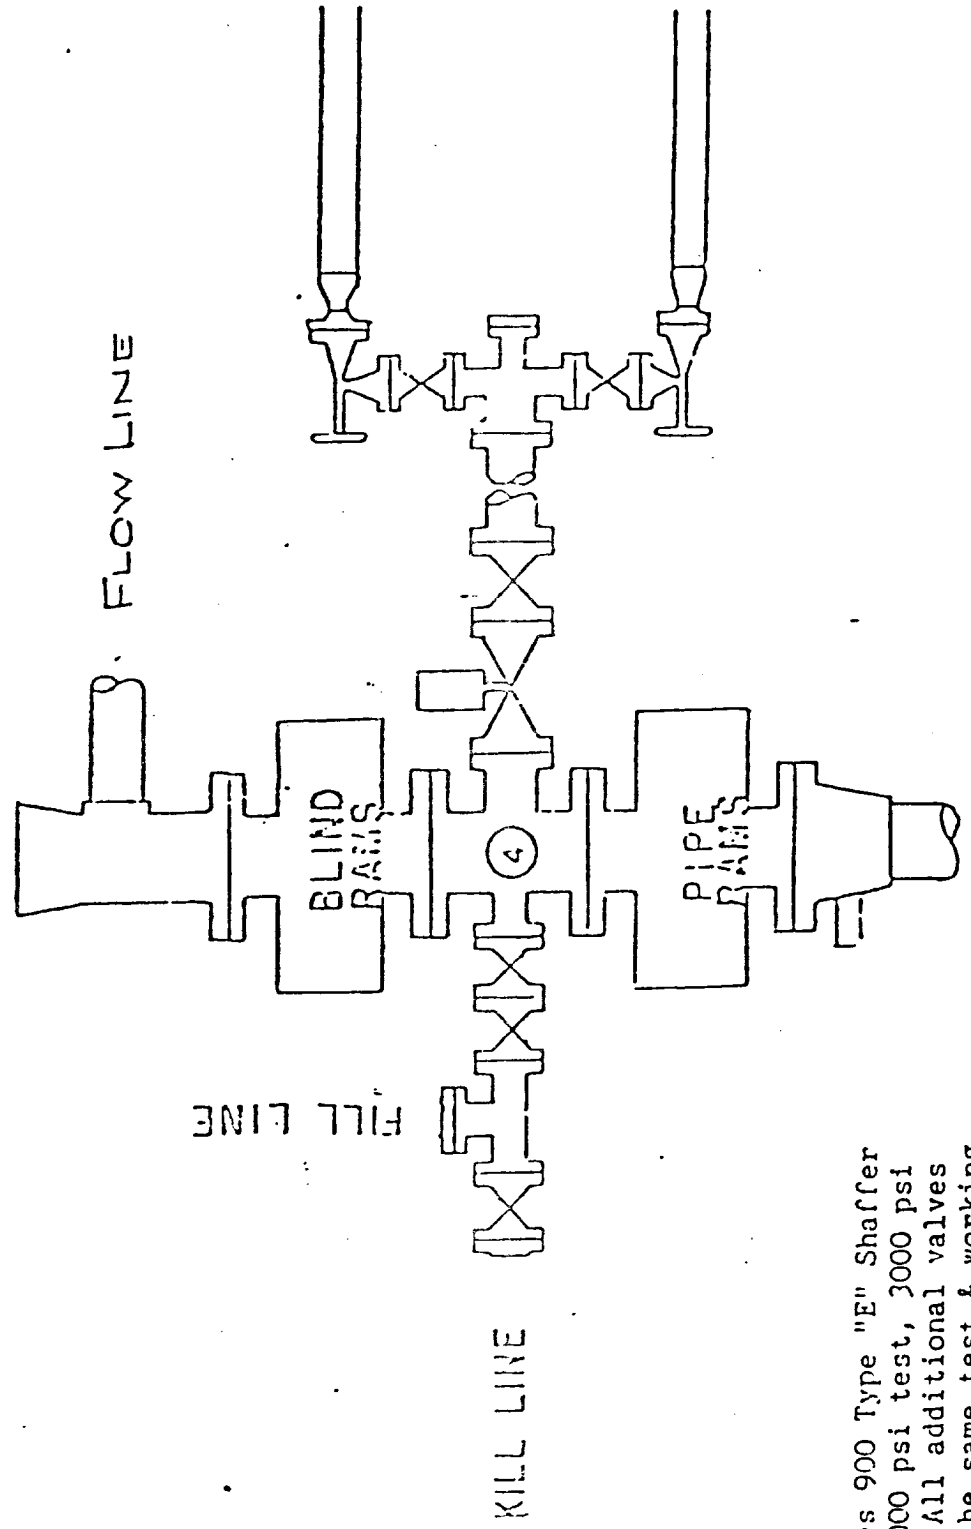

BOP's are 10" Series 900 Type "E" Shaffer Double Hydraulic 6000 psi test, 3000 psi working pressure. All additional valves & connections are the same test & working pressures.

RECEIVED

NOV 22 1985

O.C.D.
HOBBS OFFICE