submitted in lieu of Form 3160-5

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

Sundry Not	ices and Reports o	n Wells	•		
		The second of th	5.	Lease Number	
1. Type of Well GAS			6.	If Indian, All. Tribe Name	. or
		DECEN	7.	Unit Agreement	Name
2. Name of Operator	्री: ध				
RESOURCES OIL	& GAS COMPANY	0011 - 7 15	199		
	(0)	IIL COM, I	DIV.	Well Name & Nur	
3. Address & Phone No. of Operation		া) বিশ্ব	_	Howell G Com #3	300
PO Box 4289, Farmington, NM	87499 (505) 326-	9700 - 1010 9	9.	API Well No.	
4. Location of Well, Footage, So			10	30-045-26913 Field and Pool	
1430'FNL, 1090'FWL, Sec.6, T-30-N, R-8-W, NMPM			10.	Basin Fruitland	d Coal
. , , ,	,		11.	County and Stat	
F				San Juan County	y, NM
Subsequent Report Final Abandonment	Plugging Bac Casing Repai Altering Cas X Other - Pump	r Water ing Conve	Shut of rsion to	Fracturing ff o Injection	
13. Describe Proposed or Comp	leted Operations				
It is intended to install procedure and wellbore dia	agram.		ording	to the attached 99 JUN -1 PM 1: 42	RECEIVED BLM
14. I hereby certify that the Signed Signed	_		<u>rator</u> D	ate 5/27/99 rc	
(This space for Federal or State APPROVED BY /S/ Duane W. Spen CONDITION OF APPROVAL, if any:		d. Petroleum Mer ogem	Date _	JUN - 2 60%	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Howell G Com #300

PUMPING UNIT INSTALLATION PROCEDURE 5/25/99

<u>Unit F, Section 6, T30N-R8W, San Juan County, New Mexico</u> <u>Lat. 36.843280 / 36° 50.60'</u> Long. 107.718860 / 107° 43.13'

- 1. MIRU pulling unit.
- 2. NDWH / NU BOP. Kill if necessary with produced Fruitland coal water.
- 3. PU one joint of tubing and TIH to tag for fill.
- 4. TOH laying down 2-7/8" tubing (tbg is set @ 2808'. There are 90 joints of 2-7/8" 6.5# J-55 and an "F" nipple @ 2776').
- 5. PU 2-3/8" 4.7# J-55 EUE tubing with a 4-3/4" bit and TIH to COTD. Circulate hole clean. (Note: COTD is @ ~2828').
- 6. TIH w/ 2-3/8" tubing string configured for downhole pump and land @ 2823'. Purge valve will be on bottom, followed by pup joint, perforated sub, and seating nipple. Space out as needed with pup joints.
- 7. Hang tubing in donut. ND BOP / NUWH.
- 8. TIH w/ new 1.25" top hold down pump, 3/4" Grade D sucker rods w/ spray metal couplings, polished rod, and polished rod liner. (Note: Vendor contact is listed below)
- 9. Seat the downhole pump, hang horses head, and space out pump.
- 10. Load tubing, and pressure test.
- 11. Start pumping unit and test (adjust spacing as required).
- 12. RDMO.

COMPLY WITH ALL FEDERAL, STATE AND LOCAL RULES AND REGULATIONS RELATING TO OIL AND GAS OPERATIONS.

Bruce (), Boy 5-26-99
Approved: Drilling Jupt.


Prepared: D.W. Mussett

Pump vendor: ENERGY PUMP

Leo Noyes @ 564-2874

Howell G Com 300 April 23, 1999 Basin Fruitland Coal

Unit F, Section 6, T30N, R8W, San Juan County, New Mexico

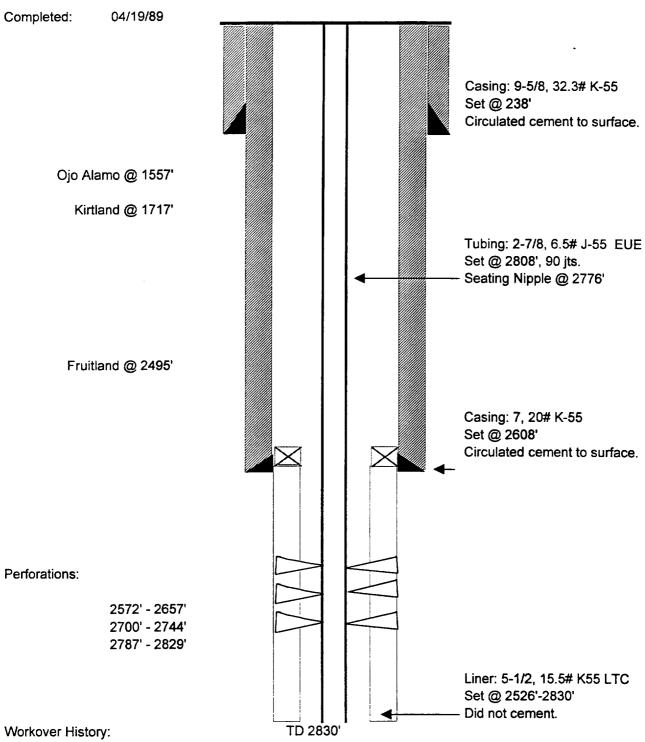

6/93 Replace tbg. To 2-7/8" & 4-1/2"

7/95 Recavitated wellbore, replaced liner & tbg PBTD 2828'