Submit to Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies

1a. Type of Work:

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-101 Revised 1-1-89

DISTRICT I P.O. Box 1980, Hobbs, NM 88240

OIL CONSERVATION DIVISION 310 Old Santa Fe Trail, Room 206 Sanza Fe, New Mexico 87503

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

CHOG FOR NE

CONDITIONS OF APPROVAL, IF ANY:

API NO. (a	signed by OCD on New W	ells)
	6-045-28734	<u>/</u>
	Type of Lease	
	STATE	FEE X

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aziec, NM 87410

20-045-28/34	
5. Indicate Type of Lease	
STATE	FEE X
6. State Oil & Gas Lease No.	

7. Lease Name or Unst Agreement Name

	L 🖾 RE-ENTER	DEEPEN	PLUG BACK	Gallegos Cany	yon Unit	
b. Type of Well: OIL GAS WELL WELL		SINGLE ZONE	MULTELE D			
2. Name of Operator BHP Petroleum (Americas) Inc. 2. Name of Operator 3. Well No. 410						
3. Address of Operator				9. Pool name or Wildcat		
5847 San Feli	pe, Ste. 3600,	Houston, Texas	77057	Basin Fruitla	and Coal	
4. Well Location						
Unit LetterF	. 2185 Feet Fr	on The South	Line and <u>182</u>	5 Feet From The _	West Line	
Section 35	Towns	hip 29N Ra	nge 12W	NMPM San Juan	County	
		10. Proposed Depth		Formation	12. Rotary or C.T.	
13. Elevations (Show wheth	or DE PT CP etc.)	1525 4. Kind & Status Plug. Bond	15. Drilling Contracto	Fruitland Coal	Rotary Date Work will start	
5360' GR	Er Dr. KI, OK, EE.	Blanket	Unknown	1	n as approved	
17.	PR	OPOSED CASING AN			r ds approved	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP	
8-3/4"	7"	20#	+- 140'	50	surface	
6-1/4"	4½"	10.5#	1525'	180	surface	
	It is proposed to drill the subject well to 1750' with the primary production anticipated in the Fruitland Coal Formation.					
Estimated For	•	Ojo Ala Kirtlan Fruitla	ıd	1014'	CEIVE	
UNLESS DRILLIN	G IS COMMENCED.		ruitland Coal	1302'	Deel U 1992	
			ed Cliffs	1325'	CON. DIV	
WITHIN 10 DAYS. TD 1525'						
B.O.P.E. will consist of a 2000# Reagan bladder type preventor, pipe rams and blind ram B.O.P.E. IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DESPEN OR FLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE						
IN ABOVE SPACE DESC ZONE, GIVE BLOWOUT PREVE		AM: IF PROPOSAL IS TO DEEPE	OR FLUG BACK, GIVE DATA O	N PRESENT PRODUCTIVE ZONE AN	D PRUPOSED NEW PRODUCTIVE	
Carl	tion above is true and complete to	the best of my knowledge and belie		fairs Coordinato	7/28/92	
TYPE OR PRINT NAME Ca	arl Kolbe	m.			30-5301	
(This space for State Use)					8-3-82	
	= 13 m	- L'a m	DEPUTY OIL & GAS II	NSPECTOR DIST 463 DATE	AUG 0 3 1992	

ing Marin pagamanan paga Marin pagamanan paga Submit to Appropriate District Office State Lease - 4 copies Fee Lease - 3 copies

00/4

N89°59'E

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-102 Revised 1-1-89

DISTRICT I P.O. Box 1980, Hobbs, NM 88240 OIL CONSERVATION DIVISION P.O. Box 2088

DISTRICT II P.O. Drawer DD, Artesia, NM 88210 Santa Fe, New Mexico 87504-2088

DISTRICT III 1000 Rio Brazos Rd., Aziec, NM 87410


WELL LOCATION AND ACREAGE DEDICATION PLAT

All Distances must be from the outer boundaries of the section


Operator				Lease				Well No.	
внр р	etroleum (am	ERICAS) INC.	tı	GALLEC	GOS CANYON	UNIT			410
Init Letter	Section	Township		Range			County		
K	35	29 1	N .	12 W		NMP	M S	an Juan	
tual Footage L	ocation of Well:			The state of the s			\$73- Caragan		
2185	feet from the	South	line and	1825		feet fro	m the W	est line	
ound level Elev		ng Formation		Pool				Dedicated A	Acreage
5360	Fruitia	and Coal			ruitland Co			320	Acres
3. If m uniti If answ	ore than one lease is do ore than one lease of di ization, force-pooling, et Yes ver is "no" list the owner orn if neccessary.	fferent ownership is duc.? No If answ	edicated to the	well, have the ince of consolidation	nterest of all owners	s been con	solidated by co	-	
No allo or until	owable will be assigned a non-standard unit, eli	minating such interes	, has been app	proved by the Div	(by communitizatio vision.	n, unitizati	on, forced-poo	ling, or otherwis	e)
SO 660 95	90 i320 i650 i94	0 2310 2640	2000	1500 10	90 500	≕ °	OPER/	ATOR CERT	IFICATION
	S89°47'W			79.42c	м.				the information
			· 			Ed.		rein in true an owledge and bel	id complete to ti
				ĺ		1	Jes. 0, m, 20	owiende men oer	······································
	1			Ì			Signature	10.11	
	}			i			(ALL)	Kalle	
	1			i			Printed Name	1000	
	, I			1		- -	Carl Kol	he	
	r I				W 無 (A)		Position		
	1			4 2	7 6	, × ,	Reg. Af	fairs Co	ordinator
			古古一	+-	— - 	- 18	Company		
	i			JJ 3 b 198	72	8	BHP Pet	roleum (Americas)
				i		100	Date	·	
	I			CON.	DIV ,		7/28/92		
	1	}	- i 40	4	D1 V .	1			
	1			LIST. 3			SURVI	EYOR CERT	IFICATION
	1			Į.		1			
	ŀ			1					ell location show com field notes
///	/ / /	(3 5)-	77	111	,,,,,	- 			me or under n
/ /			/ / /	////	////	/	supervison,	and that the :	same is true at
1825	, I			1		1		the best of m	y knowledge as
				I I			belief.	6-16-9	2
	!			l I		4	Date Survey	ed .	· · · · · · · · · · · · · · · · · · ·
	į l			l		<i>\</i>	Will	iam R. Ma	hnke II
				I		//	Signature &	SEN W. MAI	
				+		(NORTH	Professional	iam R. Ma ME. MAA ME. ME.	WEYOR II 34 V
				l ı		/	Certificate N	8466	<i>1</i> ~ 1
	[1		/	10	POFESSIONAL)	OMA
	1			1		1		TANOISE TAN	
, ,		, ,	, , ,	/ / /	, , , , ,	1			

79.80cm.

BHP PETROLEUM (AMERICAS) INC. G.C.U. #410 2185'FSL & 1825'FWL Sec.35, T29N, R12W San Juan Co., N.M.

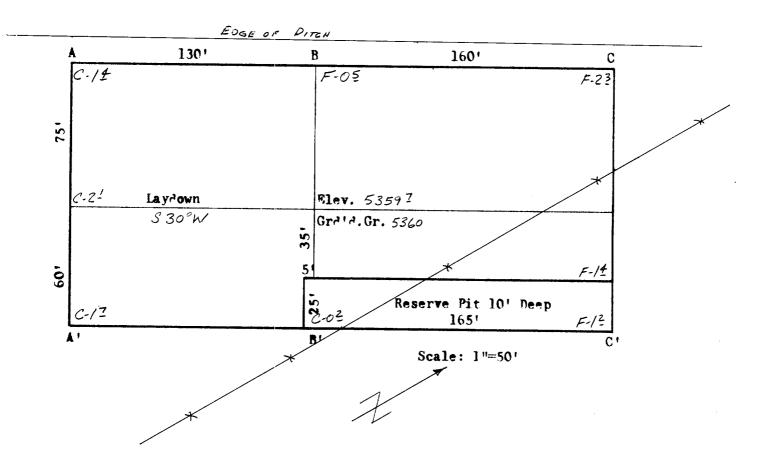

A-A'	Vert.: I" = 30'	Horiz.: I"= 100	C/L
5360		+ -	
5350		<u> </u>	
B-B'			
5360		<u> </u>	
5 350		<u> </u>	
		<u> </u>	
C-C'			
5360		-	
5350		 	

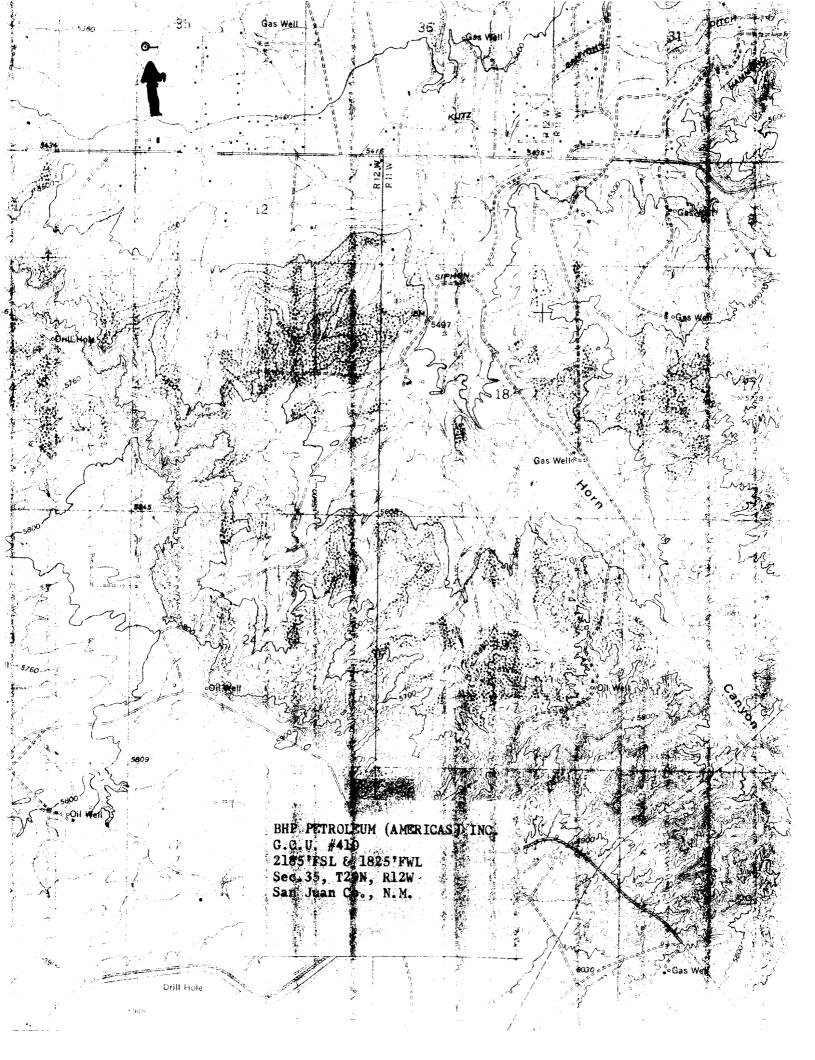

BHP PETROLEUM (AMERICAS) INC. GALLEGOS CANYON UNIT NO.410 2185'FSL & 1825'FWL SECTION 35 T29N-R12W SAN JUAN COUNTY, NEW MEXICO

TEN POINT PROGRAM

Surface Formation: Nacimiento or valley fill

2. & 3. **E**:

4.

Estimated Formation Tops:

<u>Formation</u>	$\underline{\mathtt{Top}}$	Expected Production
Ojo Alamo	48'	
Kirtland	223'	
Fruitland	1014'	
Upper Fruitland Coal	1165'	Gas
Basal Fruitland Coal	1302'	Gas
Pictured Cliffs	1325'	Gas
Total Depth	15251	

Casing and Cementing Program: A string of 7" 20# K-55 ST&C casing will be set at ±140' in an 8-3/4" hole and cemented to the surface in a single stage with 50 sx Class "B" cement (yield 1.18 cf/sk) containing 3% CaCl, and 1/4 lb/sk celloflake. Slurry volume assumes 100% excess over calculated hole volume. If the cement job does not circulate to surface, cement will be topped off using 1" pipe down the 8-3/4" by 7" annulus. Centralizers will be run on the bottom two joints as long as boulders were not encountered while drilling the surface hole. If boulders are encountered while drilling the surface hole, no centralizers will be run. Minimum clearance between couplings and hole is 1.094". Prior to drilling out the shoe, casing and BOPE will be tested to a minimum of 2000 Safety factors utilized in the design of this casing string were: burst = 1.1; collapse = 1.125; and tension = 1.8or 100,000 lb overpull, whichever is greater.

A production string of 4-1/2", 10.5# K-55 ST&C casing will be run from the surface to total depth in a 6-1/4" hole. This string will be cemented to the surface with a minimum of 180 sx of 50-50 pozmix containing 2% gel, 10% salt and 1/4 lb/sk celloflake (yield = 1.26 cf/sk) followed by 50 sx of Class "B" cement containing fluid loss additive (yield = 1.18 cf/sk). Slurry volume assumes a 50% excess over calculated hole volume. Cement volume is subject to change after review and recalculation of hole volume from the open hole calipers. If the primary cement job does not circulate to surface, the cement will be topped off using 1" pipe down the 6-1/4" by 4-1/2" annulus. Centralizers will be spaced such that a minimum of two are located above and two are located below the Basal Fruitland Coal; and, a minimum of one centralizer will be run just below the base and another into the base of the Ojo

GALLEGOS CANYON UNIT # TEN POINT PROGRAM, continued

Alamo. Minimum clearance between couplings and hole is 1.25". Prior to perforating the casing for any attempted completion, the casing will be tested to a minimum of 2500 psi. Safety factors utilized in the design of this casing string were: burst = 1.1; collapse = 1.125; and tension = 1.8 or 100,000 lb overpull, whichever is greater.

Following the completion of the cementing operations, a sundry notice detailing the cement volumes and densities for each job will be submitted.

Pressure Control Equipment: (See attached schematic diagrams.)
A minimum of a 2M psi BOP well control system will be utilized. BOP's and choke manifold will be installed and pressure tested before drilling out under surface casing and then will be checked daily as to mechanical operation condition. Ram type preventors will be tested to 2M psi. The annular preventor will be tested to 50% of its working pressure.

A full opening internal blowout preventor or drill pipe safety valve will be on the drill floor at all times and will be capable of fitting all connections.

6. Mud Program: A fresh water low solids, non-dispersed mud system will be used to drill this well. Sufficient materials will be on location at all times to maintain mud properties and to control any unforeseen lost circulation problems or abnormal pressures in the Farmington sands within the Kirtland formation. All drilling fluids will be contained in an earthen pit. At the completion of drilling, the drilling fluid will be hauled off to be used for another well. The remaining accumulation of solids in the pit will be allowed to dry out and the pit will be covered up.

Mud program is as follows:

Interval (ft)	<u> Mud Weight (ppg)</u>	Viscosity (sec/qt)
0 - 1000	8.4 or less	30 - 38
1000 - TD	9.3 or less	40 - 55

- 7. Auxiliary Equipment: An upper kelly cock with handle available will be utilized. At a minimum, a flow sensor will be installed in the system and the mud volume will be visually monitored constantly.
- 8. <u>Logging Program:</u> SP-DIL and GR-FDC-CNL logs will be run from TD to surface casing shoe depth.

Coring Program: No cores are planned.

GALIEGOS CANYON UNIT # TEN POINT PROGRAM, continued

Testing Program: No tests are planned.

<u>Stimulation Program:</u> Perforate the Basal Fruitland Coal with 4 JSPF and fracture stimulate with a minimum of 30,000 Bbls of 20/40 mesh sand in either a 70 quality nitrogen foam system or a cross-linked gelled water system.

9. <u>Abnormal Pressure:</u> Although not expected, abnormal pressures are possible in the Farmington sands of the Kirtland formation.

Estimated Bottom Hole Pressure: 600 psi

10. Anticipated Starting Date: As soon as all required approvals are received.

<u>Duration of Operation:</u> It is estimated that a total of 4 days will be required for drilling operations and 5 days for completion operations.

