
Form 3160-5		1	FORM APPROVED
(June 1990)			Budget Bureau No. 1004-0135
75 (1) (1)		Expires: March 31, 1993	
UNITED STATES		5. Lease Designation and Serial No.	
DEPARTMENT OF THE INTERIOR		SF-081226-B	
BUREAU OF LAND MANAGEMENT		6. If Indian, Allottee or Tribe Name	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to deepen or reentry to a different reservoir,			7 ISIL-ia CA A
Use "APPLICATION FOR PERMIT" for such proposals			
SUBMIT IN TRIPLICATE Horseshoe Gallup Unit			
1. Type of Well X Oil Well Gas Well	Other		8. Well Name and No. BGU #266
2. Name of Operator		DE JUNE Z. O 18	9. API Well No.
Central Resources, Inc.	······································		<u>> 07</u> 30- 045-09782
3. Address and Telephone No.			Di Pick and Pool, or Exploratory Area
P.O. Box 1247, Bloomfield, New Mex		हि जाशान	Horseshoe Gallup Unit
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)			11. County or Parish, State
425' FNL, 1680' FWL, Sec. 10, T30N,			San Juan County, NM
12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	- Tel 11 1	TYPE OF ACTION	
V Notice of Internal	X Abandonment	==	Change of Plans
X Notice of Intent	Recompletion		New Construction
Subsequent Report	Plugging Back		Non-Routine Fracturing
Subsequent Report	Casing Repair		Water Shut-Off
Final Abandonment Notice	Altering Casing		Conversion to Injection
Final Abandonment Notice	Other		Dispose Water e: Report results of multiple completion on Well
		Com	pletion or Recompletion Report and Log form.)
13. Describe Proposed or Completed Operations (Clearly state all pertinent dates, including estimated date of starting any proposed work. If well is			
directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*			
Procedure:			
Central Resources, Inc. will plug the well during 2000 as follows:			
a. Clear hole of all reasonably recoverable production equipment.			
b. Set retainer at 1460' and pump 12 sx cement below retainer and spot 15 sx cement on top.			
c. Perforate at 150'.			
d. Break circulation out bradenhead and pump 55 sx cement to circulate 1 bbl and leave casing and annulus full.			
e. Set marker and reclaim location.			
Appropriate notifications will be made in advance of plugging operations.			
Appropriate Hermodicals will be made in advance of plegging operations.			
	· · · · · · · · · · · · · · · · · · ·		
14. I hereby certify that the foregoing is true and co			
Signed Moule 1. Soci	Title District Manag	ger Da	te June 7, 1999
Rodney L. Septe			
(This space for Fedgraphy Sine Owce Spence	er Title Team Lead, F	Petroleum Management Da	te 2 (99)
Conditions of approval, if any:	1100	Da	L
Title 18 U.S.C. Section 1001, makes it a crime for any per- fictitious or fraudulent statements or representations as to a		to any department or agency	of the United States any false,

CONTROL OF CONTROL OF

*See Instruction on Reverse Side

CENTRAL RESOURCES, INC.

HORSESHOE GALLUP #266

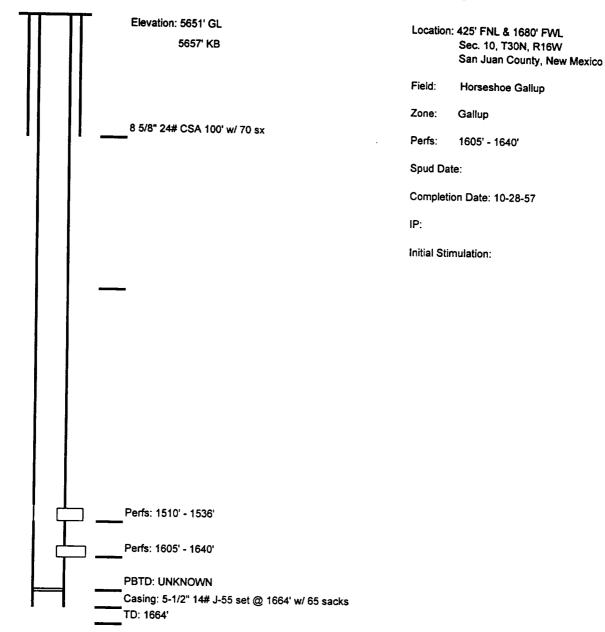

5-10-93 Lay down tbg ? and rods. Passed MIT 540 psi for 30 minutes. 6-26-97 Bradenhead test 2 psi cp, 0 psi bradenhead.

86-7-99