

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other

2. NAME OF OPERATOR

SUPRON ENERGY CORPORATION

3. ADDRESS OF OPERATOR

P.O. Box 808, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 955 ft./South & 820 ft./West line

AT TOP PROD. INTERVAL: Same as above

AT TOTAL DEPTH: Same as above

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐CHANGE ZONES ☐ABANDON* ☐

(other) Changes to form 9-331C

5. LEASE

N.M. 06738

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Sanchez

9. WELL NO.

4

10. FIELD OR WILDCAT NAME

Aztec Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 35, T-30 N, R-10 W
N.M.P.M.

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6085 GR.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Changes and additions to Form 9-331 C dated 7-23-79.

We propose to drill an 9-7/8" surface hole to 250 feet and run new 7-5/8", 20.00 lb., H-40 casing and cement from 250 feet to surface with about 150 sacks of class "B" with 2% CaCl. We will then drill a 6-3/4" hole with mud through the Pictured Cliffs zone to about 2750 feet. New 2-7/8", 6.50#, E.U.E. tubing will be run to T.D. and cemented with 150 sacks of 65-35-6 with 1/4# of flakes per sack and followed with 50 sacks of class "B" cement. It will be perforated and stimulated in the Pictured Cliffs zone. No tubing will be run inside the 2-7/8"

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

Kenneth E. Roddy

TITLE Production Supt. DATE August 13, 1979

(This space for Federal or State office use)


APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side.

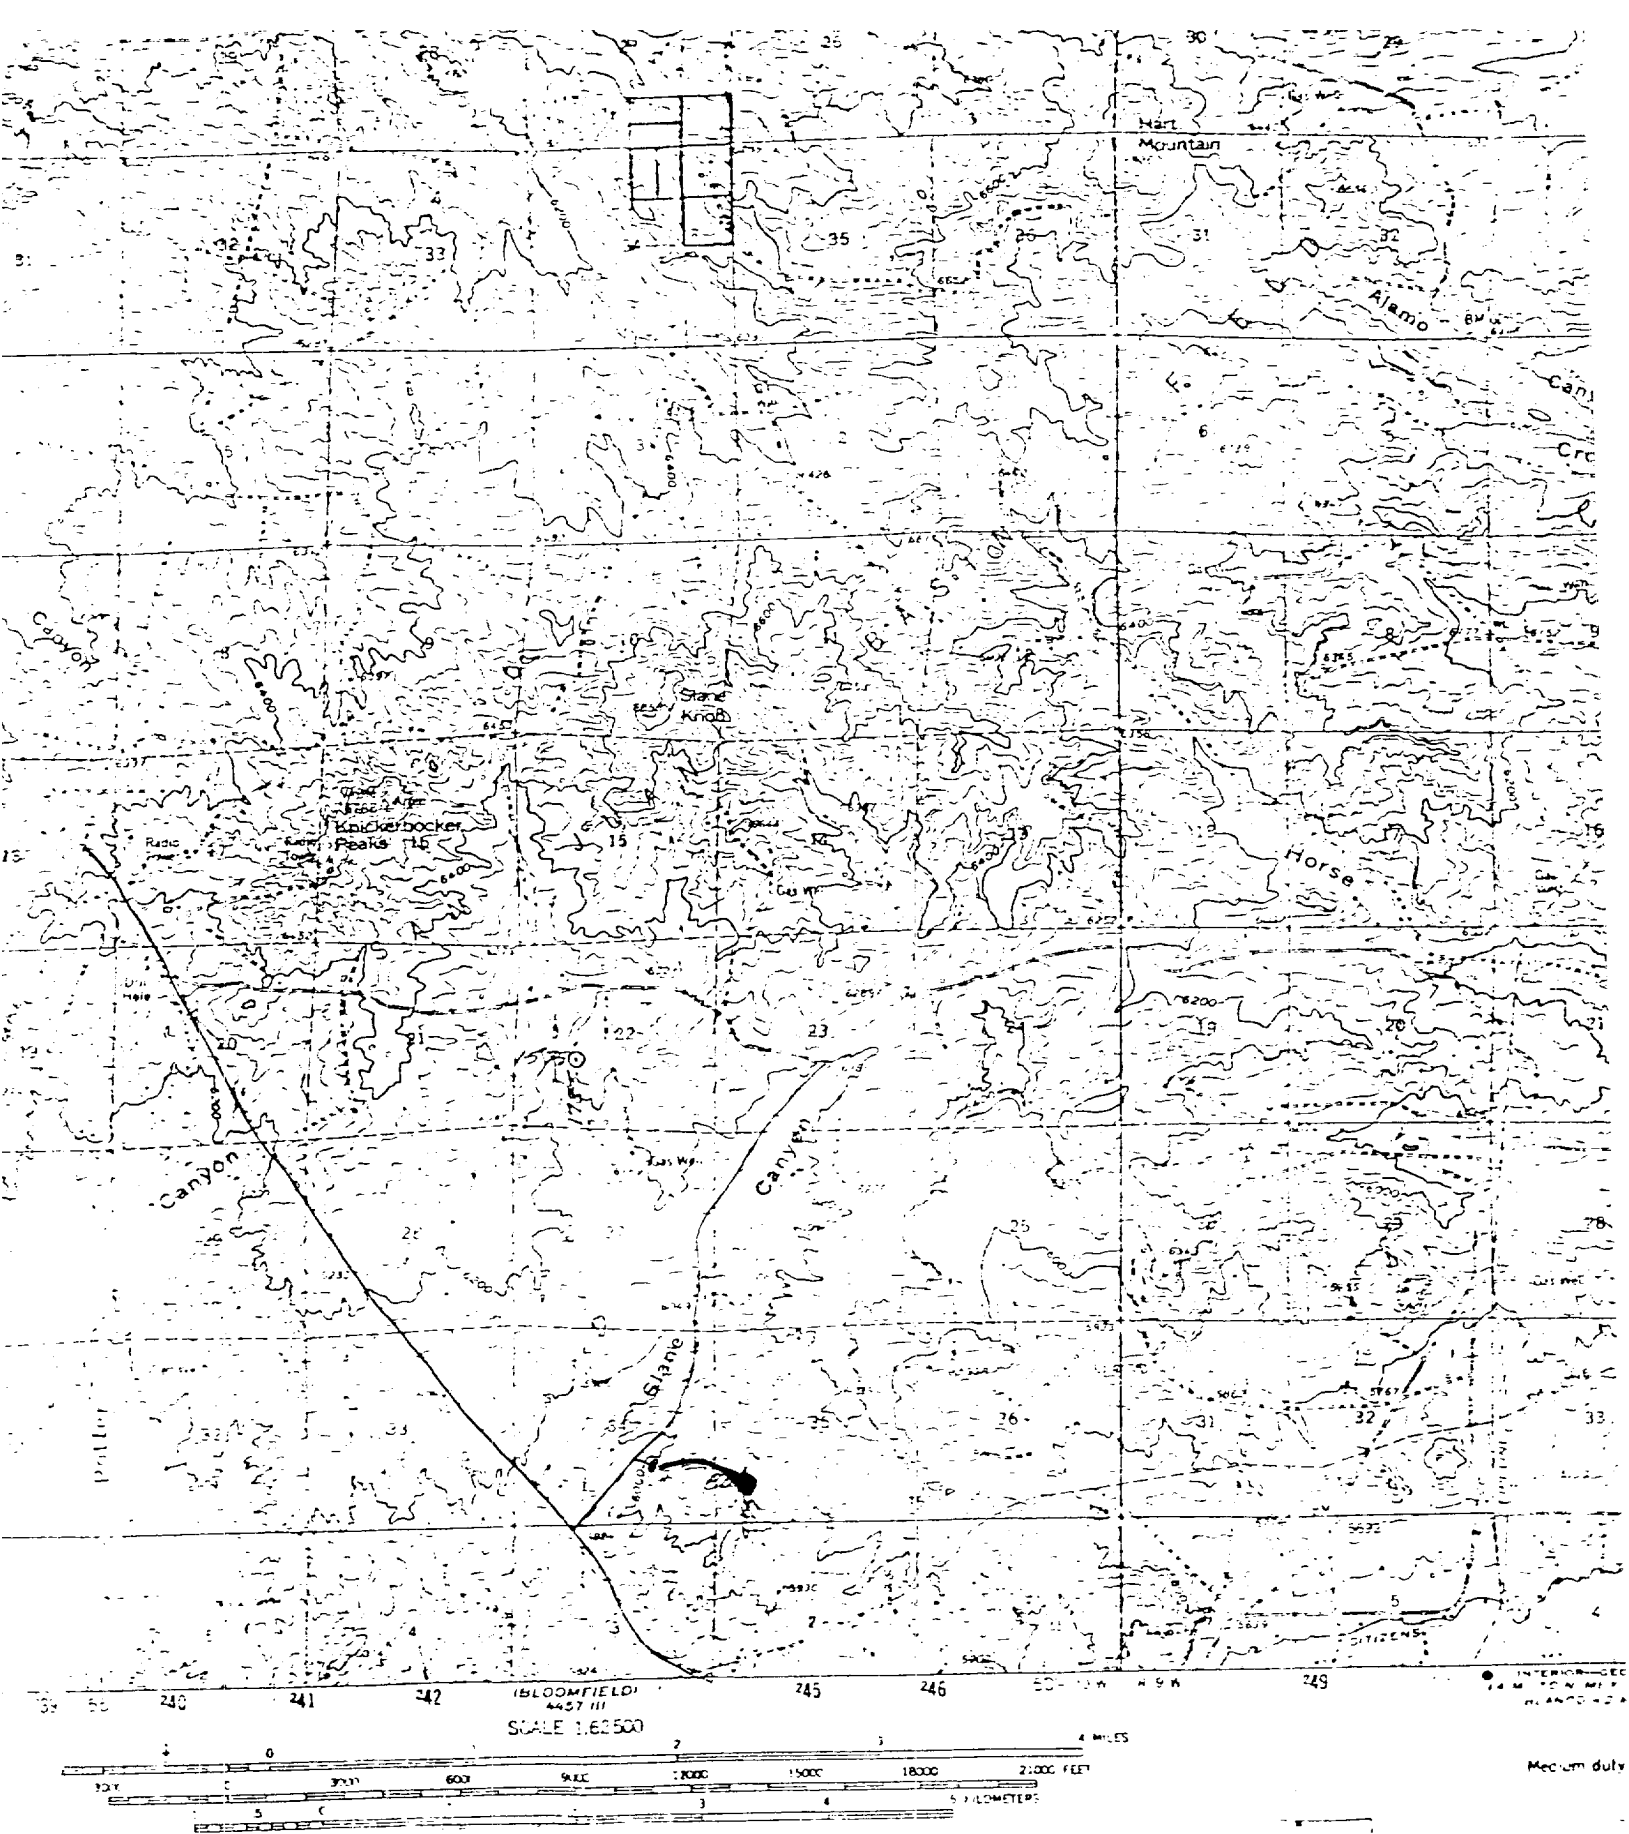

Supron Energy Corporation
 SANCHEZ #4
 SW $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 35, T30N, R10W,
 NMPL, San Juan County, N.M.
 955 F/SL - 820 F/WL
 Elevation - 6085

FOR SALE BY U.S. GEOLOGICAL
 A FOLDER DESCRIBING T

U.S. MEXICO
 WELL LOCATION