


(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYLand Office **Santa Fe**
Lease No. **061181**
Unit **San Juan 32-5**

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 23, 1960

San Juan 32-5

Well No. **2-26** is located **1850** ft. from **[N]** line and **660** ft. from **[E]** line of sec. **26**
1/4 Sec. 26 **32-N** **6-West** **N.M.P.M.**
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Undesignated **Rio Arriba County** **New Mexico**
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **6,358** ft.


DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

7/8/60. Drilled out DV Tool. Cleaned out to FBTD 8025'. Pressure of 4,000# held 10 minutes - satisfactory. On 7/9/60 perforated 7 intervals - 7855 - 7991 with 4 shots per foot. On 7/13 treated perforations with 3,000 gallons 15% MCA. Sand water fractured - 60,880 gallons water + 1% on oil and 7# per 1,000 gal. WG-3 gelling agent; 47,500# 20/40 sand flushed with 9,279 gallons water. Avg. treating pressure 4000#. Avg. injection 46.2 bpm. On 7/18 perforated 7 intervals, 5633 - 5760 - 2 shots per foot. On 7/19 sand water fractured 48,545 gallons water + 1% on oil, 7#/1000 gal. WG3 and 45,000# 20/40 sand. Flushed with 5586 gallons. Avg. inj. 64 bpm. Avg. treating pressure 2450#. On 7/19 perforated 5 intervals 5436 - 5579 at 2 shots per foot. Set Baker B at 5573', sand water fractured 26,500 gal. water - additives as above - and 30,000# 20/40 sand. Flushed with 6500 gallons. Avg. inj. 56.5 BPM. Avg. TP 2800.

See separate report for running of Mesa Verde and Dakota tubing.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

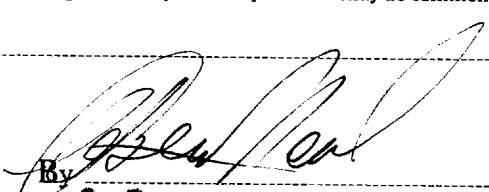Company **La Plata Gathering System, Inc.**Address **Box 728****Farmington, New Mexico.**By 
C. Deason Neal, Agent in Farmington
Title