

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR
Northwest Pipeline Corporation

3. ADDRESS OF OPERATOR
P.O. Box 90, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 565 FNL & 625 FEL
AT TOP PROD. INTERVAL: Same as above
AT TOTAL DEPTH: Same as above

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
SF 078772

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
Rosa Unit

8. FARM OR LEASE NAME
Rosa Unit

9. WELL NO.
#89

10. FIELD OR WILDCAT NAME
Blanco Mesa Verde

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 34, T32N, R6W

12. COUNTY OR PARISH
Rio Arriba

13. STATE
New Mexico

14. API NO.
30-039-22782

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6667' GR

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐



PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

(other) Intermediate & Production Csg.

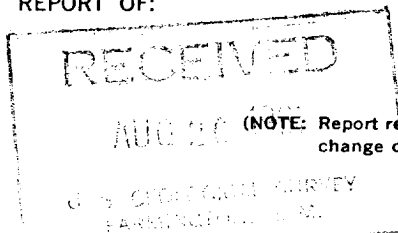

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

8-12-81 Drld to 4060'. Ran 97 jts (3978') of 7", 20#, K-55, ST&C & set @ 3990'. FC @ 3947'. HOWCO cmt'ed w/ 135 sx 65/35 poz w/ 12% gel. Tailed w/ 75 sx C1 "B" w/ 2% CaCl2. Plug down @ 1100 hrs. Displaced w/ 160 bbls wtr.

8-13-81 to 8-15-81 Drld ahead to a depth of 6091' (TD) w/ gas.

8-16-81 GO ran IES & SNP/CDL/GR logs. Ran 72 jts (2316') of 4-1/2", 10.5#, K-55, ST&C & set @ 6091' (TD). Top of liner @ 3763'. Float @ 6058'. HOWCO cmt'ed w/ 230 sx C1 "B" w/ 4% gel & 12-1/2# fine gils/sx. Displaced plug w/ 65 bbls wtr & down @ 1600 hrs. Reversed out 13 bbls cmt. Rig released @ 2000 hrs 8-16-81.

NOW WAITING ON COMPLETION.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Donna J. Brace TITLE Production Clerk DATE 8-20-81
Donna J. Brace

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

djb/

*See Instructions on Reverse Side

NMOCC

BY sm