

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE
(Other copies to be
in reverse order)

THIS FORM IS TO BE
FILLED OUT BY THE
BUREAU OF LAND MANAGEMENT

NM 30014

6. IF INTEREST, ALLOTMENT OR OTHER

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐
2. NAME OF OPERATOR
NASSAU RESOURCES, INC.
3. ADDRESS OF OPERATOR
P.O. Box 809, Farmington, N.M. 87499
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below)
At surface
1160' FNL - 1060' FWL

7. UNIT AGREEMENT NAME

Carracas Unit

Carracas Unit 33 B

#4

10. FIELD AND POOL OR WILDCAT

Basin Fruitland Coal

11. SEC., T., R., M., OR B.L. AND
SURVEY OR AREA

Sec. 33, T32N, R4W, NHPH

12. COUNTY OR PARISH 13. STATE

Rio Arriba NM

14. PERMIT NO. 15. ELEVATIONS (Show whether DF, RT, GR, etc.)
7295' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT OFF

PULL OR ALTER CASING

WATER SHUT OFF

REPAIRING WELL

FRACTURE TREAT

MULTIPLE COMPLET

FRACTURE TREATMENT

ALTERING CASING

SHOOT OR ACIDIZE

ABANDON*

SHOOTING OR ACIDIZING

ABANDONMENT*

REPAIR WELL

CHANGE PLANE

(Other) Updated BOP

X

(Other)

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting and proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Per Bureau of Land Management request, attached is an updated sketch.

RECEIVED

JUL 19 1990

OIL CON. DIV.
DIST. 3

18. I hereby certify that the foregoing is true and correct

SIGNED

Fran Perrin

TITLE Admin. Asst.

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

NMOCD

*See Instructions on Reverse Side


APPROVAL

DATE 5-25-90

JUL 16 1990

AREA MANAGER
FARMINGTON RESOURCE

BLOWOUT PREVENTER INSTALLATION

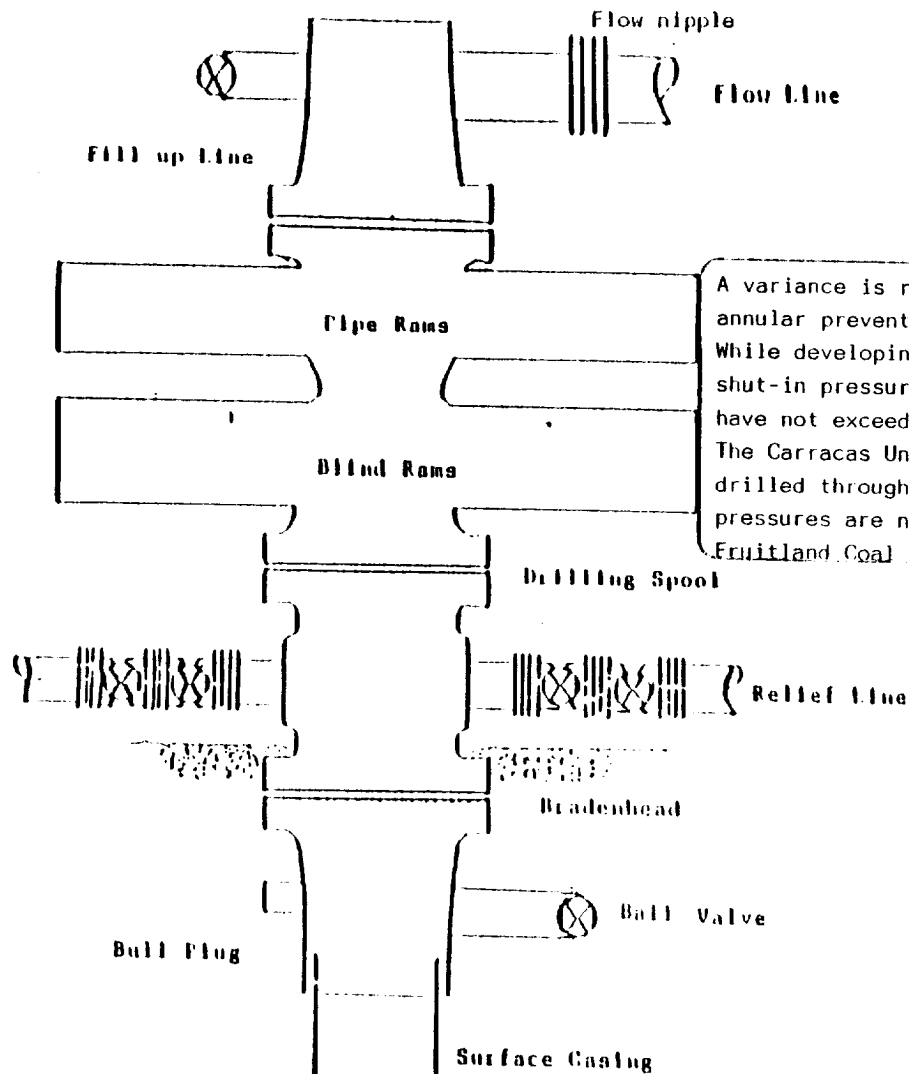

A variance is requested on the use of an annular preventer. While developing the Carracas unit, shut-in pressures after fracture treating have not exceeded 1500 psig. The Carracas Unit now has numerous wells drilled throughout the unit and higher pressures are not expected in drilling Fruitland Coal gas wells.

Series 900 Double gate BOP, rated at 3000 psi working pressure. When gas drilling operations begin, a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowline. Upper Kelly cock valve will be in place with handle on rig floor at all times along with Safety valve and subs for drill string in use.

The kill lines will be a minimum of 2".

