

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division

Sundry Notices and Reports on Wells

1. Type of Well
GAS

RECEIVED
SEP 18 1996

2. Name of Operator
MERIDIAN OIL

OIL CON. DIV.
DIST. 3

3. Address & Phone No. of Operator
PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M
990' FSL, 1650' FWL, Sec. 35, T-31-N, R-11-W, NMPM, San Juan County

API # (assigned by OCD)
30-045-10048

5. Lease Number
Fee

6. State Oil&Gas Lease #

7. Lease Name/Unit Name

Alston

8. Well No.
1

9. Pool Name or Wildcat
Aztec Pictured Cliffs/
Blanco Mesaverde

10. Elevation:

Type of Submission

Type of Action

☐ Notice of Intent	☒ Abandonment	☐ Change of Plans
☒ Subsequent Report	☐ Recompletion	☐ New Construction
☐ Final Abandonment	☐ Plugging Back	☐ Non-Routine Fracturing
	☐ Casing Repair	☐ Water Shut off
	☐ Altering Casing	☐ Conversion to Injection
	☐ Other -	

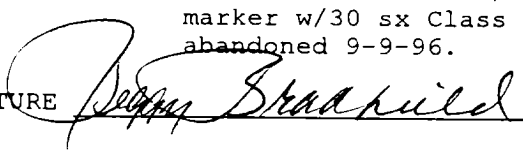
13. Describe Proposed or Completed Operations

9-5-96 MIRU. ND WH. NU BOP. TOO H w/112 jts 1" tbg. SDON.

9-6-96 TIH to 2513'. (Verbal approval to change plans from Johnny Robinson, OCD). TOO H. TIH w/5 1/2" gauge ring to 2350'. TOO H. TIH w/5 1/2" cmt retainer, set @ 2313'. Load hole & circ w/60 bbl wtr. PT csg, failed. Establish injection into Pictured Cliffs perms. Plug #1: pump 19 sx Class "B" cmt below cmt retainer into Pictured Cliffs perms. Pump 13 sx Class "B" cmt above cmt retainer, TOC @ 2198'. TOO H to 1964'. Perf 4 sqz holes @ 2000'. TOO H. TIH w/5 1/2" cmt retainer, set @ 1964'. Load hole w/wtr. PT csg to 500 psi/5 min, OK. Establish injection. Plug #2: pump 51 sx Class "B" cmt below cmt retainer outside csg to 1900'. Pump 13 sx Class "B" cmt inside csg above cmt retainer, TOC @ 1849'. TOO H. SDON.

9-9-96 TIH, perf 4 sqz holes @ 1032'. TOO H. Establish injection. TOO H. TIH w/5 1/2" cmt retainer, set @ 982'. Establish injection. Plug #3: pump 83 sx Class "B" cmt outside 5 1/2" csg below cmt retainer. Pump 19 sx Class "B" cmt on top of cmt retainer, TOC @ 814'. TOO H. TIH, perf 2 sqz holes @ 207'. TOO H. Establish circ down csg & out bradenhead. Plug #4: pump 139 sx Class "B" cmt down csg & out bradenhead. Circ 1 bbl cmt to surface behind 10 3/4" csg. WOC. ND BOP. Cut off WH. Install dry hole marker w/30 sx Class "B" cmt. RD. Rig released. Well plugged and abandoned 9-9-96.

SIGNATURE


 Regulatory Administrator September 17, 1996

(This space for State Use)

Approved by

Title

Date

 Deputy Oil & Gas Admin 12-10-97