

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Form Approved.
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐
well well
2. NAME OF OPERATOR
W.M. Gallaway
3. ADDRESS OF OPERATOR
101-2 Petroleum Plaza Bldg. Farmington, N.M.
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660' FNL 660' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

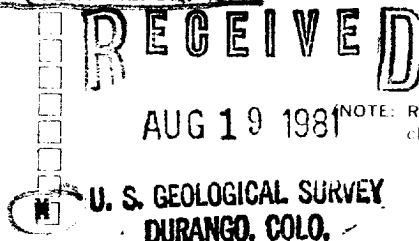

5. LEASE
14-20-604-1893
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
UTE MOUNTAIN INDIAN
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
UTE INDIAN D
9. WELL NO.
14
10. FIELD OR WILDCAT NAME
VERDE GALLUP
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 24, T31N, R15W
12. COUNTY OR PARISH
SAN JUAN
13. STATE
N.M.
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
5589

NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

5/8/81 Filled hole w/gel water, circulated hole w/45⁰ tubing sub.
Spotted 14 sks. cement across Gallup perms. 2607'-2570'
and continued up 5½" to 2506

5/9/81 Tagged cement @ 2503'
Spotted 29 sks. cement across top of Point Lookout 1250'-1350'

6/3/81 Stretch csg. and shot @ 843'
Spotted 29 sks. cement across 5½" stub 893'-793'

6/4/81 Spotted 20 sks cement across bottom of surface 50'

6/6/81 Spotted 10 sks cement top of surface, erect dry hole marker, and clean location.

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

David J. Miller TITLE *Agent*

DATE

8/14/81

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY.

David J. Miller

TITLE

Area Manager

DATE

FEB 24 1984

*See Instructions on Reverse Side

RECEIVED

FEB 28 1984

OIL CON. DIV.
DIST. 3