


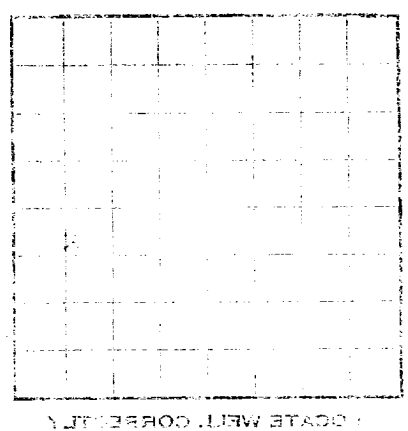

LOG OF OIL OR GAS WELL

1. Name of well, location, and owner: _____
2. Date of completion: _____
3. Name of driller: _____
4. Name of operator: _____
5. Name of recorder: _____
6. Name of witness: _____
7. Name of supervisor: _____
8. Name of engineer: _____
9. Name of geologist: _____
10. Name of geophysicist: _____
11. Name of chemist: _____
12. Name of biologist: _____
13. Name of physicist: _____
14. Name of mathematician: _____
15. Name of astronomer: _____
16. Name of meteorologist: _____
17. Name of oceanographer: _____
18. Name of environmental scientist: _____
19. Name of social scientist: _____
20. Name of other: _____

Well plugged and abandoned as a dry hole December 7, 1957.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Set plug in top of casing w/10 sack cmt.
Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.

On swabbing and pumping tests recovered all but 162 bbls load oil.
Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.
On swabbing and pumping tests recovered all but 162 bbls load oil.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.

Set plug in top of casing w/10 sack cmt.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Well plugged and abandoned as a dry hole December 7, 1957.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.
On swabbing and pumping tests recovered all but 162 bbls load oil.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.
On swabbing and pumping tests recovered all but 162 bbls load oil.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.

Set plug in top of casing w/10 sack cmt.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Well plugged and abandoned as a dry hole December 7, 1957.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.
On swabbing and pumping tests recovered all but 162 bbls load oil.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.
On swabbing and pumping tests recovered all but 162 bbls load oil.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.

Set plug in top of casing w/10 sack cmt.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Well plugged and abandoned as a dry hole December 7, 1957.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.
On swabbing and pumping tests recovered all but 162 bbls load oil.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

Set 97' of 8-5/8" csg at 111' w/125 sack of neat cement, cmt. circulated.
The well was drilled to a total depth of 2625'.

Set 2613' of 5-1/2" csg at 2624' w/150 sack neat cmt. w/3 pound floccle per sack.
On swabbing and pumping tests recovered all but 162 bbls load oil.

Sand-oil traced thru beris w/35,322 gals crude oil and 50,000# sand. Used 270 gals sealers.
Set Baker Model "K" cast iron retainer at 2700'. Squeezed beris from 2700' to 2700' on top of bridge plug.

Set plug in top of casing w/10 sack cmt.
The reason for the condition of the well at above date is _____
Signed _____
Date _____

Well plugged and abandoned as a dry hole December 7, 1957.
The reason for the condition of the well at above date is _____
Signed _____
Date _____